



MODEL NO.	PART NO.	LENGTH (A)	TOLERANCE (TOL)	RESISTANCE (Ω)
VBV-L430	2108	30M	± 200MM	≤ 6.7
VBV-L425	3513	25M	± 150MM	≤ 5.6
VBV-L420	1380	20M	± 150MM	≤ 4.5
VBV-L415	3150	15M	± 150MM	≤ 3.4
VBV-L412	3106	12M	± 150MM	≤ 3.4
VBV-L410	1386	10M	± 150MM	≤ 2.3
VBV-L407	3151	7M	± 150MM	≤ 2.3
VBV-L406	3152	6M	± 150MM	≤ 2.3
VBV-L405	1499	5M	± 80MM	≤ 2.3
VBV-L404	3153	4M	± 80MM	≤ 2.3
VBV-L403	4977	3M	± 80MM	≤ 1.5
VBV-L4025	1554	2.5M	± 80MM	≤ 1.2
VBV-L4005	3154	0.5M	± 20MM	≤ 1.0

VIEW A-A

CABLE BUILDUP

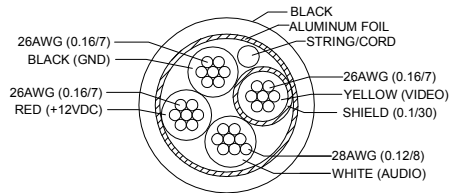

CABLE BINDING SPECIFICATION

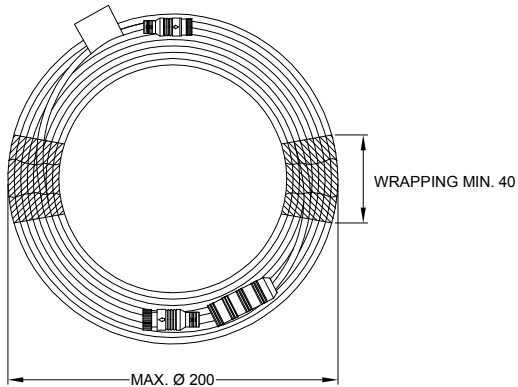


NOTES:

1. PROTECTIVE BOOT SHOULD BE WITHIN 200MM OF CONNECTOR A.
2. FOR GENERIC CABLE LABEL DETAIL REFER TO LATEST REVISION OF BE-001500-XX-11.
3. ENSURE PROTECTIVE BOOT IS USED IN INSTALLATION.
4. INTERNAL CABLES SHOULD BE ONE CONTINUOUS LENGTH BETWEEN CONNECTORS.
5. FOR MANUFACTURING CONTROLS PLEASE REFER TO ASSEMBLY PLANT DRAWING #SV10-8 REVISION 1.3.
6. CABLE TO BE PROVIDED IN A SUITABLE ADEQUATELY SIZED BAG WITH GIFTBOX LABEL AFFIXED TO THE CENTRE.
7. FOR GIFTBOX LABEL REFER TO LATEST REVISION OF BE-002144-XX-12.

PROPRIETARY NOTICE


THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

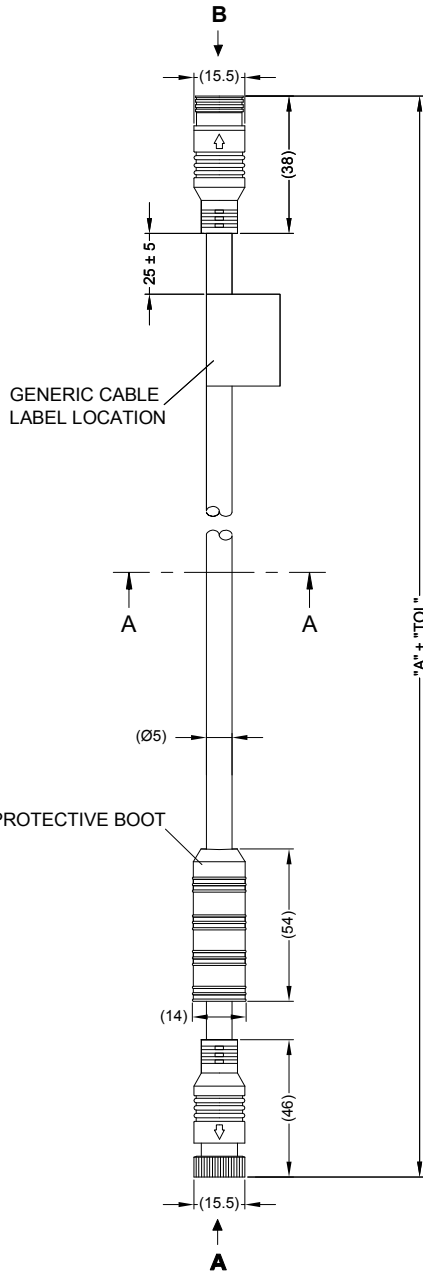

Revision Notes.

R2 - ADDED TOLERANCE TO TABLE, ADDED NEW CABLE LENGTHS				
APA: -	Drawn:-	Checked:-	Approved:S.MATTHEWS	Date: 17/09/09
R3 - STOCK CODE CORRECTED ON 10M CABLE, LABEL LOCATION ADDED				
APA: -	Drawn:-	Checked:D.KERAI	Approved:S.MATTHEWS	Date: 16/12/09
R4 - NOTES ADDED, NEW PART NUMBER ADDED TO TABLE, LABEL LOCATION CHANGED				
APA: -	Drawn:-	Checked:D.KERAI	Approved:S.MATTHEWS	Date: 19/10/10
R5 - MANUFACTURING CONTROLS ADDED IN NOTES.				
APA: -	Drawn:-	Checked:J.NEWMAN	Approved:D.KERAI	Date: 11/11/11
R6 - CONNECTOR PINOUT CORRECTED, PACKAGING SPECIFIED, CROSS SECTION ADDED.				
APA: X. HUANG	Drawn:-	Checked:B.CHILDS	Approved:S.MATTHEWS	Date: 19/11/12
R7 - 3M VARIANT ADDED, FRAME UPDATED & PINOUTS UPDATED.				
APA: X. HUANG	Drawn:B.CHILDS	Checked:R.BATES	Approved:D.WALLIN	Date: 16/09/15


VIEW B



4 PIN MALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	RED	+12v
2	BLACK/SHIELD	GND
3	WHITE	AUDIO
4	YELLOW	VIDEO

VIEW A

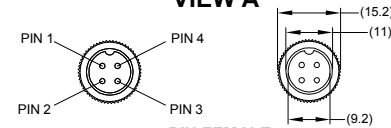

4 PIN FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	RED	+12V
2	BLACK/SHIELD	GND
3	WHITE	AUDIO
4	YELLOW	VIDEO

Assembly Pl Approval -	Approved by D.KERAI	Checked by D.KERAI	Drawn by M.BUTLER
Angle of Projection 	Units mm	Scale N/A	Released 21/01/06
	Status RELEASED	VBV-LSERIES CABLE	
	Part No VARIOUS	BE-000450-07-06	

BRIGADE
www.brigade-electronics.com