



MODEL NO.	PART NO.	LENGTH (A)	TOLERANCE (TOL)
BN360-L120	4493	20M	-200/+800mm
BN360-L115	4495	15M	-200/+800mm
BN360-L110	4496	10M	-100/+600mm
BN360-L105	4498	5M	-100/+400mm
BN360-L103	5845	3M	-100/+200mm
BN360-L1025	4499	2.5M	-100/+200mm

R3

Revision Notes.				
R1 - UPDATED WIRE COLOUR, CABLE CROSS SECTION & DRAWING FRAME				
APA: Y.J.LEE 14.03.16	Drawn:M.POTTER	Checked:R.BATES	Approved:B.CHILDS	Date: 11/05.16
R2 - CABLE SPECIFIACION UPDATED AS PER ECR-A498				
APA: Y.J.LEE	Drawn:S.LAVER	Checked:D.RICHARDSON	Approved:B.JOHN	Date: 20/04/17
R3 - BN360-L103 (5845) ADDED				
APA: A.LEE 12/06/18	Drawn:B.CHILDS	Checked:A.FOSTER	Approved:D.WALLIN	Date: 12/06/18

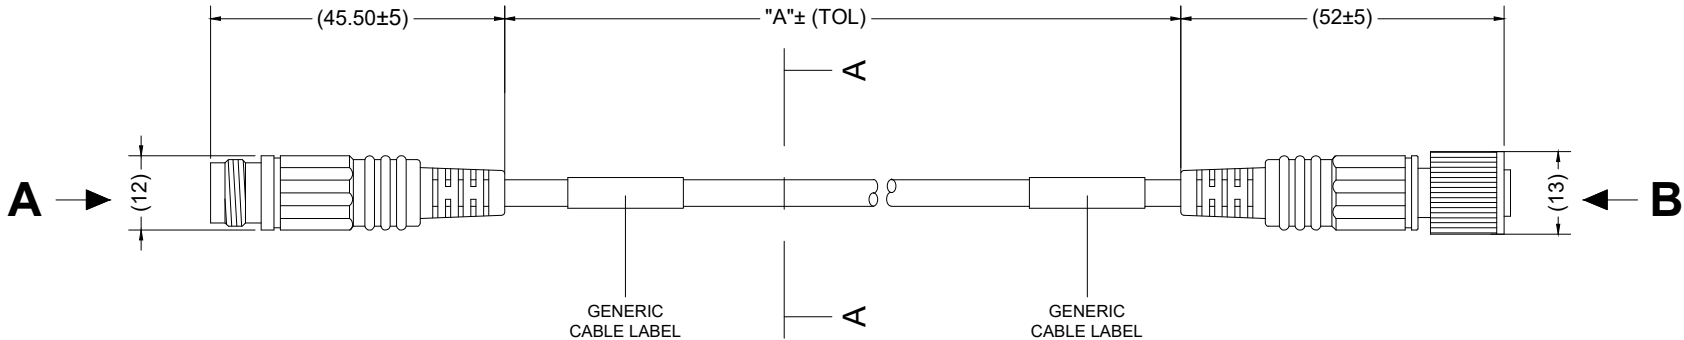


VIEW A




6 PIN MALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	N/A	N/C
2	RED	5.2V DC
3	YELLOW	VIDEO
4	N/A	N/C
5	N/A	N/C
6	SHIELD	GND

VIEW A-A

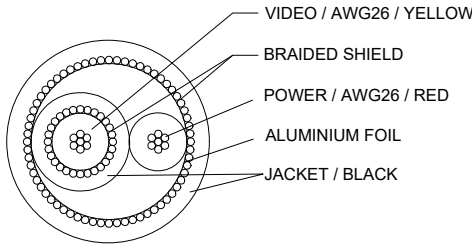

VIEW B



6 PIN FEMALE MATING FACE

PIN #	WIRE COLOUR	DESCRIPTION
1	N/C	N/A
2	RED	5.2V DC
3	YELLOW	VIDEO
4	N/C	N/A
5	N/C	N/A
6	SHIELD	GND

- NOTES
- FOR GENERIC CABLE LABEL REFER TO LATEST REVISION OF DRAWING BE-002644-XX-13
 - INTERNAL CABLES SHOULD BE ONE CONTINUOUS LENGTH BETWEEN CONNECTORS
 - CABLE PROVIDED IN A SUITABLE ADEQUATELY SIZED BAG

PROPRIETARY NOTICE

THIS DESIGN AND TECHNICAL INFORMATION APPEARING ON THIS DRAWING IS THE PROPERTY OF BRIGADE ELECTRONICS, AND IS DISCLOSED IN CONFIDENCE. IT IS NOT TO BE COPIED, REPRODUCED, REVEALED TO OR EXPROPRIATED BY OTHERS, EITHER IN WHOLE OR IN PART WITHOUT THE EXPRESS WRITTEN CONSENT OF BRIGADE ELECTRONICS.

BRIGADE

www.brigade-electronics.com

Assembly Pl Approval Y.J.LEE 13/11/13	Approved by G.P.LITH	Checked by R.BATES	Drawn by M.POTTER
 Third Angle	Units mm	Scale N/A	Released 14/11/13
	Status RELEASED	BN360-LXXX	
	Part No SEE TABLE	BE-002590-03-13	