


Product Specification



Brigade Model Number:
Part Number:

BE-HXXXX
See table below

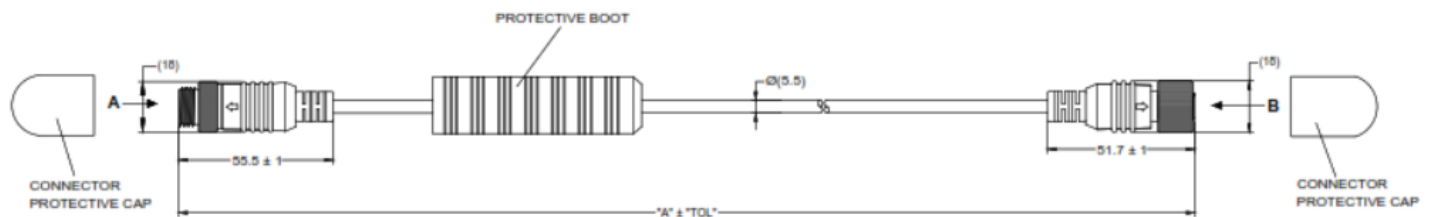

Dimensions: mm

Environmental Specifications:

- IP rating: With rubber boot fitted: IP68 and IP69K
- Operating temperature: -40°C to +105°C

Approved Standards:

- CE (REACH & RoHS)
- UKCA (REACH & RoHS)
- Elements of:
 - ISO 14572:2011,
 - ISO 6722:2011,
 - ISO 16750:2010
- WEEE

Technical Specifications:

- Cable resistance: <0.2Ω/m
- Screening resistance: <0.2Ω/m
- Maximum DC operating voltage: 60V (DC)
- Insulation breakdown: max. 2kV (AC) for 3s
- Cable length: See table
- Cores type: 26AWG
- Screening type: Overall Cable: Aluminium Foil
Video Wire: Braided Wire
- Weight: See table
- Outside insulator material: PVC
- Colour: Black
- Connection type: Brigade Elite Type Connector:
1 x 4-pin Male,
1 x 4-pin Female
- Minimum bending radius: 33mm
- Cable thickness: Ø5.5mm

Features:

- BE-HXXXX range for use with shutter & non-shutter camera variants.
- Extension cable for Brigade's high definition Elite camera range.
- Backwards compatible with Brigade's CVBS Elite camera range.

Package Contents:

- 1x BE-HXXXX - Cable

Model No.	Part No.	Weight (grams)	Length (meters)
BE-H0003	7366	50	0.3
BE-H001	7367	110	1
BE-H003	7368	140	3
BE-H005	7369	240	5
BE-H008	7370	310	8
BE-H010	7371	360	10
BE-H012	7372	450	12
BE-H015	7373	590	15
BE-H020	7374	740	20
BE-H025	7375	920	25
BE-H030	7376	1110	30