



***GALAXY***  
SPECIALISED WATERPROOFING CO. LLC.

# PRE-QUALIFICATION

**GALAXY SPECIALISED WATERPROOFING CO. L. L. C**

Permanent waterproofing solution: DCL certified Crystalline concrete admixtures and repair system

**CORMIX**  
One step ahead  
AUTHORISED DISTRIBUTOR

## Contact Details

P. O. Box: 113678, Dubai, UAE

Email: [kapil@galaxysp.net](mailto:kapil@galaxysp.net)

Alternative Contact Deatails

Mob: +971 55 8824150

# CONTENTS

<u>S.No</u>	<u>Contents</u>
<b>1</b>	<b>Company Profile: Introduction</b>
<b>2</b>	<b>Trade License &amp; Chamber Certificate</b>
<b>3</b>	<b>DCL Certificate</b>
<b>4</b>	<b>Quality &amp; HSE Policy</b>
<b>5</b>	<b>Project: Approvals &amp; Testimonials</b>
<b>6</b>	<b>Project case Studies</b>

## **INTRODUCTION**

Galaxy Specialised Waterproofing CO LLC is a fast growing company specialising in concrete waterproofing solutions for commercial and residential buildings, villas, water tanks, lift pits, swimming pools and other concrete structures. We provide professional services for waterproofing of sub-structure in fresh projects, leakage repair, complete with product warranty and service support. We are authorized distributors and applicators in the UAE for a British company CORMIX International LIMITED based in Thailand for high-quality international standard DCL certified Crystalline Integral Admixtures and repair systems.

The company has established a strong and impressive customer base in a relatively short span of time under its Managing Director Kapil Arora, a well-known waterproofing expert in the UAE. With more than 17 years of expertise in admixture technology and surface applied water proofing solutions, Kapil has led many successful projects in the region. Our highly committed team of experts has successfully plugged leaks in some of the toughest and extremely challenging cases in the UAE.

We handle all kinds of waterproofing cases giving the customer the most comprehensive solutions in the most cost-effective way. Our motto is reliability and commitment to offer tried and tested solutions that are most suited to a case. We are proficient in all kinds of leakage repair and maintenance works (supply and apply) based on Crystalline Technology and have successfully executed both government and private sector repair cases. Some of the case studies of our recent successes have been attached herewith.

We have an excellent track record with a diverse database of reputed clients and approved government sub-contractors in the UAE. DEWA is one of our long-standing clients and has been coming back to us for its waterproofing needs. We have successfully completed leakage repair works for several DEWA chambers at different locations in Dubai with more coming up in the following months.

We offer tailor-made solutions for each repair need and are also equipped to handle turnkey projects as per the requirement and specifications of each project. We are committed to providing complete peace of mind to clients and after sales support where needed.

For Galaxy Specialised Waterproofing CO LLC

Kapil Arora  
Managing Partner  
Mob: 055-8824150



## رخصة تجارية Commercial License

### تفاصيل الرخصة / License Details

License No.	697657	رقم الرخصة
Company Name	GALAXY SPECIALISED WATERPROOFING CO. L.L.C	اسم الشركة
Business Name	GALAXY SPECIALISED WATERPROOFING CO. L.L.C	الإسم التجارى
License Category	Dep. of Economic Development	فئة الرخصة
Legal Type	Limited Liability Company(LLC)	الشكل القانوني
Expiry Date	04/11/2025	تاريخ الإنتهاء
D&B D-U-N-S ® No		رقم الرخصة الام
Register No.	1124359	رقم السجل التجارى
	Issue Date	05/11/2013
	Main License No.	697657
	DCCI No.	225309

### الاطراف / License Members

Share / الحصص	Role / الصفة	Nationality / الجنسية	Name / الإسم	No./ رقم الشخص
	Manager / مدير	India / الهند	كابيل ارورا امار لال ارورا	523255
			KAPIL ARORA AMAR LAL ARORA	

### نشاط الرخصة التجارية / License Activities

تركيب المواد العازلة في الأبنية والمنشآت المدنية

### العنوان / Address

Phone No	971-4-3471189	تليفون	P.O. Box	47425	صندوق بريد
Fax No	971-4-3471189	فاكس	Parcel ID	373-1194	رقم القطعة
Mobile No	971-55-8824150	هاتف متحرك		KAPIL@GALAXYSP.NET	البريد الإلكتروني / Email
					مكتب رقم 604 - ملك محمدعقيل ابراهيم طالب عباسى - بردي - البرشاء 1

### الملاحظات / Remarks

تم اضافته وانسحاب الشركاء وتغيير المدير في تاريخ 10/02/2019

Print Date 10/10/2024 11:17 تاريخ الطباعة

Receipt No.

رقم الإيصال



الإمارات  
THE EMIRATES

يمكنك الآن تجديد رخصتك التجارية من خلال الرسائل النصية القصيرة، أرسل رقم الرخصة إلى 6969 (دو) / اتصالات) للحصول على اذن الدفع.

Now you can renew your trade license by sending a text message (SMS). Send your trade license

number to 6969 (Du / Etisalat) to receive payment voucher

Get FREE access to Zoho One for the first year  
احصل على زوهو ون مجاناً للسنة الاولى  
Zoho.com/det



وثيقة إلكترونية معتمدة وصادرة بدون توقيع من دائرة الاقتصاد والسياحة في دبي. لمراجعة صحة البيانات الواردة في الرخصة يرجى مسح رمز الاستجابة السريعة  
This is a certified e-document issued without signature by the department of Economy and Tourism .Kindly scan the QR Code to verify the certificate



# CERTIFICATE OF PRODUCT CONFORMITY

Dubai Central Laboratory Department (DCLD) of Dubai Municipality  
hereby attests that the product(s)

## Concrete Admixtures

(Details as per the attached Scope of Certification)

manufactured by:

### CORMIX INTERNATIONAL LIMITED

**Romklao 89 Road, Minburi District, Sansab Subdistrict Bangkok-10510,Thailand**

have been assessed in accordance with DCLD Document Ref. No. DM-DCLD-RD-DP21-2001 (IC) "General Rules for DM third party product certification system through factory assessment" and the relevant Specific Rules, and were found in conformity with the standard specification:

### BS EN 934-2:2009+A1:2012

Accordingly, DCLD hereby authorizes the above manufacturer  
to affix the DCL Product Conformity Mark on the above-mentioned product(s).



ENG. MAJED AL SHAMSI

Certification and Quality Control of Products Section's Manager  
Dubai Central Laboratory Department-Dubai Municipality

Certificate No: CL19020718  
Valid Until: 10/11/2025



Current Issue Date: 11/11/2024  
Original Issue Date: 11/11/2019



The attached Scope of Certification bearing the same Certificate Number forms an integral part of this Certificate.  
This Certificate is an electronic document subject to the Terms and Conditions of the Product Certification System and shall not be reproduced except in full.

## DUBAI CENTRAL LABORATORY DEPARTMENT DCLD-CQPS PRODUCT CONFORMITY CERTIFICATION SCHEME

### SCOPE OF CERTIFICATION FOR CERTIFICATE NO. CL19020718

**Certificate Issued To:** CORMIX INTERNATIONAL LIMITED  
Romklao 89 Road, Minburi District, Sansab Subdistrict, Bangkok - 10510, Thailand

**Applicable Standard Specification:** BS EN 934-2: 2009 + A1: 2012 : Admixtures for Concrete, Mortar

**Applicable Specific Rules:** DM-DCLD-RD-DP21-2195 (IC) : Certification of Concrete Admixtures as per (BS EN 934 - 2: 2009 +A1: 2012)

S/N	PRODUCT DESCRIPTION	BRAND NAME	PRODUCT DETAILS
1.	Water Resistance Concrete Admixture  (In powder form)	CORMIX H2O STOP	<p>CORMIX H2O Stop</p> <p>CORMIX H2O Stop Powder Grey Color</p> <p><b>Air Content:</b> Test mix with Cormix H2O Stop is <math>\leq 2\%</math> by volume above control mix</p> <p><b>Compressive strength @ 28 days</b> of Cormix H2O Stop is <math>\geq 85\%</math> of control mix</p> <p><b>Capillary Absorption @ 7 Days</b> of Cormix H2O Stop is <math>\leq 50\%</math> by mass of control mix – after 7 days curing</p> <p><b>Capillary Absorption @ 28 Days</b> of Cormix H2O Stop is <math>\leq 60\%</math> by mass of control mix - after 90 days curing</p> <p>Maximum chloride content is <math>\leq 0.10\%</math> by weight</p> <p>Maximum alkali content is <math>&lt; 3.0\%</math> by weight</p> <p>Silicon dioxide content is <math>&lt; 50.0\%</math> by weight</p> <p>Dry Material content is <math>&gt; 95.0\%</math> by weight</p> <p>Water soluble chloride is <math>\leq 0.10\%</math> by weight</p> <p><b>Dosage: 1% by the weight of cement</b></p>

**DUBAI CENTRAL LABORATORY DEPARTMENT  
DCLD-CQPS PRODUCT CONFORMITY CERTIFICATION SCHEME**

**SCOPE OF CERTIFICATION  
FOR CERTIFICATE NO. CL19020718**

2.	Water Resistance Concrete Admixture  (In liquid form)	CORMIX H2O STOP	<p>CORMIX H2O Stop</p> <p>CORMIX H2O Stop Translucent Colourless Liquid</p> <p><b>Air Content:</b> Test mix with Cormix H2O Stop is ≤ 2 % by volume above control mix</p> <p><b>Compressive strength @ 28 days</b> of Cormix H2O Stop is ≥ 85 % of control mix</p> <p><b>Capillary Absorption @ 7 Days</b> of Cormix H2O Stop is ≤ 50% by mass of control mix – after 7 days curing</p> <p><b>Capillary Absorption @ 28 Days</b> of Cormix H2O Stop is ≤ 60% by mass of control mix - after 90 days curing</p> <p>Ph Value: 13 – 14</p> <p>Density: 1.21 - 1.23 kg/liter</p> <p>Maximum chloride content is ≤ 0.10% by weight</p> <p>Maximum alkali Content is &lt; 15.0% by weight</p> <p>Silicon dioxide content is &lt; 1.0% by weight</p> <p>Dry Material content is &gt; 30 ± 5% by weight</p> <p>Water soluble chloride is ≤ 0.10% by weight</p> <p><b>Dosage: 1 L per 100 kg of cement</b></p>
----	--	--------------------	---

- NOTE 1: This document forms an integral part of the Certificate of Product Conformity bearing the same certificate number.
- NOTE 2: The above product shall bear the DCLD Conformity Mark.
- NOTE 3: As applicable, other properties in the product standard specification which were excluded in the specific rules as approved by the certification body authorized personnel are to be verified by the end user of the product (if needed).

Original Issue Date : 11-11-2019  
Current Issue Date : 11-11-2024  
Valid Until : 10-11-2025



**ENG. MAJED AL SHAMSI**

**CERTIFICATION AND QUALITY CONTROL OF PRODUCTS SECTION'S MANAGER**

# Quality Policy and Objectives

Quality work and on time delivery is our core focus. Thanks to our dedicated personnel we provide the best service to our customers.

- We achieve this with the highest quality materials and trained applicators.
- There are quality checks at every stage of the job.
- We also ensure mending any loose ends immediately, as per the customer's needs.
- Our regular training sessions for our team ensure our workers are equipped with the latest techniques and tools to execute the job more efficiently and effectively.
- We build long-term bonds with our customers by investing in trained staff and top quality tools to deliver utmost satisfaction to the client







# HSE Policy



Galaxy Specialised Watrerproofing ensures worker safety and happiness. Our staff makes the core of our company and we ensure they are treated well. We are also mindful of our responsibility towards the environment, and adequately manage risks to support sustainable growth.

- All of our material is safe and environmental friendly certified by the best and most reputed labs.
- Safety on site is a key concern and we leave no stone unturned to ensure all of our staff work in a hazard free, safe environment.
- We strictly adhere to the rules set by Dubai Municipality to ensure complete safety to our workers and train them to follow strict safety guidelines.
- We work together to ensure the sites are accident free and provide happy and healthy enviroment to the workers to give their best service.

















<b>Client</b>	<b>Consultant</b>	<b>Main Contractor</b>			
<b>PREQUALIFICATION SUBMITTAL</b>					
PROJECT : PROPOSED RESIDENTIAL BUILDING (G+P+10+ROOF) PNO & LOCATION : DG-CTLZ-001 AT AL JABAL ALI FIRST DUBAI CLIENT : M/S . MASHRIQ ICON HOLDINGS LIMITED CONSULTANT : EMSQUARE ENGINEERING CONSULTANTS					
No: CJ/173/PQ/CVL/13 Rev/0 Date: 02/05/2025					
WE ARE SUBMITTING HERewith DOCUMENTS FOR REVIEW & APPROVAL					
Technical Submission	Architecture <input type="checkbox"/>	Structure <input type="checkbox"/>	Electrical (HV / LV) <input type="checkbox"/>	Plumbing & Drainage <input type="checkbox"/>	
	HVAC <input type="checkbox"/>	FF. FA & EL <input type="checkbox"/>	Specialist Works <input type="checkbox"/>	Specialist Works <input type="checkbox"/>	
Drawing Ref: BOQ & Specs Ref: Prequalification Description: Supplier of Waterproofing Admixture in Substructure Concrete (Material - Cormix H20 Waterstop) Prequalification Details: Galaxy Specialised Waterproofing Co L.L.C Enclosures: Attached					
Submitted By: Main Contractor:		Conformity By: MEP Contractor:	Conformity By: Specialist Contractor:	Received By: Consultant:	
<b>CONSULTANT COMMENTS:</b> ① <del>Submit</del> M/S Galaxy Specialized Water Proofing Co., L.L.C NO OBJECTION. ② Submit material Submittal for Consultant Review / Approval ③ Arrange Trial Mix and Third Party Trial Mix Report to be done.					
<b>CLIENT COMMENTS:</b>					
Consultant Recommendation	Approved	Approved With Comments	Revise & Re-Submit	Rejected	For Discussion
Client Recommendation	Approved	Approved With Comments	Revise & Re-Submit	Rejected	For Discussion
Corrections or comments made relative to submittals during this review does not relieve the contractor from compliance with the requirements of the drawings, specifications & authority norms & regulations. This check is only for review of general conformance with the design concept of the project and general compliance with the information given in the contract documents. The contractor is responsible for confirming and correlating all design details & specifications, authority norms & regulations, method statement, shop-drawings & design approvals, manufacturer recommendations, fabrication process and techniques of construction along with coordinating work with other trades, and executing the works in a safe and satisfactory manner.					
<b>FOR EMSQUARE ENGINEERING CONSULTANT</b>			<b>FOR (Client *****)</b>		
QC ENGINEER - CIVIL Sign & Date:		QC ENGINEER - MEP Sign & Date:		PROJECT ENGINEER - CIVIL Sign & Date:	
RESIDENT ENGINEER - CIVIL Sign & Date:		RESIDENT ENGINEER - MEP Sign & Date:		PROJECT MANAGER - CIVIL Sign & Date:	
Additional Comments / Information:					

									
Client		Consultant		Main Contractor					
<b>DOCUMENT SUBMITTAL</b>									
PROJECT :	PROPOSED RESIDENTIAL BUILDING (G+P+10+ROOF)				No: C/173/CVL/DS/08 Rev 0				
PNO & LOCATION :	DG-CTLZ-001 AT JABAL ALI FIRST DUBAI				Date: 26/03/2025				
CLIENT :	M/S. MASHRIQ ICON HOLDINGS LIMITED								
CONSULTANT :	EMSQUARE ENGINEERING CONSULTANTS								
WE ARE SUBMITTING HERewith DOCUMENTS FOR REVIEW & APPROVAL									
Technical Submission	Architecture	<input type="checkbox"/>	Structure	<input checked="" type="checkbox"/>	Electrical (HV / LV)	<input type="checkbox"/>	Plumbing & Drainage	<input type="checkbox"/>	
	HVAC	<input type="checkbox"/>	FF, FA & EL	<input type="checkbox"/>	Specialist Works	<input type="checkbox"/>	Specialist Works	<input type="checkbox"/>	
Drawing Ref: NIL									
BOQ & Specs Ref: NIL									
Document Description: <b>Readymix Concrete Mix Design</b>									
C20/20 (64%OPC+36%GGBS) BLINDING C20/10 (64%OPC+36%GGBS) SCREED C50/20 (35%OPC+60%GGBS+5%MS) SUB STRUCTURE C50/20 (35%OPC+60%GGBS+5%MS+WP240) SUB STRUCTURE (WATER TANK, PUMP ROOM) C50/20 (64%OPC+36%GGBS) SUPER STRUCTURE (SLAB, BEAM) C60/20 (60%OPC+35%GGBS+5%MS) SUPER STRUCTURE (COLUMN, WALL)									
Document Details: QUICK MIX BETON READY MIX MANUFACTURING L.L.C									
Enclosures: ATTACHED MIX DESIGN FROM QUICK MIX BETON READY MIX MANUFACTURING LLC									
Submitted By: Main Contractor:				Conformity By: MEP Contractor:		Conformity By: Specialist Contractor:		Received By: Consultant	
<b>CONSULTANT COMMENTS:</b>									
<p>① Ready Mix Concrete Mix Design Shall proceed for TRIAL Mix</p> <p>as per Approved mix design for Approved drawings. and arrange and inform date &amp; time of Trial mix</p>									
<b>CLIENT COMMENTS:</b>									
Consultant Recommendation		Approved	Approved With Comments	Revise & Re-Submit	Rejected	For Discussion			
Client Recommendation		Approved	Approved With Comments	Revise & Re-Submit	Rejected	For Discussion			
Corrections or comments made relative to submittals during this review does not relieve the contractor from compliance with the requirements of the drawings, specifications & authority norms & regulations. This check is only for review of general conformance with the design concept of the project and general compliance with the information given in the contract documents. The contractor is responsible for confirming and correlating all design details & specifications, authority norms & regulations, method statement, shop-drawings & design approvals, manufacturer recommendations, fabrication process and techniques of construction along with coordinating work with other trades, and executing the works in a safe and satisfactory manner.									
<b>FOR EMSQUARE ENGINEERING CONSULTANT</b>				<b>FOR (Client *****)</b>					
QC ENGINEER - CIVIL Sign & Date:		QC ENGINEER - MEP Sign & Date:		PROJECT ENGINEER - MEP Sign & Date:		PROJECT ENGINEER - CIVIL Sign & Date:			
RESIDENT ENGINEER - CIVIL Sign & Date:		RESIDENT ENGINEER - MEP Sign & Date:		PROJECT MANAGER - MEP Sign & Date:		PROJECT MANAGER - CIVIL Sign & Date:			
Additional Comments / Information:									



 <p> <b>انوفيتيف للاستشارات</b>  <b>استشاريون في العمارة والهندسة</b>  <b>INNOVATIVE CONSULTANTS</b>  <b>CONSULTING ARCHITECTS &amp; ENGINEERS</b>  <small>Tel : +974 2539179 • E mail: <a href="mailto:ecor@innovative.ae">ecor@innovative.ae</a> • PO BOX 7835</small> </p>	<p> <b>"PROPOSED COMMERCIAL &amp; RESIDENTIAL BUILDING (G+2P+14TYP+R)"</b>  <b>For: MR. ALI ABDULLA MOHAMMAD AL SHIRAWI</b>  <b>Plot No.: (326-1501), Al Jadaf, Dubai, U.A.E."</b> </p>	 <p> <b>الجناب المهندس المعمار محمد</b>  <b>OLDEN WING</b>  <b>CONTRACTING LLC</b> </p>								
<b>DOCUMENTS APPROVAL SUBMITTAL</b>		<b>IC-2024-02-DS-07</b>								
<b>To: M/s. INNOVATIVE Consultants:</b> Please find attached the following Material Submittal for your approval/comments:										
<table style="width: 100%;"> <tr> <td style="width: 15%;"><b>Discipline:</b></td> <td style="width: 35%;"> <input checked="" type="checkbox"/> Civil/Structural           </td> <td style="width: 35%;"> <input type="checkbox"/> Architectural           </td> <td style="width: 15%;"> <input type="checkbox"/> Electrical           </td> </tr> <tr> <td></td> <td> <input type="checkbox"/> Mechanical           </td> <td> <input type="checkbox"/> Plumbing           </td> <td> <input type="checkbox"/> Others           </td> </tr> </table>			<b>Discipline:</b>	<input checked="" type="checkbox"/> Civil/Structural	<input type="checkbox"/> Architectural	<input type="checkbox"/> Electrical		<input type="checkbox"/> Mechanical	<input type="checkbox"/> Plumbing	<input type="checkbox"/> Others
<b>Discipline:</b>	<input checked="" type="checkbox"/> Civil/Structural	<input type="checkbox"/> Architectural	<input type="checkbox"/> Electrical							
	<input type="checkbox"/> Mechanical	<input type="checkbox"/> Plumbing	<input type="checkbox"/> Others							
<b>Material Details:</b>		<b>List of Enclosures:</b>								
Item Description	Method of Statement for Cormix H2O Stop Liquid Admixture System	<input type="checkbox"/> Vendor's Technical Literature								
Specs Reference		<input type="checkbox"/> Compliance Statement								
BOQ Reference		<input type="checkbox"/> Comparison Sheets								
Drg. Reference		<input type="checkbox"/> Previous Test Results								
Material Specified		<input type="checkbox"/> Copy of the Related Specs & Other Contract Documents								
Material Proposed		<input checked="" type="checkbox"/> Sample Board								
Sub Contractor	Galaxy Specialised Waterproofing Co. LLC. P.O Box 47425, Tel NO. 3474711, Dubai. U.A.E.	<input type="checkbox"/> List of Projects Done								
		<input checked="" type="checkbox"/> Others (Material Submittal)								
										
<b>Submitted by: Eng. Mohd. Irfan</b>		<b>Signature:</b> 								
		<b>Date: 27.01.2025</b>								
<b>INNOVATIVE CONSULTANTS COMMENTS:</b>										
<input type="checkbox"/> Approved <input checked="" type="checkbox"/> Approved with Comments <input type="checkbox"/> Not Approved, Resubmit										
<b>Comments:</b>										
<ul style="list-style-type: none"> <li>• No Objection for the method statement subject to satisfactory performance at site</li> <li>• Main Contractor and M/s Galaxy to coordinate each step to ensure compliance with the method statement.</li> <li>• Main Contractor to ensure obtaining clearance from M/s Galaxy prior to concrete of any substructure element.</li> </ul>										
<b>Checked by:</b> 	<b>Signature:</b> 	<b>Date:</b> 30/01/2025								
<b>Confirmed by:</b>	<b>Signature:</b>	<b>Date:</b>								
<b>Note:</b> INNOVATIVE Comments shall not be considered as a reason of claim of any type unless it is issued via E.I. The contractor should seek an E.I. if he considers that INNOVATIVE comments contain financial or time impact.										
• Main Contractor to ensure documenting each step with photos stamped with date and time and raised inspection for Engineer approval of every step.										



 <p>انوفيتيف للاستشارات استشاريون في العمارة والهندسة <b>INNOVATIVE CONSULTANTS</b> CONSULTING ARCHITECTS &amp; ENGINEERS Tel : 9714 2502173 / E-mail : iccon@iccon.ae / PO BOX 7855</p>	<p><b>"PROPOSED COMMERCIAL &amp; RESIDENTIAL BUILDING (G+2P+14TYP+R)</b> <b>For: MR. ALI ABDULLA MOHAMMAD AL SHIRAWI</b> <b>Plot No.: (326-1500), Al Jadaf, Dubai, U.A.E."</b></p>	 <p>الذراع الخفيف للمقاولات ش.م.م. <b>GOLDEN WING</b> CONTRACTING LLC</p>
<b>DOCUMENTS APPROVAL SUBMITTAL</b> <span style="float: right;"><b>IC-2024-01-MS- 23</b></span>		
<p><b>To: M/s. INNOVATIVE Consultants:</b></p> <p>Please find attached the following Material Submittal for your approval/comments:</p>		
<p><b>Discipline:</b>    <input checked="" type="checkbox"/> Civil/Structural    <input type="checkbox"/> Architectural    <input type="checkbox"/> Electrical                                 <input type="checkbox"/> Mechanical    <input type="checkbox"/> Plumbing    <input type="checkbox"/> Others</p>		
<b>Material Details:</b>		<b>List of Enclosures:</b>
Item Description	Cormix H2O Stop Liquid Admixture System	<input type="checkbox"/> Vendor's Technical Literature
Specs Reference		<input type="checkbox"/> Compliance Statement
BOQ Reference		<input type="checkbox"/> Comparison Sheets
Drg. Reference		<input type="checkbox"/> Previous Test Results
Material Specified		<input type="checkbox"/> Copy of the Related Specs & Other Contract Documents
Material Proposed	Cormix H2O Stop Liquid Admixture System	<input type="checkbox"/> Sample Board
Sub Contractor	Galaxy Specialised Waterproofing Co. LLC. P.O Box 47425, Tel No. 04-3474711, Dubai, U.A.E	<input type="checkbox"/> List of Projects Done
		<input checked="" type="checkbox"/> Others (Method of Statement)
		
<p><b>Submitted by: Eng. Mohd. Irfan</b>      <b>Signature:</b>       <b>Date: 24.01.2025</b></p>		
<p><b>INNOVATIVE CONSULTANTS COMMENTS:</b></p> <p><input type="checkbox"/> Approved  <input checked="" type="checkbox"/> Approved with Comments  <input type="checkbox"/> Not Approved, Resubmit</p>		
<p><b>Comments:</b></p> <p>• Trial Mix to be carried on for Cormix H2O stop admixture and cube results for compressive strength and durability to be submitted for Engineer approval prior to proceed with using the admixture.</p> <p>• Coremix H2O stop admixture must be mentioned in the concrete delivery note. If not mentioned, truck will be rejected.</p>		
<p><b>Checked by:</b>       <b>Signature:</b>       <b>Date: 24/01/25</b></p>		
<p><b>Confirmed by:</b> .....      <b>Signature:</b> .....      <b>Date:</b> .....</p>		
<p><small><b>Note:</b>          INNOVATIVE Comments shall not be considered as a reason of claim of any type unless it is issued via E.I.          The contractor should seek an E.I. if he considers that INNOVATIVE comments contain financial or time impact.</small></p>		

Received  
25-01-25

- Subject to satisfactory performance at site.
- Follow manufacture recommendations for usage, dosage, storage etc.



Ref. #: ECO-069/ENAWT 2/LTR-3DCont/2025-08

Date: 23<sup>th</sup> January 2025

**To : M/S 3D CONSTRUCTION L.L.C**

Tel No. 04-2990922

Email Address: [3dconstructionllc@gmail.com](mailto:3dconstructionllc@gmail.com)

**PROJECT : ENAWT TOWER-2 (Comm. & Res. Bldg G.+4P. +18F. +R.)  
On Plot No. 6817732 (DM) / JVC17TCP001A (Nakheel)  
at Al Barsha South 4th-Dubai – U.A.E**

**CLIENT : M/s. ENAWT REAL ESTATE DEVELOPMENT LLC**

**SUBJECT : Foundation water proofing ( CORMIXH2O STOP)**

Dear Sir,

With Reference to above mentioned project, subject and please be informed that your proposal is approved from client and consultant subject to the following :

- 1- Water tank Dosages of Galaxy product **CORMIXH2O** not less than 6kg/m<sup>3</sup> with 2 layer thickness 4mm membrane and protection board one layer thickness 3mm for vertical and 50mm screed for horizontal from external and GRP liner coated 6mm from inside.
- 2- Piles caps and strip beams Dosages of Galaxy product **CORMIXH2O** not less than 5kg/m<sup>3</sup> with rubberized bitumen 2coat.
- 3- 25 years warranty certificate from Date of handing over project.
- 4- Dosages of cormix H2O stop to be submitting with concrete mix Design for approval.
- 5- Only Galaxy specialised waterproofing CO. L.L.C. to supervise and carry out of admixture Dosage during the pouring concrete.
- 6- Full responsibility of main contractor and sub contractor to comply with project specification and Authorities requirement.
- 7- Details and shop drawing to be submitted to consultant for final approval.

This is for your information and necessary action.

Sincerely yours,

**ECO ENGINEERS CONSULTANTS OFFICE**

**Engr. Garelnabi Rashed**  
CEO





**MALABAR**  
GOLD & DIAMONDS



**PROJECT NO. P745**

**PROJECT DETAILS : B+G+2 Residential Villa on Plot 6181340 at Nadd Al Shiba First**

**MATERIAL SUBMITTAL**

Date submittal prepared:	21.01.2025	Submittal Ref:	AZT-P1234-MS-C-0025	Rev. No. 005
Material description :	CONCRETE MIX DESIGN	Vendor List	Yes <input type="checkbox"/> No <input type="checkbox"/>	
Specs. / BOQ / Drwg. Reference		Reason for Alternative		
Sub-Contractor:		Type of material	<input type="checkbox"/> Arch/ID <input type="checkbox"/> Str <input type="checkbox"/> MEP	
Address:				
Material description:	CONCRETE MIX DESIGN	Catalogue Ref:		
Manufacturer:	AL AZZANI READY MIX LLC	Supplier:	AL AZZANI READY MIX LLC	
Brand:				
Address:		Address:		
Area of usage :		Production period:	Weeks	
Spec. Ref:		Delivery Ex-works:	Weeks	
BOQ Ref:		Total Delivery time:	Weeks	
Date Material required at site as per BL:		Expected date of delivery to site:		
Delivery method:				
Overland	Sea Freight	<input type="checkbox"/> Air Freight	<input type="checkbox"/> Other	

Contractor's comments:

If alternate Material submitted, attach full comparison to that specified.

Attachments/Enclosures:

- ☐ Catalogues  
☒ Vendor's Technical Literature  
☐ Drawings  
☒ Compliance Statement  
☐ Samples  
☒ Previous Test Results  
☐ Other ( please specify )  
☒ Copy of the Related Specs.

Contractor's Authorized Signature:

Date: 21.01.2025

Engineer's Comments:

Product Discussed with:

1. For foundation, Cement containing at least 3.5% C3A but not more than 9% C3A is recommended as per soil report.
2. Final approval is subject to the satisfactory test reports for trail mix.
3. Durability of concrete shall be ensured as per project specification by taking samples from site.
4. No objection for the Concrete Mix Design subject to the compliance with DDA stamped drawings and project specification.
5. DCL certification of batching plant, trucks and other certification shall be valid during the concreting. Main Contractor to verify the same before placing order.

- ☐ Manufacturer  
☐ Authorized Distributor  
☐ Supplier  
☐ Trade Licence  
☐ Manufacturer's letter of supplier  
☐ Manufacturer's product distribution authorization  
☐ letter of application

**Site Team**

Status			
<input type="checkbox"/> Approved	<input checked="" type="checkbox"/> Approved with comments	<input type="checkbox"/> Not approved. Revise & submit	<input type="checkbox"/> Rejected as comments
Project Manager:	Midhun	Engineer:	
Date:	23-Jan-2025	Date:	

**Design Team (To be reviewed by the designers associated with the material)**

Status

- ☐ Sample received & checked  
☐ Technical data sheet reviewed  
☐ Approved  
☐ Approved with comments  
☐ Not approved. Revise & submit  
☐ Rejected as comments

Architect:	Structural Engineer:	Mechanical Engineer:	Electrical Engineer:
Date:	Date:	Date:	Date:

**QA/QC**

Status

- ☐ Approved  
☐ Approved with comments  
☐ Not approved. Revise & submit  
☐ Rejected as comments

QA/QC Engineer:

Date:





Eng. Adnan Saffarini Office  
Architects & Engineering Consultants

Page 1 of 1

Doc Ref.: EAS-MST

Form sheet Title:

Material Submittal Transmittal

TS No.

EAS-DEE-MST-CIV-0032

Rev.

00

Date

Thursday, 16 January 2025



New Submittal



Re-Submittal

Project Title

RASHID & LATIFA SCHOOL-GIRL'S

Client

M/s. Engineering Office

Plot No.

Consultant

M/s Eng. Adnan Saffarini Office (EAS)

Contractor

DARWISH ENGINEERING EMIRATES

Sub-contractor

M/s Tremix

Building / Area

Trade

### Subject of Submittal

Material submittal for Ready-mix Concrete for Water tank (Concrete with crystalline waterproof admixture)

### Attachments

☐ Pre-Qualification of Subcontractor

☐ Method Statements

☐ Guarantee

☐ Test Results

☐ Certificate

☒ Others

### Requested By Contractor

Name: Eng. Esam Radwan - Project Manager (DEE)

Signature: \_\_\_\_\_

Date: / /

Time: :

### Received by Consultant

Name: Eng. Ehab Yasin - Resident Engineer (EAS)

Signature: \_\_\_\_\_

Date: 16/1 / 25

Time: 3: pm

### Consultant's Comments (Project Manager / Resident Engineer)

Propose a product that in definition is "hydrophilic" and attach a letter from supplier with recommended dosage for This project. (This is for waterproof admix), and for inhibitors, its approved.


### Approval Status

☐ Approved

☐ Approved As noted

☒ Re-Submit As noted

☐ Rejected



Name of Consultant's Representative: Eng. Ehab Yasin - Resident Engineer (EAS)

Signature: \_\_\_\_\_

Date: / /

Time: :

### NOTE:

- For Re-Submittal, copy of previous commented submittal should be attached.
- Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the contract requirement and specifications. This check is only for review of general conformance with the design concept of the project and general compliance with the information given in the contract documents.



## MATERIAL APPROVAL SUBMITTAL

IC-2024-03-MA- 20

To: M/s. INNOVATIVE Consultants:

Please find attached the following Material Submittal for your approval/comments:

**Discipline:** ☒ Civil/Structural ☐ Architectural ☐ Electrical  
☐ Mechanical ☐ Plumbing ☐ Others

### Material Details:

### List of Enclosures:

Item Description	Waterproofing Work	<input type="checkbox"/> Vendor's Technical Literature
Specs Reference		<input type="checkbox"/> Compliance Statement
BOQ Reference		<input type="checkbox"/> Comparison Sheets
Drg. Reference		<input type="checkbox"/> Previous Test Results
Material Specified		<input type="checkbox"/> Copy of the Related Specs & Other Contract Documents
Material Proposed	Waterproofing Work - Cormix H2O Stop Liquid Admixture System	<input type="checkbox"/> Samples
Manufacturer/ Local Supplier	galaxy Specialised Waterproofing Co. LLC ,P.O Box 47425, Dhahi U.A.E, Tel NO. 04-3474711	<input type="checkbox"/> List of Projects Done
		<input type="checkbox"/> Others

Submitted by: Eng. Danish Parwez

Signature: 

Date: 18.09.2024

### INNOVATIVE CONSULTANTS COMMENTS:

- ☐ Approved  
☒ Approved with Comments  
☐ Not Approved, Resubmit

### Comments:

Trial mix to be carried on for Cormix H2O stop admixture and cube results for compressive strength and durability to be submitted for Engineer approval prior to proceed with using the admixture.  
 • Cormix H2O stop admixture must be mentioned in the concrete delivery note. IF not mentioned, truck will be rejected.

Checked by: 

Signature: 

Date: 23/09/2024

Confirmed by: .....

Signature: .....

Date: .....

### Note:

INNOVATIVE Comments shall not be considered as a reason of claim of any type unless it is issued via E.I.  
 The contractor should seek an E.I. if he considers that INNOVATIVE comments contain financial or time impact.

- Subject to Satisfactory Performance at site.
- Follow manufacture recommendations for usage, dosage, storage etc.



Employer 	Consultant 	Contractor 
---	---	---

## DOCUMENTS APPROVAL REQUEST

No. AXM-DEC-MBC-DAR-005 Rev:01

Date: 06/Sep/24

### Project Information:

Project: 2B+G+5+R COMMERCIAL-RESIDENTIAL BUILDING, Dubai - UAE

Employer: M/ s. AXIOM INVESTMENT LIMITED

Consultant: M/s. Datum Engineering Consultants

Contractor: M/s. Modern Building Contracting L.L.C.

### 1-Subject & Description : PRE-QUALIFICATION FOR GALAXY SPECIALISED WATERPROOFING LLC.

### 2- Type of Submittal :

☒ Prequalification
 ☐ Calculation
 ☐ Method statement
 ☐ Schedule
 ☐ Quotation
 ☐ Other

### 3- Submittal Details:

1. PRE-QUALIFICATION FOR GALAXY SPECIALISED WATERPROOFING LLC. (FOR SUB STRUCTURE WORKS)

2. \_\_\_\_\_
3. \_\_\_\_\_
4. \_\_\_\_\_
5. \_\_\_\_\_
6. \_\_\_\_\_
7. \_\_\_\_\_

We certify that the above submitted items have been reviewed in detail and are correct and in strict conformity with the contract drawings and specifications except as otherwise stated; also that the material sources indicated above have been reviewed in detail and that they will supply the submitted items in conformity with the above and deliver same timely.

Contractor:

Received by Consultant:

Date:

Date:

### 4-Consultant's Response

-approved subject to providing the following within (3) days :

(1) Draft Guarantee letter by :  
a) Manufacture b) applicator c) main contractor

2) provide a detailed supervision plan, testing & monitoring and inspection methodology to ensure quality effectiveness of system.

3) site visits to completed projects using same specs for at least (5) years.

☐ Approved
 ☒ Approved as noted
 ☐ Resubmit as noted
 ☐ Rejected

Consultant:

Received by Contractor:

Date:

Date:

Approval shall not relieve Contractor of any of his obligations under the Contract or constitute authorization of any change to Contract Documents or variation to the works. Contractor is responsible for dimensions, quantities and coordination with other trades.

<b>Project Title</b>	: Residence Villa, B+G+1+R	<b>Ref. No.:</b> PJ185/PJR36/TS/018	<b>Rev.:</b> 00
<b>Project Location</b>	: Villa R36, Al Thanyah Fourth, Emirates Hills	<b>Date of Issue</b>	: 04/09/2024
<b>Consultant</b>	: Creative Line Engineering Consultants	<b>Project Manager:</b>	Ahmad Ali
<b>Main Contractor</b>	: Elemech Interiors & Contracting	<b>Sub-contractor</b>	: N/A
<b>Specification Reference:</b>	N/A	<b>Discipline</b>	: As described below


<b>Discipline:</b>	<b>Architectural</b> <input checked="" type="checkbox"/>	<b>Civil / Structural</b> <input checked="" type="checkbox"/>	<b>MEP</b> <input type="checkbox"/>	<b>Others</b> <input type="checkbox"/>
--------------------	--	---	-------------------------------------	--

<b>Subject of Submittal:</b>	<b>PQ for Waterproofing Supplier for Substructure Waterproofing (Supplier –Galaxy Specialized Waterproofing Co. LLC. )</b>
------------------------------	--

<b>Enclosure:</b>	<input type="checkbox"/> <b>Pre-Qualification of Subcontractor</b>	<input type="checkbox"/> <b>Method Statement</b>	<input type="checkbox"/> <b>Guarantee</b>	<input type="checkbox"/> <b>Certificate</b>
	<input type="checkbox"/> <b>Project Quality Plan / Procedure</b>	<input type="checkbox"/> <b>Calculation Notes</b>	<input type="checkbox"/> <b>Test Results</b>	<input type="checkbox"/> <b>Others</b>

Item No.	Item Description	No. of Copies	Remarks
1	Pre-Qualification for Waterproofing Supplier for Substructure	1	

<b>Contractor Authorized Signature:</b>		<b>Date:</b> 04/09/2024
---	---	-------------------------


<b>Consultant Comments:</b>	<b>Approval Status:</b>
1-NO OBJECTION TO PROCEED WITH GALAXY SUBJECTED TO -PROVIDE METHOD OF STATEMENT	<input type="checkbox"/> <b>A- Approved</b> Work May Proceed
2-DOCUMENTS SENT BY THE CONTRACTOR FOR PQ UNDER HIS RESPONSIBILITY	<input checked="" type="checkbox"/> <b>B- Approved as noted</b> Work May Proceed subject to incorporation of comments indicated
	<input type="checkbox"/> <b>C- Reject &amp; Resubmit</b> Revise and Resubmit Work may not Proceed
<b>Consultant Authorized - Name /Signature:</b>	
	<b>Date:</b> 4-9-2024

<b>Client's No Objection Required: (Yes / No)(*)</b>	
<b>Clients Comments:</b>	<b>Review Status:</b>
	<input type="checkbox"/> <b>No Objection</b>
	<input type="checkbox"/> <b>Accepted with comments</b>
	<input type="checkbox"/> <b>Not Accepted</b>
<b>Client Authorized Signature:</b>	<b>Date:</b>

(\*) Note:

The above client's review and comments do not in any way absolve the contractor's responsibility of fulfilling the contractual obligation and consultant's responsibility of fulfilling the design & supervision liability requirements.




Reference No.:	014	Date:	20/08/2024
Project Description :	Residential Townhouse – 15 Nos Villa (B+G+2+R)		
Client's Name :	Westar Properties LLC		
Plot No.	JVC14OFRP004		
Location :	Jumeirah Village Circle, Dubai, U.A.E		
Consultant :	Ridge Engineering Consultants		
Contractor :	Golden Wing Contracting LLC		
FROM:	TO:		
Description of Material:			
Mix Design for Sub Structure Raft Slab & Isolated Footings With WP Admixture			<input type="checkbox"/> As per Specification <input type="checkbox"/> Alternative
Attachments:		Discipline:	
<input type="checkbox"/> Samples	<input type="checkbox"/> Original Brochure	<input type="checkbox"/> Civil / Structural	<input type="checkbox"/> Mechanical <input type="checkbox"/> ELV / IT
<input type="checkbox"/> Drawings / Sketches	<input type="checkbox"/> Specification	<input type="checkbox"/> Architectural	<input type="checkbox"/> SAS <input type="checkbox"/> Electrical
<input type="checkbox"/> Others:	<input type="checkbox"/> Others:		
References:			
Drawing Ref. No.:			
Specification No.:			
BOQ Ref. No.:			
International Standards:			
<p><b>Note:</b> Attach all relevant technical literature marked to identify relevant descriptions, current test certificate, samples, etc.          Attach a certificate stating compliance with Contract requirements.          Highlight any element of contractual non-compliance in this submittal.</p>			
Manufacturer / Supplier			
Company Name:	Al Azzani Ready Mix LLC	Locally Manufactured:	
Country of Origin:		AGCC Manufactured:	
Authorized Local Agent:	Al Azzani Ready Mix LLC	Production Period:	
Total Delivery Time:	(No. of Days)	Delivery Ex-Works:	
Date Required on Site:		Expected Date of Delivery on Site:	
CONTRACTOR'S REPRESENTATIVE			
Name:	Eng. Mohd. Irfan	Signature:	Date: 20.08.2024
Engineer Comment:			
No objection to proceed subject to the following conditions to be considered: ② other mix design to be submitted.			
Signed by:		Engineer's Representative	
CODE:	<input type="checkbox"/> 1 – Work may proceed. <input checked="" type="checkbox"/> 2 – Work may proceed subject to incorporation of comments indicated. <input type="checkbox"/> 3 – Revise & resubmit. Work may not proceed. <input type="checkbox"/> 4 – Review not required. Work may proceed.		Acknowledgment Receipt
Owner's Comments :			
Approval Status			
<input type="checkbox"/> – Approved <input type="checkbox"/> – Not Approved			
CC:	Owner		





	The Engineer <b>MONARCH DESIGNS ENGINEERING CONSULTANT</b>		The Contractor <b>AL ISHRAK CONTRACTING CO. LLC</b>
	<b>Project:</b> B+G+4+R Villa on Plot No. JVT04KMRA008, JVT, Dubai - UAE for Mr. Aamir Shafi Akram		

<b>From:</b> Al Ishrak Cont. Co. LLC	<b>To:</b> Monarch Consultant
--------------------------------------	-------------------------------

<h2 style="text-align: center;">Material Submittal</h2>		<b>Ref. No. :</b> MS / 224 /MS/01- Rev.00
		<b>Date :</b> 14/08/2024
<b>Originator of Submittal :</b>		<b>Required By :</b> 15/08/2024
<b>Material Division / Section :</b>	<b>Civil</b>	<b>List of Enclosures</b> (Tick the related Box) <div style="margin-top: 10px;"> <input checked="" type="checkbox"/> Vendor's Technical Literature  <input type="checkbox"/> Compliance Statement  <input type="checkbox"/> Test Results  <input type="checkbox"/> Copy of Related Specs.  <input type="checkbox"/> Samples  <input type="checkbox"/> List of Previous Projects done  <input type="checkbox"/> Others (Specify) </div>
<b>Specs./BOQ/Drg. Ref. :</b>		
<b>Material Specified :</b>	<b>Crystalline waterproofing admixture supply</b>	
<b>Material Proposed :</b>	<b>Cormix H2O Stop Liquid</b>	
<b>Manufacturer / Local Supplier :</b>	<b>Galaxy Specialised Waterproofing Co . LLC</b>	
<b>Reason for Alternative :</b>	<b>N/A</b>	
<b>Description :</b> <b>Material Submittal for the Crystalline waterproofing admixture supply</b>		
<b>Contractor's PM : Engr. Ebrahim</b> Signature & Date :14/08/2024 <div style="text-align: center;">  </div>		<b>Received By Consult :</b> Signature & Date

**Contractor's Statement :** We certify that the material(s) submitted herewith has/have been reviewed in detail and in compliance with the Contract drawings and specifications except as otherwise stated here above.

<b>Review Status</b>		
<input type="checkbox"/> A. Approved	<input checked="" type="checkbox"/> B. Approved As Noted	<input type="checkbox"/> C. Approved As Noted, Resubmit
<input type="checkbox"/> D. Not Approved, Resubmit	<input type="checkbox"/> E. Returned Unchecked	<input type="checkbox"/> F. Incomplete, Resubmit

<b>Engineer's Representative Comments:</b> Follow manufacturer recommendation of Cormix H2O Stop for : storage , Dosing in silo and pouring at site.
---

<b>Engineer's Representative :</b> Signature & Date 19-08-2024 <div style="text-align: center;">  </div>	<b>Received By Contractor :</b> Signature & Date
---	---

The Engineer's Representative review, comments and approval to the submitted material is for general conformance with the design concept and specifications and shall not relieve the Contractor from responsibility for any deviations from, or errors or omissions in respect of the requirements of the Contract Documents, unless the Contractor has informed the Engineer in writing of specific deviations and the Engineer has given written approval thereto.

<b>بن غاطي</b> <b>BINGHATTI</b>	<h2 style="margin: 0;">Materials Submittal Form</h2>	<b>SILVER STONE</b> <small>ENGINEERING CONSULTANTS</small>	
------------------------------------	--	---	--

Project Name:	Binghatti HeadQuarters		
Project Proposed:	4B + G + M + 3F + RF	Client:	BINGHATTI Developers
Project Location:	Sheikh Zayed Rd - Al Manara - Dubai	Engineering Consultant:	Silverstone Eng'g Consultants
Project Plot No.:	3630827	Main Contractor:	Granada Europe Const. Co.

MSF Reference No.:	SS-MSF-B.HQ-STR-019	MSF Date:	08-08-2024	MSF Rev.:	00
--------------------	---------------------	-----------	------------	-----------	----

Engineering Consultant has fourteen (14) working days to respond after the document has been submitted.

MSF SCOPE OF WORK				
<input type="checkbox"/> ARCH	<input checked="" type="checkbox"/> STR	<input type="checkbox"/> MEP	<input type="checkbox"/> ID/ED	<input type="checkbox"/> AI

MSF SUBMITTALS INFORMATION:				
SPECS. Ref. No.	Description	Pages	Discipline	Remarks
	Material Date sheet for waterproofing admixture by crystallization - Cormix H <sub>2</sub> OStop Crystallized	2	Structure	

MAIN CONTRACTOR CONFIRMATION					
<input type="checkbox"/> Joinery/ Aluminum Head		<input type="checkbox"/> MEP Head		<input checked="" type="checkbox"/> Project Manager	
				Mohamed Rashed	
Signature:	Date:	Signature:	Date:	Signature:	Date:08-08-2024

The Contractor strictly confirms herewith that the MSF has been studied carefully & coordinated precisely as per the approval of all drawings from the authorities and approved specifications from the engineering consultant, enclosed with contractor comments (if required).






MSF ATTACHEMENT			
<input checked="" type="checkbox"/> Drawings	<input type="checkbox"/> Catalogues	<input type="checkbox"/> Samples	<input checked="" type="checkbox"/> Other: .....

QA/QC ENGINEERS COMMENTS AND ACKNOWLEDGMENT	
<input checked="" type="checkbox"/> CIVIL	<input type="checkbox"/> MEP

ENGINEERING COSULTANT COMMENTS AND APPROVAL STATUS									
<input type="checkbox"/> Approved (A)			<input checked="" type="checkbox"/> Approved as Noted (B)				<input type="checkbox"/> Re- Submit (C)		
<p>- No objection on the proposed material subject to full compliance with the manufacturer recomendations for application.</p> <p>- The dosage of material to be as per the approved concrete mix design.</p>									
<input checked="" type="checkbox"/> ARCH		<input type="checkbox"/> STR		<input type="checkbox"/> MEP		<input type="checkbox"/> ID/ED		<input type="checkbox"/> AI	
		Mohammad Hassan							
Signature:	Date:	Signature:	Date: 09/08/2024	Signature:	Date:	Signature:	Date:	Signature:	Date:

Ahmad Odeh



 <p><b>انوفيتيف للاستشارات</b> استشاريون في العمارة والهندسة <b>INNOVATIVE CONSULTANTS</b> CONSULTING ARCHITECTS &amp; ENGINEERS Tel.: +9714-2500173 / E-mail: iecon@iecon.ae / P.O.BOX: 7856</p>	<p><b>PROPOSED COMM. &amp; RESD. BUILDING</b> <b>(G+3P+1st+13typ+15th)</b> <b>FOR: MR. MOHAMED SALEH AHMAD</b> <b>Plot No.: (134-1549) @ AL MAMZAR, DUBAI, U.A.E.</b></p>	 <p><b>الجنح الذهبي للمقاولات ش.ذ.م.م.</b> <b>OLDEN WING</b> CONTRACTING LLC</p>
<p><b>MATERIAL APPROVAL SUBMITTAL</b> <span style="float: right;"><b>IC-2024-03-MA- 15/R1</b></span></p>		
<p><b>To: M/s. INNOVATIVE Consultants:</b></p> <p>Please find attached the following Material Submittal for your approval/comments:</p>		
<p><b>Discipline:</b> <input checked="" type="checkbox"/> Civil/Structural <input type="checkbox"/> Architectural <input type="checkbox"/> Electrical  <input type="checkbox"/> Mechanical <input type="checkbox"/> Plumbing <input type="checkbox"/> Others</p>		
<p><b>Material Details:</b></p>		<p><b>List of Enclosures:</b></p>
Item Description	Ready Mix Concrete - Mix Design	<input type="checkbox"/> Vendor's Technical Literature <input type="checkbox"/> Compliance Statement <input type="checkbox"/> Comparison Sheets <input type="checkbox"/> Previous Test Results <input type="checkbox"/> Copy of the Related Specs & Other Contract Documents <input type="checkbox"/> Samples <input type="checkbox"/> List of Projects Done <input type="checkbox"/> Others
Specs Reference		
BOQ Reference		
Drg. Reference		
Material Specified		
Material Proposed	Ready Mix Concrete - Mix Design	
Manufacturer/ Local Supplier	S.S Lootah Ready Mix Concrete LLC, P.O Box 553, Dubai, UAE, Tel No. 04-3470080	
<p><b>Submitted by: Eng. Danish Parwez</b> <b>Signature:</b>  <b>Date: 15.07.2024</b></p>		
<p><b>INNOVATIVE CONSULTANTS COMMENTS:</b></p> <p><input type="checkbox"/> Approved  <input checked="" type="checkbox"/> Approved with Comments  <input type="checkbox"/> Not Approved, Resubmit</p> <p><b>Comments:</b></p> <p style="color: blue;">         • No objection for the mix designs subject to satisfactory test results by an approved third party testing laboratory for the trial mix cubes.          • Number of cubes to be taken as following:          - For vertical element: 6 cubes every 10 m<sup>3</sup> (3 for 7 days &amp; 3 for 28 days).          - For slab &amp; beams: 6 cubes every 50 m<sup>3</sup> (3 for 7 days, 3 for 28 days).          - For mass concrete (rafts): 6 cubes every 100 m<sup>3</sup> (3 for 7 days &amp; 3 for 28 days).          • All cubes must be tested at third party laboratory approved by the Engineer.          • All reports must be submitted for Engineer approval.       </p> <p><b>Checked by:</b>  <b>Signature:</b>  <b>Date:</b> 16/07/2024  <b>Confirmed by:</b> ..... <b>Signature:</b> ..... <b>Date:</b> .....</p>		
<p><small>Note:          INNOVATIVE Comments shall not be considered as a reason of claim of any type unless it is issued via E.I.          The contractor should seek an E.I. if he considers that INNOVATIVE comments contain financial or time impact.</small></p>		

• Curing must be done as per project specs. • strictly, No chemicals / water are allowed to be added at site.  
 • Maximum allowed time for any concrete truck at ~~site~~ site is 2 hrs from time of batching subject to satisfactory slump test.



## MATERIAL APPROVAL REQUEST FORM (MARF)

MPL-P275 → MARF00240625-CN-B10 WITH COMMENTS

DATE SUBMITTED: <b>24/06/2024</b>	PLOT NO & LOCATION: <b>PLOT NO 3323875, LA MER – LMSC 12, JUMEIRAH FIRST, DUBAI-EAE</b>	PROJECT: <b>PRIVATE B+G+1+R VILLA</b>	REFERENCE NO. <b>MAR-STR-010</b>
MAIN CONTRACTOR : <b>ONYX GENERAL CONTRACTING L.L.C</b>		SUB-CONTRACTOR :	REVISION NO. <b>00</b>

REQUEST APPROVAL FOR:

STRUCTURAL / CIVIL ☐ ARCHITECTURAL ☐ MEP ☐ HVAC ☐ GLASS & ALUMINIUM ☐ FINISHES ☐

MATERIAL DESCRIPTION:

**MATERIAL SUBMITTAL FOR CRYSTALLINE WATERPROOFING CONCRETE  
ADMIXTURES & REPAIR SYSTEM**

LOCATION TO BE USED:

**WATER STOPPER WORKS**

NO.	MATERIALS	MANUFACTURER NAME/ORIGIN	SUPPLIER NAME	APPLICATOR
1	<b>CRYSTALLINE WATERPROOFING CONCRETE ADMIXTURES &amp; REPAIR SYSTEM</b>	<b>CORMIX</b>	<b>GALAXY SPECIALISED</b>	<b>ONYX</b>

Attachment to this submittal:



* Brochure/Catalogue	<input type="checkbox"/>	* Technical Data	<input type="checkbox"/>
* Sample	<input type="checkbox"/>	* Previous Test Certificate	<input type="checkbox"/>
* Manufacturer's Guarantee	<input type="checkbox"/>	* Alternative Proposal	<input type="checkbox"/>
* Method Statement	<input type="checkbox"/>	* Compliance Certificate	<input type="checkbox"/>
* Pre-qualification Documents	<input type="checkbox"/>	* Manufacturer's License/others	<input type="checkbox"/>

We certify that the materials submitted herewith have been reviewed in detail and are in strict conformance with the contract drawings and specifications except as otherwise stated.

Check and Verified by Main Contractor: (Hardcopy 3set with attached label sample)

### CONSULTANTS COMMENTS

1. No objection for the proposed subcontractor for Crystalline Waterproofing works, subject to full compliance with project specification and local authority requirements/regulations, etc.
2. 25 years guarantee certificate to be provided as per contract.
3. Leakage test to be done.
4. Application and storage shall be as per the manufacturer's instruction/recommendation.
5. Subject to mock-up sample for final approval.
6. Dubai Trade license should be valid during project construction period.
7. Final approval subject to quality of work, performance at site, T&C. Not limited to above comments.

APPROVED WITH COMMENTS <input checked="" type="checkbox"/>	REVISE & RESUBMIT <input type="checkbox"/>	REJECTED <input type="checkbox"/>
Consultants Engineer Name & Signature 		Date <b>1.5 JUL 2024</b> BY: 

\*Contractor to mark all relevant technical description in the literature.

\*Shall not relieve contractor of his liabilities under the contract approval.

\*Contractor should testify that the above submitted item have been reviewed in detail & are correct and in strict conformity with the contract drawings & specifications.



PROJECT : PROPOSED MIXED USED BUILDING ( RESIDENTIAL & RETAIL )  
( 2B+G+2P+14+R ) ON PLOT # AFMU001A , AL FURIAN, DUBAI

REF : BSC-95-MAT-CIV-017  
REV : 0.00

CONTRACTOR NAME : BIN SHAFAR CONTRACTING L.L.C

Submission of MATERIAL SUBMITTAL

CIVIL

Date: 28/05/2024

Submitted For \*

Code

APPROVAL

1

YOUR INFORMATION

2

REF:

Contract No.:

ACTION \*\*

APPROVED

APPROVED AS NOTED

REVISE & RESUBMIT

REJECTED

B

C

D

EDMAC Engineering Consultants

QTY	DRWS., SPEC. OR BOQ. REF.	ITEM SEQ NUMBER	DESCRIPTION	TYPE	CODE	
					Submittal	Action
1			GALAXY SPECIALISED WATERPROOFING SYSTEM - ADMIXTURE SYSTEM : CORMIX H2O STOP LIQUID ADMIXTURE CONTITE SEAL ACCI POLYCOAT RBE SPECTITE PVC WATER STOP	MS	1	
			PRODUCT NAME : CORMIX			
			Manufacturer / Supplier : M/s. GALAXY SPECIALISED WATERPROOFING CO LLC			

TYPE: ☒ MS : MATERIAL SUBMITTAL ☐ SM : SAMPLE ☐ GT : GUARANTESS ☐ MD : MAN. DATA ☐ TT : TEST RESULTS ☐ SP : SUB-PREQ  
☐ CA : CALCULATION ☐ MOS : METHOD STATEMENT ☐ TF : TEMP. FACILITIES ☐ CT : CERTIFICATE ☐ MK : MOCKUPS  
☐ SD : SHOP DRAWINGS ☐ OT : OTHERS

Specs. Reference:

BOQ Reference:

Location of use:

SUBSTRUCTURE - CONCRETE WORKS

Programme of Work Activity ID Ref:

Planned Start:

Programme of Work Description:

Planned Finish:

Copies :

SOFT COPY

1

HARD COPY

1

Main Contractor Statement:

We certify that the material submitted herewith has been reviewed in detail and is in compliance with the contract drawings and specifications except as otherwise stated hereabove

Authorised Name: ABDULAZIZ ABU KHAMIS

Signature:

CONSULTANT'S COMMENTS

- Main Contractor & Subcontractor shall be responsible for the submitted product
- Must comply with BM/Trackers regulations.
- Revised Trail mix to be submitted prior commencing the works for our review & records.
- Draft Warranty to be submitted for 25 years.
- Final approval is subject to the follow the manufacturer recommendation & satisfactory trail mix certificate

Copies To:

Project Manager :

For EDMAC Engineering Consultants

Date:

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the requirements of the drawings and specifications. This check is only for review of general conformance with the design concept of the project and general compliance with the information given in the contract documents. The contractor is responsible for confirming and correlating all quantities and dimensions selecting fabrication processes and techniques of construction; coordinating his work with that of other trades, and performing his work in a safe and satisfactory manner.

## MATERIAL SUBMITTAL SHEET (MSS)

Project No.: R-283

Package: Main Works

Project Name: Proposed Warehouses on Plot No. 3680700, Al Quoz, Industrial Area 3, Dubai

MSS No.:

MSS-STR-0061

Rev:

00

Date:

30-Mar-24

Submittal Related To:

Tick (✓) box where applicable

Architectural

Structural

MEP

Fit-out

General

Sl.No.	BOQ Ref.	Document No.	Rev	Description	Code
1		MSS-STR-0061	00	Material Submittal for Crystalline liquid admixture system (M/s Galaxy Specialised Waterproofing Co. LLC)	

(continue on second page in case items do not fit in this sheet)

Contractor's Representative:

Sign:

Name: Eadi Abdullah (Project Manager)

Date: 30-Mar-24

Sub-contractor's Representative:

Sign:

Name:

Date:

Action by Engineer/  
Consultant/ Employer/  
Project Manager

- A** : No Objection, minor comments to be incorporated, works may proceed, resubmission not required.
- B** : No Objection, comments as noted, works may proceed, resubmission required within 14 days. Failure to submit will result in status downgrade to C.
- C** : Rejected, submittal is incorrect/unacceptable or incomplete to such an extent that a complete review cannot be undertaken.
- D** : For information only, review/inspection not required.

Engineer's/Technical & Supervision Consultant's Comments:

No objection subject to M/s Arcan Approval

01 APR 2024

12:30pm

By: [Signature]  
ARCAN PROJECT MANAGEMENT SERVICES



Sign:

Name:

Date:

Note: Employer's/ Engineer's approval is for conformance with information given and design concept expressed in Contract Documents. Approval does not authorize changes to Contract Documents. Employer's/ Engineer's approval does not relieve the Contractor from his contractual obligation to ensure conformance to all Contract Documents. Any deviations, to the Contract Documents found subsequent to Employer's/ Engineer's approval are to be corrected by the Contractor at no extra Cost/Time to the Employer. Notwithstanding any other provision of the Contract, the term "No Objection" when used in the context of any comments given by or on behalf of the Engineer shall have the meaning "No Objection to general principals only" and no such comments shall diminish or relieve the Contractor or subcontractor from any of his obligations or liabilities under the Contract or subcontract agreement and Statutory Requirements.

Comments by Project Manager (Arcan Project Management Services):

- Subject to full comply with Project requirements, Contract doc's spec & all relevant Arabic regulations
- Warranty letter to be provided

Sign:

Name:

Date:

DISTRIBUTION:



Employer ☐

Project Manager ☐

Engineer/ Consultant ☐

Contractor ☐



CONSULTANT		CLIENT		CONTRACTOR	
 آيكونيك للاستشارات المعمارية والهندسية ICONIC ARCHITECTURAL & ENGINEERING CONSULTANTS		<b>MR. TALIB KHAIRALLAH MAJWAL</b>		 <b>OLDEN WING</b> CONTRACTING LLC	
PROJECT DETAILS		<b>PROPOSED COMM. &amp; RESD. BLDG. (G+6+R) ON PLOT NO. 421-0137 @ AL WARQA 1ST, DUBAI, U.A.E.</b>		LOCATION:	<b>AL WARQA FIRST</b>
MATERIAL SUBMITTAL REF NO.		<b>17</b>		DATE:	<b>22.02.2024</b>
<b>MATERIAL SUBMITTAL</b>					
DEPARTMENT		<input checked="" type="checkbox"/> STRUCTURAL <input type="checkbox"/> MECHANICAL	<input type="checkbox"/> ARCHITECTURAL <input type="checkbox"/> PLUMBING	<input type="checkbox"/> ELECTRICAL <input type="checkbox"/> OTHER.	
MATERIAL DETAILS		LIST OF ENCLOSURES			
ITEM DESCRIPTION	<b>Water Proofing Work for Sub Structure</b>	<input type="checkbox"/> VENDER TECHNICAL LITERATURE			
SPECS REFERENCE		<input type="checkbox"/> COMPLIANCE STATEMENT			
BOQ REFERENCE		<input type="checkbox"/> COMPARISON SHEETS			
DRG. REFERENCE		<input type="checkbox"/> PREVIOUS TEST RESULTS			
MATERIAL SPECIFIED		<input type="checkbox"/> COPY OF THE RELATED SPECS. & OTHER CONTRACT			
MATERIAL PROPOSED	<b>Water Proofing Work for Sub Structure - Raft and Water Tank</b>	<input type="checkbox"/> SAMPLE			
MANUFACTURER'S LOCAL SUPPLIER	<b>Cormix International Ltd / Galaxy Specialized Waterproofing Co. LLC , P.O Box 113678, Dubai, U.A.E. Tel No. 55-8824150.</b>	<input type="checkbox"/> LIST OF COMPLETED PROJECTS			
CONSULTANT'S PM/RE/PROJECT ENGINEER		NAME & SIGN		DATE:	
CONTRACTOR'S QA/QC		NAME & SIGN		DATE:	
CONTRACTOR'S PM/PE/ SITE ENGINEER		NAME & SIGN		DATE:	<b>22.02.2024</b>
<b>For, ICONIC ARCHITECTURAL &amp; ENGINEERING CONSULTANTS APPROVAL/ COMMENTS</b>					
<input type="checkbox"/> APPROVED <input checked="" type="checkbox"/> <b>APPROVED AS NOTED</b> <input type="checkbox"/> REVISE & RESUBMIT <input type="checkbox"/> REJECTED					
<p><i>No objection for Using Cormix H2O stop water Proofing material by Galaxy</i></p> <p><i>1) Subject to Fully Compliance with the Project's SPECS &amp; approved Dmgs</i></p> <p><i>2) Subject to Fully Compliance with authorities requirements &amp; regulations</i></p> <p><i>3) Subject to the Trial mix Satisfactory &amp; approval</i></p> <p><i>4) Renewal of Trade license &amp; DCL Certificate</i></p> <p><i>5) Subject to Quality &amp; Performance at site</i></p> <p><i>6) Concrete Temperature to not exceed the 30°C during Casting</i></p>					
CONSULTANT'S PM/RE/PROJECT ENGINEER		NAME & SIGN		DATE:	<b>28/2/2024</b>
CONTRACTOR'S QA/QC		NAME & SIGN		DATE:	
CONTRACTOR'S PM/PE/ SITE ENGINEER		NAME & SIGN		DATE:	<b>22.02.2024</b>





Project Name : G+4 Residential Building in Plot (#1240411), Al Muraqqabat - Dubai



TRD. LIC. NO. 218847

**ZABEEL**  
CONTRACTING

T: +971 4 5537500, E: info@zabeel.com  
P.O. Box 5815, Dubai, UAE



رقم الترخيص التجاري : 218847  
**زعبيل**  
للمقاولات  
info@zabeel.com - 04 5537500  
P.O. Box 5815 - دبي - الإمارات العربية المتحدة

## COMMENTS SHEET

Ref : J214-PQ-CVL-11

Rev : 00

Date : 15 January 2024

### ENGINEER'S COMMENTS:

No objection for the proposed supplier M/s. Galaxy Specialized Waterproofing CO LLC to carry out the crystalline admixture works , subject to the followings :

1. Comply with local authority Rules & Regulations.
2. to submit material submittal for review and approval.
3. Submit method statement for the activity.
4. Warranty letter by the supplier shall be provided.
5. Only certified trained applicator authorized by the manufacturer shall carry out the works at site.
6. The main contractor is responsible to coordinate between the subcontractor (M/s. galaxy) and concrete supplier.

Reviewed by:

For : Ahmed Zahran

Signature

Date

: 15-1-2024

Document Ref #	J214-MS-CVL-16	Rev.00	Date: 11.01.2024	Sheet:
----------------	----------------	--------	------------------	--------

<b>PROJECT</b>	: G+4+R RESIDENTIAL BUILDING ON PLOT NO.1240411, AL MURAQQABAT, DUBAI U.A.E	<b>PROJECT #:</b> J214
<b>CLIENT</b>	: CAPITAL UNITED LLC	
<b>CONSULTANT</b>	: ENGINEERING CONSULTANTS GROUP (ECG)	
<b>CONTRACTOR</b>	: ZABEEL CONTRACTING CO LLC	<b>DATE:</b> 11.01.2024

## APPLICATION FOR APPROVAL


<b>TO:</b> ECG	<b>ATTN:</b> PROJECT MANAGER
----------------	------------------------------

### CONTRACTOR'S PROPOSAL

<b>APPLICATION FOR:</b>	<input type="checkbox"/> DESIGN	<input type="checkbox"/> QA/QC STATEMENT (M.S)	<input type="checkbox"/> SAMPLE
<b>APPROVAL OF:</b>	<input type="checkbox"/> WORKING DRAWING	<input checked="" type="checkbox"/> MATERIALS	<input type="checkbox"/> TEST REPORT
	<input type="checkbox"/> PREQUALIFICATION DOC.	<input type="checkbox"/> EQUIPMENT	<input type="checkbox"/> OTHER


**TITLE & DESCRIPTION:** Crystalline Admixture (Cormix H20 Stop Liquid)

**LOCATION:** SUB STRUCTURE

<b>ORIGINATED:</b> ZABEEL CONTRACTING CO LLC	<b>REF TO CONTRACT DOCUMENT:</b>	
<b>SUPPLIED BY:</b> GALAXY SPECIALISED WATERPROOFING CO LLC	<b>BOQ ITEM NO.:</b>	Variation No -01
<b>INSTALLED BY:</b> GALAXY SPECIALISED WATERPROOFING CO LLC	<b>SPEC. SECTION &amp; CLAUSE:</b>	
	<b>DRAWING REF. NO.:</b>	S-01-001
<b>CONTRACTOR'S CONFIRMATION:</b>	<b>CONTRACTOR:</b>	<b>ECG RECEIVED:</b>
<input checked="" type="checkbox"/> CONFIRMS TO SPECIFICATIONS		
<input type="checkbox"/> CONSIDERED TO BE EQUAL / BETTER THAN SPECIFIED	<b>SIGNATURE :</b>	<b>SIGNATURE :</b>
<input type="checkbox"/> REASON FOR ALTERNATIVE	<b>DATE : 11.01.2024</b>	<b>DATE :</b>

### ECG APPROVALS / COMMENTS

1- Approved as noted.	<input type="checkbox"/> APPROVED (A)
2- Refer to engineer notes on the attached comments sheet.	<input checked="" type="checkbox"/> APPROVED AS NOTED (AAN)
	<input type="checkbox"/> REVISE & RESUBMIT (R&R)
	<input type="checkbox"/> REJECTED (R)

<b>FOR ECG</b>	<b>RECEIVED BY EMPLOYER REP:</b>
<b>NAME :</b> For : Ahmed Zahran	<b>NAME :</b>
<b>TITLE :</b> Resident Engineer	<b>SIGNATURE:</b>
<b>SIGNATURE:</b> 	<b>DATE :</b>
<b>DATE :</b> 15-1-2024	

### EMPLOYER REPRESENTATIVE APPROVAL / COMMENTS

<input type="checkbox"/> APPROVED (A)
<input type="checkbox"/> APPROVED AS NOTED (AAN)
<input type="checkbox"/> REVISE & RESUBMIT (R&R)
<input type="checkbox"/> REJECTED (R)

<b>EMPLOYER REP:</b>	<b>TITLE:</b>	<b>SIGNATURE :</b>	<b>DATE:</b>
<b>RECEIVED BY CONTRACTOR</b>	<b>NAME</b>	<b>TITLE</b>	<b>DATE</b>
<b>SIGNATURE:</b>			

APPROVAL VIDE THIS DOCUMENT SHALL NOT IN ANY WAY RELIEVE THE CONTRACTOR OF HIS RESPONSIBILITIES FROM THE COMPLIANCE TO THE CONTRACT CONDITIONS AND THE SPECIFICATIONS NOR ENTITLE HIM FOR ANY VARIATION CLAIM.



Project Name : G+4 Residential Building in Plot (#1240411), Al Muraqqabat - Dubai



TRD. LIC. NO. 218847

**ZABEEL**  
CONTRACTING



## COMMENTS SHEET

Ref : J214-MS-CVL-16

Rev : 00

Date : 11 January 2024

### ENGINEER'S COMMENTS:

No objection for the proposed material Crystalline Admixture (Cormix H20 Stop Liquid) supplied and installed by M/s. Galaxy Specialized Waterproofing CO LLC, subject to the followings :

1. Comply with local authority Rules & Regulations.
2. Submit method statement for the activity.
3. Only certified trained applicator authorized by the manufacturer shall carry out the works at site.
4. Contractor to strictly follow manufacture recommendation for storage and application.
5. MIR to be submitted upon delivery of the materials at site for Engineer's approval.
6. Stage wise inspection request shall be submitted for ECG review and approval.
7. After installation completion manufacturer shall inspect the work and certify.
8. sub-contractor shall provide clearance letter to be attached with steel IR once the work is done at site and inspected.

Reviewed by:


For : Ahmed Zahran

Signature

Date



:

15-1-2024


	<b>JB1 VILLA (MV68 &amp; MV69), JUMEIRAH BAY, DUBAI, UNITED ARAB EMIRATES</b>	
<b>MATERIAL APPROVAL SUBMITTAL</b>		
<b>Contract No.:</b> AE_DXB_JBI_MJAFAR_VILLA		<b>Work Package:</b> MAIN WORKS
<b>MAS Ref. No.</b> JBI-C-PG-KEN-MAS-STR-RH-018		<b>Date :</b> 17-Nov-23
<b>Rev. No.</b> 01		<b>Sample tag Ref. No.</b>
<b>Discipline :</b> <input type="checkbox"/> Architectural <input checked="" type="checkbox"/> Structural <input type="checkbox"/> Mechanical <input type="checkbox"/> Electrical <input type="checkbox"/> Plumbing <input type="checkbox"/> Fire Protection. <input type="checkbox"/> Others.		
<b>Material Details</b>		
<b>Item Description :</b> CONCRETE MIX DESIGNS		<b>BOQ Item No. :</b> SECTION C, CONCRETE WORKS
<b>Name of Material :</b> C50 WITH CRYSTALLIZATION (H2O STOP)		<b>Reference Spec. Clause:</b> INCLUDED IN SECTION C
<b>Location of intended use :</b> SUBSTRUCTURE WATER TANK WALLS, POOLS, WATER FEATURE, BASEMENT WALLS & RAFT		<b>Drawing Ref. :</b> INCLUDED IN DWGS FROM ST-100 TO ST-702
<b>Manufacturer / Local Supplier :</b> READY MIX BETON		<b>Country of Origin :</b> UAE
<b>Reason for Submittal :</b> <input checked="" type="checkbox"/> For Approval <input type="checkbox"/> For Information <input type="checkbox"/> Others ( )		
<b>Remarks :</b> <input type="checkbox"/> As per Original <input type="checkbox"/> Alternative <b>COMPLY TO DM 225 CIRCULAR AND AS PER APPROVED SET</b>		
<b>Attachments :</b> <input type="checkbox"/> Drawing <input type="checkbox"/> Spec. <input type="checkbox"/> Sample <input type="checkbox"/> Catalog		
<b>For Contractor</b>		
<b>Prepared by Material Engineer :</b> YOUSSEF MOURAD Signature:  		<b>Date:</b> 17-NOV-2023
<b>Checked/Approved by QA Manager :</b>		<b>Date:</b>
<b>Engineer's Review &amp; Comments :</b>		
1. Contractor shall arrange the schedule of the Trial Mix Design at the Concrete Batching Plant at the earliest with the Engineer. 2. Refer Notes in the attached Notes Sheet.		
<b>Returned to Contractor with Status :</b>		
<input type="checkbox"/> A : Approved <input checked="" type="checkbox"/> B: Approved as noted <input type="checkbox"/> C: Revise / Resubmit <input type="checkbox"/> D: Information		
<b>For Engineer</b>		<b>Receipt Acknowledged by: Contractor</b>
<b>Name &amp; Signature :</b>  Royce Agabas <b>Date :</b> 29-Nov-2023		<b>Name &amp; Signature:</b>
<b>Date :</b>		<b>Date:</b>
<b>For: Client's Approval</b>		
<b>Name &amp; Signature :</b>		
<b>Date :</b>		
<b>Distribution :</b> <input checked="" type="checkbox"/> Employer <input checked="" type="checkbox"/> Project Manager <input checked="" type="checkbox"/> Consultant <input checked="" type="checkbox"/> Arch. Sub Consultant <input checked="" type="checkbox"/> Others ( )		
<small>The Architect/Engineer's review of this drawing/document is for the purpose of ascertaining conformity with the basic concept, profiles and general arrangements only. The review shall not be construed to mean that the Architect/Engineer accepts the detail design in the drawing, responsibility for which will remain with the Contractor. The contractor is responsible for any errors or omissions on the drawing and for meeting the requirements of the Contract documents.</small>		



<b>Client</b>	<b>Consultant</b>	<b>Main Contractor</b>
<b>PREQUALIFICATION SUBMITTAL</b>		
<b>PROJECT :</b> PROPOSED RESIDENTIAL BUILDING (B+G+4+ROOF) <b>PNO &amp; LOCATION :</b> JVC11RMRP004/JVC <b>CLIENT :</b> IMAN GROUP LIMITED <b>CONSULTANT :</b> EMSQUARE ENGINEERING CONSULTANTS		
No: CJ/165/CVL/PQ/07 Rev:0 Date: 24/05/2023		
WE ARE SUBMITTING HERewith DOCUMENTS FOR REVIEW & APPROVAL		
Technical Submission	Architecture <input type="checkbox"/> HVAC <input type="checkbox"/>	Structure <input type="checkbox"/> FF, FA & EL <input type="checkbox"/>
	Electrical (HV / LV) <input type="checkbox"/> Specialist Works <input type="checkbox"/>	Plumbing & Drainage <input type="checkbox"/> Specialist Works <input checked="" type="checkbox"/>
Drawing Ref:		
BOQ & Specs Ref:		
Prequalification Description: PREQUALIFICATION OF WATERPROOFING SUPPLIER FOR SUBSTRUCTURE WATERPROOFING		
Prequalification Details: WATERPROOFING WORK SUPPLIER - GALAXY SPECIALISED WATERPROOFING CO LLC		
Enclosures: Attached		
Submitted By: P.O Box: 79102 Main Contractor: Dubai - UAE	Conformity By: MEP Contractor:	Conformity By: Specialist Contractor:
		Received By: Consultant
<b>CONSULTANT COMMENTS:</b>		
<p>①. No objection to use the waterproofing material (Core Mix H<sub>2</sub>O stop) subject to the compliance with project specifications &amp; authority regulations and Satisfactory          → (Trial Mix Test results)</p> <p>②. Approval of Material will be given after 28 days Test results of Trial Mix.</p> <p>③. Trade license / DCL certification to be submitted upon expiry.</p> <p>④. Approval shall be null/void in case of unsatisfactory site performance.</p>		
<b>CLIENT COMMENTS:</b>		
<b>Consultant Recommendation</b>	Approved <input checked="" type="checkbox"/> Approved With Comments <input type="checkbox"/> Revise & Re-Submit <input type="checkbox"/> Rejected <input type="checkbox"/> For Discussion <input type="checkbox"/>	
<b>Client Recommendation</b>	Approved <input type="checkbox"/> Approved With Comments <input type="checkbox"/> Revise & Re-Submit <input type="checkbox"/> Rejected <input type="checkbox"/> For Discussion <input type="checkbox"/>	
Corrections or comments made relative to submittals during this review does not relieve the contractor from compliance with the requirements of the drawings, specifications & authority norms & regulations. This check is only for review of general conformance with the design concept of the project and general compliance with the information given in the contract documents. The contractor is responsible for confirming and correlating all design details & specifications, authority norms & regulations, method statement, shop-drawings & design approvals, manufacturer recommendations, fabrication process and techniques of construction along with coordinating work with other trades, and executing the works in a safe and satisfactory manner.		
<b>FOR EMSQUARE ENGINEERING CONSULTANT</b>		<b>FOR (Client *****)</b>
QC ENGINEER - CIVIL Sign & Date:	QC ENGINEER - MEP Sign & Date:	PROJECT ENGINEER - MEP Sign & Date:
RESIDENT ENGINEER - CIVIL Sign & Date:	RESIDENT ENGINEER - MEP Sign & Date:	PROJECT ENGINEER - CIVIL Sign & Date:
		PROJECT MANAGER - MEP Sign & Date:
		PROJECT MANAGER - CIVIL Sign & Date:
Additional Comments / Information:		
<p>A. J. 25/5/2023</p>		

IMAN		 <b>EMSQUARE</b> ENGINEERING CONSULTANT ARCHITECTS & CIVIL ENGINEERS		 <b>C.J. TEC CONTRACTING (L.L.C)</b> شركة جيه تيك للتقانات (ش.م.ع)				
Client		Consultant		Main Contractor				
<b>MATERIAL &amp; SAMPLE APPROVAL SUBMITTAL</b>								
PROJECT : <b>PROPOSED RESIDENTIAL BUILDING (B+G+4+ROOF)</b> PNO & LOCATION : <b>JVC11RMRP004/JVC</b> CLIENT : <b>IMAN GROUP LIMITED</b> CONSULTANT : <b>EMSQUARE ENGINEERING CONSULTANTS</b>								
No: CJ/MS/165/05 Rev: 0 Date: 24/02/2023								
WE ARE SUBMITTING HERewith THE MATERIALS & SAMPLES FOR REVIEW & APPROVAL								
Technical Submission	Architecture	<input type="checkbox"/>	Structure	<input type="checkbox"/>	Electrical (HV / LV)	<input type="checkbox"/>	Plumbing & Drainage	<input type="checkbox"/>
	HVAC	<input type="checkbox"/>	FF. FA & EL	<input type="checkbox"/>	Specialist Works	<input type="checkbox"/>	Specialist Works	<input checked="" type="checkbox"/>
Drawing Ref: <b>⑦. C.J. Tec to send Confirmation letter after verifying the Core Mix addition into the Mix.</b> BOQ & Specs Ref: <b>(Core mix H2O stop liquid)</b> Material Details: <b>CORMIX H2O STOP LIQUID (For Substructure waterproofing)</b> Manufacturer Details: <b>CORMIX</b> Enclosures: <b>Attached Box: 79102 Dubai, U.A.E.</b>								
Submitted By: Main Contractor		Conformity By: MEP Contractor		Conformity By: Specialist Contractor		Received By: Consultant		
<b>CONSULTANT COMMENTS:</b>								
①. DCL certificate for the material is acknowledged (Ref # CL19020718 valid until 10/11/2023). ②. Material is complying as per the DCL Scope Certification. ③. Trial Mix results have been acknowledged and the compressive strength (28 days) is more than 56 N/mm <sup>2</sup> .								
<b>CLIENT COMMENTS:</b>								
④. C.J. Tec Undertaking letter (Ref: CJ/165/6040/2023) has been Noted. ⑤. Main Contractor to verify the "Mixing of water proofing liquid" into the Concrete at the plant.								
Consultant Recommendation		Approved	Approved With Comments	Revise & Re-Submit	Rejected	For Discussion		
Client Recommendation		Approved	Approved With Comments	Revise & Re-Submit	Rejected	For Discussion		
Corrections or comments made relative to submittals during this review does not relieve the contractor from compliance with the requirements of the drawings, specifications & authority norms & regulations. This check is only for review of general conformance with the design concept of the project and general compliance with the information given in the contract documents. The contractor is responsible for confirming and correlating all design details & specifications, authority norms & regulations, method statement, shop-drawings & design approvals, manufacturer recommendations, fabrication process and techniques of construction along with coordinating work with other trades, and executing the works in a safe and satisfactory manner.								
<b>FOR EMSQUARE ENGINEERING CONSULTANT</b>				<b>FOR (Client *****)</b>				
QC ENGINEER - CIVIL Sign & Date:		QC ENGINEER - MEP Sign & Date:		PROJECT ENGINEER - MEP Sign & Date:		PROJECT ENGINEER - CIVIL Sign & Date:		
RESIDENT ENGINEER - CIVIL Sign & Date:		RESIDENT ENGINEER - MEP Sign & Date:		PROJECT MANAGER - MEP Sign & Date:		PROJECT MANAGER - CIVIL Sign & Date:		
Additional Comments / Information: <b>⑥. Delivery Note to be checked on delivery.</b> <b>25/5/2023</b>								



Project	PROPOSED B+G+5+R RESIDENTIAL BUILDING ON PLOT NO. JVC11WMP004 AT JVC, DUBAI,				
<b>DOCUMENT SUBMITTAL</b>					
Submittal No.	17	Rev	00	<input checked="" type="checkbox"/> New submittal <input type="checkbox"/> Re-submittal	Date 11-08-2022
SubContractor	M/s Galaxy Specialised Waterproofing Co. L.L.C				
Discipline	Architectural	Structural	Electrical	Mechanical	Other
		✓			
<b>Document Details</b>					
Sr.	Document Ref	Rev	Document Title		
1			Method of statement (water proofing works)		
Your are kindly requested to review and to comment the above listed Document (s)					
QA/QC	Name VISHNUSAGAR	Signature	Project Manager	Name Anish Herbert	Signature
					
Received by Consultant					
Name	Signature		Date		
Document Ref	Comments		Status		
Approved As Noted:					
1- Contractor and sub-Contractor to comply with Engineer comments on material / prequalification submission comments.					
2- Contractor and sub-Contractor to coordinate properly to achieve the required technical issues and to achieve max quality level.					
3- Contractor and sub-Contractors requested to comply with authority requirements.					
4- Final approval is subject to trial mix approval.					
5- Final approval is subject to performance at site.					
Approved		Approved With Comments		Revise & Resubmit	
Commented by		Name		Signature	
QA/QC					
Project Manager		A. El Seidy		12/08/2022	
Received Back By the contractor					







**MATERIAL APPROVAL REQUEST (MAR)**

Project Name : **MAJAN RESIDENTIAL BUILDING - WADI AL SAFA-3 DUBAI** Ref.No. ODC/SIT/P03/MAT/056 R00 REV. 0  
Project No. : **P03** Date Request **26-06-2022**

**Submittal Contents:**

☐ - Material/Sample ☐ - Catalogue/Brochure ☐ - Mock-up ☒ - others Technical Submittals

**Description of Material / Equipment:**

TECHNICAL SUBMITTAL FOR:

**1 PRE- QUALIFICATION M/S. GALAXY (WATERPROOFING)**

SOFT COPY

**Manufacturer / Supplier Details:**

a.) Local Supplier / Agent: Company Name : **GALAXY SPECIALISED WATERPROOFING** b.) Manufacturer : Company Name :  
Address / Contacts : **DUBAI** Address / Contacts :  
**00971-558824150**  
☐ - Locally Manufactured ☐ - Imported c.) Country of Origin: **UAE**

**Discipline**

☐ - Civil / Structural ☐ - Architectural ☐ - Electrical ☐ - Mechanical  
☐ - HVAC ☒ - Others

1. Project Engineer:

ENG. .

Name / Sign / Date

2. Project Manager

ENGR. SALIH ALI SALIH

Name / Sign / Date

26-06-2022



CONSULTANT COMMENTS

No objection for the proposal Submittals.  
Warranty to be provide for the work

**STATUS**

☐ Code A : APPROVED ☒ Code B1 - APPROVED as Noted ☐ Code C : NOT APPROVED

**CONSULTANT SIGN-OFF**

1. Engineer:

*Mathew*

Name / Sign / Date

2. Project Manager/Resident Engineer

Name / Sign / Date



**Villa For Mr.Satish Sanpal and Mrs. Tabinda Manzoor**

**REQUEST FOR MATERIAL/SAMPLE APPROVAL**  
**Doc No. CC-EDM-MS-CIVIL-013**

REV.01

Proposed B+G+1 Residential Villa on Plot No. 631-10676, For Mr. Satish Sanpal and Mrs. Tabinda Manzoor at Hadaeq Sheikh Mohammed Bin Rashid, Dubai Hills - Dubai, U.A.E.

**Date: 20.05.2022**

CONTRACTOR: M/s. Chirag Contracting L.L.C

Submitted For \*

Code

APPROVAL

1

YOUR INFORMATION

2

CLIENT: Mr.Satish Sanpal and Mrs. Tabinda Manzoor

Contract No.:

**ACTION \*\***

APPROVED

A

APPROVED AS NOTED

B

REVISE & RESUBMIT

C

REJECTED

D

WE ARE SENDING HEREWITH / UNDER SEPARATE COVER, THE DRAWINGS/ DOCUMENTS / SAMPLES LISTED BELOW. (DELETE AS NECESSARY)

QTY	DRWS., SPEC. OR	DESCRIPTION	TYPE	CODE	
				Submittal No.	Action
1	Material/Drawing/Item name	Cormix H2O Stop Liquid Crystalline Admixture			
2	Description	Cormix H2O Stop Liquid Crystalline Admixture			
3	Manufacturer	Cormix International Limited			
4	Local Supplier	Galaxy Specialised Waterproofing Co. L.L.C			
5	Sub-contractor	Galaxy Specialised Waterproofing Co. L.L.C			
6	Location/use of material				

TYPE ☒ MS : MATERIAL SUBMITTAL ☐ SM : SAMPLE

☐ CA : CALCULATION

☐ SD : SHOP DRAWINGS

☐ MOS : METHOD STATEMENT

☐ OT : OTHERS

☒ GT : GUARANTESS ☒ MD : MAN. DATA

☐ TF : TEMP. FACILITY ☒ CT : CERTIFICATE

☒ TT : TEST RESULTS

☐ MK : MODEL

☐ SP : SUB-PREQ

Programme of Work Activity ID Ref:

Programme of Work Description:

Copies

جراغ للمقاولات (ش.ذ.م.م)  
CHIRAG CONTRACTING (L.L.C)  
P.O. Box : 31537, DUBAI - U.A.E.

Planned Start

Planned Finish

2:40pm

For Contractor Mr.Ahmed Magzoub ( PM )

CONSULTANT'S COMMENTS

No objection to proceed.

Copies To:

Project Manager :

For EDMAC Engineering Consultants

Date:

Copies To:

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the requirements of the drawings and specifications. This check is only for review of general conformance with the design concept of the project and general compliance with the information given in the contract documents. The contractor is responsible for confirming and correlating all quantities and dimensions selecting fabrication processes and techniques of construction; coordinating his work with that of other trades, and performing his work in a safe and satisfactory manner.





Villa For Mr.Satish Sanpal and Mrs.  
Tabinda Manzoor

REQUEST FOR SUB-CONTRACTOR PREQUALIFICATION  
CC-EDM-PREQ-CIVIL-003

REV.00

Proposed B+G+1 Residential Villa on Plot No. 631-10676, For Mr. Satish Sanpal and Mrs. Tabinda Manzoor at Hadaeq Sheikh Mohammed Bin Rashid, Dubai Hills - Dubai, U.A.E.

Date: 06.05.2022

CONTRACTOR: M/s. Chirag Contracting L.L.C

Submitted For \*

Code

APPROVAL

1

YOUR INFORMATION

2

ACTION \*\*

APPROVED

A

APPROVED AS NOTED

B

REVISE & RESUBMIT

C

REJECTED

D

WE ARE SENDING HERewith / UNDER SEPARATE COVER, THE DRAWINGS/  
DOCUMENTS / SAMPLES LISTED BELOW. (DELETE AS NECESSARY)

QTY	DRWS., SPEC. OR	DESCRIPTION	TYPE	CODE	
				Submittal No.	Action
1	Prequalification	Pre Qualification For Galaxy Specialised Waterproofing Co. L.L.C			
2	Description				
3	Manufacturer	Galaxy Specialised Waterproofing Co LLC			
4	Local Supplier	Galaxy Specialised Waterproofing Co LLC			
5	Sub-contractor				
6	Location/use of material	Waterproofing			

TYPE: ☒ MS : MATERIAL SUBMITTAL ☐ SM : SAMPLE ☐ GT : GUARANTESS ☐ MD : MAN. DATA ☐ TT : TEST RESULTS ☐ SP : SUB-PREQ  
☐ CA : CALCULATION ☐ MOS : METHOD STATEMENT ☐ TF : TEMP. FACILITY ☐ CT : CERTIFICATE ☐ MK : MOCKUPS  
☐ SD : SHOP DRAWINGS ☐ OT : OTHERS

Programme of Work Activity ID Ref:

Programme of Work Description:

Copies

Eng: Mr. Ahmed Magzoub  
CHIRAG CONTRACTING (L.L.C)  
For Contractor  
P.O. Box : 31537, DUBAI - U.A.E.

Planned Start:

Planned Finish:

Date: 06.05.2022

CONSULTANT'S COMMENTS

Galaxy water proofing is accepted subject to  
- Material sample submission  
- Method statement  
- Compliance statement

Copies To:

Resident Engineer :

For EDMAC Engineering Consultants

Date:

Copies To:

Corrections or comments made relative to submittals during this review do not relieve the contractor from compliance with the requirements of the drawings and specifications. This check is only for review of general conformance with the design concept of the project and general compliance with the information given in the contract documents. The contractor is responsible for confirming and correlating all quantities and dimensions selecting fabrication processes and techniques of construction, coordinating his work with that of other trades, and performing his work in a safe and satisfactory manner.

04/05/2022



Project	DXB-186 - Residential Building (B+G+M+1F+R) on Plot No.115-0181, @ AI Sabkha, Dubai, UAE. For Ms. Hana Obied Mohamed Elheillow & Ms. Mariam Obied Mohamed Elheillow							
<b>MATERIAL SUBMITTAL</b>								
Submittal No.	21	Rev	00	<input checked="" type="radio"/> New submittal <input type="radio"/> Re-submittal	Date	09.04.2022		
Material Description	Water Proofing Work for Sub Structure ( Basement)							
Country of Origin	UAE	Specified	Alternative	Architecture	Structure	Electrical	Mechanical	Other
Manufacturer		Local Supplier/Agent		Details				
Name	Cormix International Ltd		Galaxy Specialised Waterproofing Co. LLC					
Tel	971 55 8824150							
Fax	971 4 3201231							
PO Box	113678							
Email:	kapil@galaxysp.net							
BOQ	BS		Specs					
Drawings ref.								
Attached	Data Sheet	Sample	Catalogue	Profile	Calculations	Test Results	Other	
QA/QC	Name	Signature		Project Manager- Mond. Shakir Ahmad				
				Signature				

Received by Consultant			
Name	Signature		Date
Consultant Comments:			
* No objection to the proposed system Cormix H2O stop & Seal Acc.I.			
* Trial mix is required & revised mix design.			
* Our approval is based on the warranty for 25 years.			
Approved	Approved With Comments	More Information Required	Rejected
	Name	Signature	Date
Commented by	Mariam Kassen		
QA/QC			
Project Manager			
Received Back By	the contractor		

→ Contractor is responsible for validity of the provided certificates.



**TECHNICAL DOCUMENTS APPROVAL FORM**

Ref. No. : MCM-1016-TDS-CIVIL-01-00

Date : 04 January 2022

PROJECT NAME	PROPOSED DEVELOPMENT OF RESIDENTIAL VILLA (B+G+1+R) ON PLOT NO. PJFRN050_52, AT PALM JUMEIRAH, DUBAI, U.A.E.
CLIENT	Mr. NASSER ABDULLA MOHAMMED BIN HAFEZ AL JANAHI
MAIN CONTRACTOR	MCM BUILDING CONTRACTING LLC

DOCUMENT SUBMITTED : MIX-DESIGN OF SELF COMPACTING CONCRETE WITH H2O CORMIX FOR RETAINING WALL

FORM SUBMITTED BY :

for Main Contractor

FORM RECEIVED BY :

for Consultant

DATE :

DATE :

COMMENTS: No objection Subject with All Comments as following:

- ① Subject to Full Compliance with Project's Specifications, Contract Documents, Authorities regulations, and Green Building Requirements.
- ② successful concrete trial Mix. Along with air content, density, durability and compressive strength test result after 7, 28 days by third party laboratory in coordination with waterproofing subcontractor.
- ③ Maintain the concrete temperature Not to exceed 32°C by ice control

Approved
✓ Approved As Noted
Approved as Noted Resubmit
Not Approved
Not Required

SUPERVISING OFFICER'S APPROVAL : *Am*  
and Notify the Engineer prior any changes in Mix design.

DATE :

APPROVED BY HEAD OFFICE

DATE :

CLIENT'S APPROVAL

DATE :

APPROVAL FORM RECEIVED BY CONTRACTOR ON

DATE :

SIGNATURE : .....

for Main Contractor

- ④ Contractor to ensure that All of the proposed Materials fully complies with DM/Tarkhees regulations and requirements.
- ⑤ subject to Client review and approval.



## PROJECT TITLE:

ROSE HILL GARDENS ESTATES LLC (G+5) RESIDENTIAL  
BUILDING PLOT NO. 333-1429 AL BADA

## SHOP DRAWING SUBMITTAL

ROSE HILL GARDENS  
ESTATES LLC

MAKS



Ref. No: KKC-MAKS-CW-SDS-029

Rev: 1

Discipline:

CIVIL

Date: 26-Aug-21

To: M/s. MAKS ENGINEERING CONSULTANCIES

Subject: SHOP DRAWING SUBMITTAL FOR WATER PROOFING PLAN &amp; SECTION DETAILS BY M/S GALAXY SPECIALISED WATERPROOFING CO. LLC

## Document Status

☐ Uncontrolled☒ Controlled

## We are sending the following items:

☐ For Information☒ For Approval☐ Architectural☒ Drawings☐ Catalogue☒ Structural☐ Documents (Specify)☐ MEP☐ Other (Specify)☐ Other

Item Ref. / No.	Description	Revision	Remarks	Copies
GSWPS-103	WATER PROOFING PLAN	1		1 COPY + CD
GSWPS-106	WATER PROOFING SECTION DETAILS	1		



Subcontractor / Supplier / Manufacturer

Company Name &amp; Address: P.O. Box No.

Telephone No.:

Fax No.:

Email:

## AREA OF APPLICATION

Submitted by

Contractor's representative

KAMAL KHAWAJA BUILDING CONTRACTING LLC

Engr. Mohamed Hawwas

Date

26-Aug-21

## CONSULTANT'S COMMENTS:

No objection in principal to proceed as per detail A and B as attached.

Detail E will not be applicable as the Joint at this point is not allowed.

Comments in Rev.0 are still not fully incorporated. (Refer to comment in the drawing).

Checked by:

Signature

Date: 30-08-21

☐ A - Approved as submitted☐ B - Approved as noted incorporate & proceed☒ C - Revise & Re-submit☐ D - Rejected

Received by Contractor

Contractor's Representative

Signature

Date

Distribution:

☐ Employer☐ Consultant☐ Contractor☐ Others



Client:	Mr. Mahmood Mohammad Mohammad AlDalal	
	Mr. Ahmad Mohammad Mahmood AlDalal	
Main Consultant:	Islamic Architects Consulting Engineers	Main Contractor: 3D Construction L.L.C
Project:	Proposed 1B+Ground +3 +H.C + Roof Building	Location: Al Qonz Third , Plot No 358-7191

## SUB CONTRACTOR / SUPPLIER APPROVAL

### Section A: Submittal Details

Date:	23/06/2021			SUBMITAL REF	5			Revision		
Discipline:	Architectural <input type="radio"/>	Civil <input type="radio"/>	HVAC <input type="radio"/>	Pumping <input type="radio"/>	Electrical <input type="radio"/>	Fire Fighting <input type="radio"/>	IT / Communication <input type="radio"/>	External Work / Landscape <input type="radio"/>	Interior Design <input type="radio"/>	Other <input type="radio"/>

S.r	LOCAL SUPPLIER	MATERIAL DESCRIPTION
1	GALAXY SPECIALISED WATERPROOFING CO.LLC	WATER PROOFING

### Section B: Contractor anticipations about Consultant Recommendation

فهم ب : توقعات المقاول حول توصيات الاستشاري

	Yes	No	Yes	No	Yes	No
shall Resolve the query	<input type="radio"/>	<input type="radio"/>	يتم حل الإشعار	<input type="radio"/>	There will be an impact on the cost	<input type="radio"/>
A site instruction will be required	<input type="radio"/>	<input type="radio"/>	سيطلب إصدار تعليمات ميدانية	<input type="radio"/>	There will be an impact on the schedule	<input type="radio"/>
A Change order will be required	<input type="radio"/>	<input type="radio"/>	سيطلب إصدار أمر تغيير	<input type="radio"/>	If YES Expected impact on the cost	<input type="radio"/>
					If YES Expected impact on the schedule	<input type="radio"/>

On behalf of the contractor, I/We certify that the above submitted items have been reviewed in detail and are correct and in strict conformity with the contract drawing and specification except as otherwise stated.


أنا/نحن بالمقاول، نشهد بأن المواد المقدمة أعلاه، روجعت وفحصت على وجه صحيح وخللت على نحو كامل مع رسومات ومواصفات المصمم ما لم يذكر خلاف ذلك.

Project Manager:	Construction Manager:	QA/QC Engineer:	Submitted by:	Consultant's received Stamp & Signature
ENG. RANA HAIDAR				

### Section C: Consultant Comment & Recommendation

فهم ج : ملاحظات وتوصيات الاستشاري

Proceed with Galaxy specialised company as attached  
 Required technical submittal with shop drawings,  
 to be submit method statement

Signed By: Eng. Hassan  
 Signature:   
 Date: 27/06/21

### Section C: Submittal Status



فهم ج : حالة طلب الاعتماد

A- APPROVED ☐ B- APPROVED AS NOTED ☐ C- REVISE AND RESUBMIT ☐ D- REJECTED ☐ E- FOR INFORMATION ☐ F- NOT REQUIRED ☐

For and on behalf of M/s 3D Construction L.L.C	 <b>المعمار الاسلامي</b> للإستشارات الهندسية <b>Islamic Architects</b> Consulting Engineers	Contractor's received Stamp & Signature
---	---	---

Contractors or subcontractors agree to indemnify directly and jointly the reviewer and relieve the contractor from compliance with the requirements of the contract documents.  
 This check is only for review of general conformity with the design concept of the project and general compliance with information given in the contract documents.  
 The consultant is responsible for confirming and certifying all quantities and dimensions including fabrication processes and techniques of construction, coordination has made with other trades, and performing the work in safe and satisfactory manner.

المتسجلين أو المصنفين المتابعة يطلب الأمانة خلال هذا التوقيع ي تضي القبول من الإقرار باستلامات وتوقيع القبول.  
 هذا التحقق فقط لأغراض التوافق مع النسخة التصميمية المقدم و الإقرار على المعلومات الواردة ضمن وثائق العقد.  
 المقاول مسؤول عن تأكيد وريد كافة الكميات والأبعاد، و اختيار طرق التنفيذ وتجهيز التنفيذ و التنسيق على مع السجلات الأخرى، و أداء عمله بطريقة آمنة وموثوقة.

SUB-CONTRACTOR SUBMITTAL			
Project	P-1492 RESIDENTIAL VILLA B+G+1 ON PLOT NO. 3435474 AT AL WASL DUBAI		
Client	AMNA MOHAMMED AHMED KHALAF ALOTAIBA	Serial No.	PCC-MS-02-P003-27-R1
Consultant	AL AJMI ENGINEERING CONSULTANTS	Prev. No.	PCC-MS-02-P003-2
Contractor	PROJECO CONTRACTING L.L.C	Date	1/4/2021
Type:	<input checked="" type="checkbox"/> Civil <input type="checkbox"/> Survey	<input type="checkbox"/> Architectural <input type="checkbox"/> Plumbing & Drainage	<input type="checkbox"/> Electrical <input type="checkbox"/> HVAC <input type="checkbox"/> Lift <input type="checkbox"/> Other
Sub-Contractor Name and details:		Trade License Nbr: 697657	
GALAXY SPECIALISED WATERPROOFING CO. LLC (697657)			
Sub-Contractor proposed for:			
CRYSTALLIZATION CONCRETE (Water Proof Concrete)			
Attachments:			
Company Profile, Valid trade License, Method Statement, Draft of Warrantee Certificate			
Contractor comments:			
as per RFI reply, we are proposing Crystallization water proof concret instead of SBS mebrane water proofing			
Submitted by Contractor:		Received by Engineer:	
Name: ANSAR		Name: MOHD. ALSAHEN	
Date: 1/04/2021		Date: 01/04/2021	
Civil / MEP / MEPSE Engineer's Comments:		Date:	
Valid dubai trade license attached for reference. Valid til 04/11/2021			
Complaince statement attached with relevent standards and supporting test reports .Attached			
Comparason sheet with KIM attached for reference,Attached			
Vaild DCL certificate attached			
Warantee should be for minimum 10 years from the date of completion of the project /sample			
warantee lette,Attached			
		Signature: 	
Area Manager's Comments:		Date:	
Subject to full complaince during the Concrete time as mentioned on the M. statement			
		Signature: 	
The above submittal is: <input type="checkbox"/> Approved <input checked="" type="checkbox"/> Approved as noted <input type="checkbox"/> Resubmit <input type="checkbox"/> Rejected			
Supervision Dept. Manager:		Received by Contractor:	
Name: Amer H. Shehadeh		Name:	
Date: 07/04/21		Date:	

Approval from Consultant shall not relieve the contractor of any of his liabilities under the contract and does not supersede any contract document.

Main Contractor is to undertake these works on back to back basis with subcontractor and on own responsibility as well if subcontractor fails to perform for any defect attendance in the future.  
 As-built drawings should show the system used.





Government of Sharjah  
Department of Public Works  
Branches Department

حكومة الشارقة  
دائرة الأشغال العامة  
إدارة الأفرع

20/12/2020 :Date التاريخ

DJ-577-MDAF-076 : Ref.No المرجع

Material & Devices Approval Form نموذج طلب اعتماد مواد وأجهزة			
بيانات المشروع Project Details	إشياء مدرسة مايحة الخاصة - مايحة - طوي حمدة - قطعة رقم 316	رقم الحد: Cont. No	301-818
المقاول Contractor	شركة الدرويش الإمارات	الاستشاري Consult	كبري افش مي معماريون ومهندسون

نوع المواد المطلوب اعتمادها Material Submittal Type	أعمال انشائية Structural	أعمال اليكتر ميكانيك MEP	أعمال تشطيبات Architecture
--	--------------------------	--------------------------	----------------------------

Source المصدر	Manufacturer المصنع	Reference المرجع	Material as specified by priority المواد الموصى بها
Sharjah	M/s. BASF	General	Alternative Material of KIM Admixtura
	M/s. Cornix International Ltd		MasterLife WP3760 from M/s. BASF
			H20 Stop by M/s. Cornix International Ltd

Source المصدر	Manufacturer المصنع	Reference المرجع	Proposed Material for Approval المقترحة
UAE	As Above	As Above	As Above

Attachments المرفقات		Alternative Proposal البديلة			
Brochure الكتيب <input checked="" type="checkbox"/>	Source المصدر	Manufacturer المصنع	Alternative Material Name اسم المادة البديلة		
Catalogues الكتالوج <input checked="" type="checkbox"/>	UAE	As Above	As Above		
Guarantee الضمان <input type="checkbox"/>	Days أيام	Cost Impact (plus) تكلفة بالإضافة	Time Impact (plus) مدة بالإضافة	Equivalant	حالة المادة البديلة Altern. Mat. Status
( ≥ 2 ) Samples عينات <input type="checkbox"/>		Cost Impact (minus) تكلفة بالخصم	Time Impact (minus) مدة بالخصم		
C.O.F Orig شهادة منشأ <input type="checkbox"/>	Reason سبب التغيير				
C.O.F Test شهادات اختبار <input type="checkbox"/>	Mobile متحرك	Web موقع الكتروني	FAX فاكس	TEL هاتف	Supplier المورد
Data sheet البيانات الفنية <input checked="" type="checkbox"/>	054 3422455	insuf@alsindbadgroup.com	: 06-5345997	06 5345200	M/s Al Sindbad Insulation
M.O. Statement مبررة شتند <input checked="" type="checkbox"/>	Mobile متحرك	Email بريد الكتروني	FAX فاكس	TEL هاتف	Subcontractor مقاول الباطن

Contractor المقاول (ختم/توقيع) (Stamp/Sign)	Name of applicant اسم مقدم الطلب والصفة	Name of the recipient اسم المستلم	Consultant receipt (Date/sign) استلام الاستشاري (تاريخ/توقيع)
	Eng. Fehmi Hafiz	ل. ف. ح. ف. ح.	20/12/2020

Rejected مرفوض <input type="checkbox"/>	Re-Submit إعادة تقديم <input type="checkbox"/>	For Consultant use لاستخدام الاستشاري	Approved as noted مع ملاحظات <input checked="" type="checkbox"/>	Approved معتمد <input type="checkbox"/>
1- Cormix H20 Stop shall be used only				
2- Consult "Cormix" for the optimum/maximum dosage, and submit for our approval				
3- Approval is subject to satisfactory results of trial mixes for strength, durability, workability and setting time.				
4- Usage, handling and storage must comply with manufacturer's recommendations				
Omar 22/12/2020				

For D.P.W. use only خاص بدائرة الأشغال	
Rejected مرفوض <input type="checkbox"/>	Approved معتمد <input type="checkbox"/>
توقيع مهندس الدائرة DPW Engineer sign	توقيع وختم الاستشاري Consultant sign & stamp
23/12/2020	23/12/2020
CONT. RECIEVED استلام المقاول	
Sign توقيع	
Date التاريخ	
ملاحظة: الإحتضار النهائي للمواد يكون بعد إحتضار دائرة الأشغال للمواد مع مبرر بالحدود القصوى لا يجوز تقديم أي ملاحظات مادية أو زمنية من قبل المقاول	
Note: Final D.P.W. approval will be after site mock up approval without any claim by contractor for any Cost / Time impact	





# PROJECT CASE STUDY

<b>PROJECT: (2B +G +5+R) RES. BLDG. AT JUMEIRAH VILLAGE TRIANGLE</b>	<b>NOV 2024</b>
<b>WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE</b>	

## PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used in substructure (Raft slab and retaining walls). Crystalline coating Contite Seal ACCI, Swellable bars and PVC waterstop was used for the Construction joints protection.



## PROJECT

(2B+G+5+R) Res. Bldg. At Jumeirah Village Triangle

## CLIENT

Axiom Investment Limited

## CONSULTANT

Datum Engineering Consultants

## CONTRACTOR


Modern Building Contracting LLC

## READYMIX SUPPLIER

Transgulf Readymix

## DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC

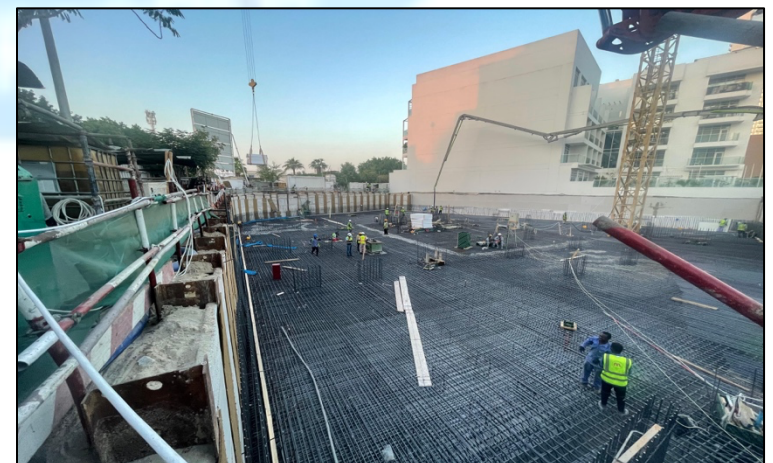





# PROJECT CASE STUDY

<b>PROJECT: PROPOSED RESIDENTIAL BUILDING (B+G+5F+R) AT JVC – DUBAI</b>	NOV 2024
<b>WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE</b>	

## PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used in substructure (Raft slab and retaining walls). Crystalline coating Contite Seal ACCI, Swellable bars and PVC waterstop was used for the Construction joints protection.

**NO EXTERNAL MEMBRANE USED**

**NO PROTECTION BOARDS USED**

**NO PROTECTION SCREED USED**

## PROJECT

Proposed Res Bldg. (B+G+5F+R) at JVC, Dubai

## CLIENT

IMAN Group Limited

## CONSULTANT

EMSQUARE Engineering Consultants

## CONTRACTOR




Ashiyana Contracting LLC

## READYMIX SUPPLIER

Readymix Gulf LLC / Oryx Mix LLC

## DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC

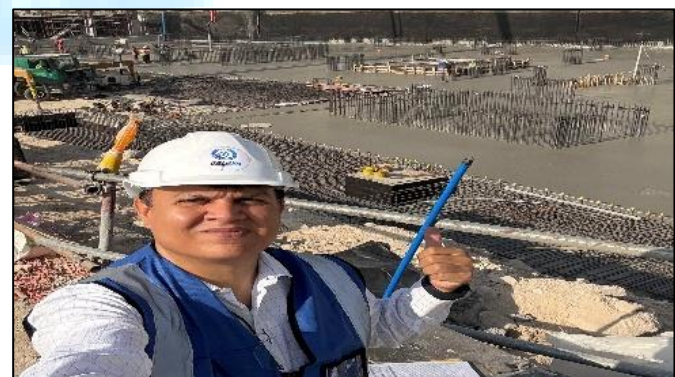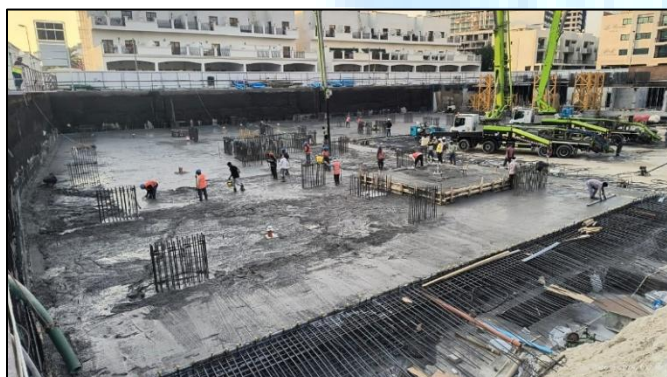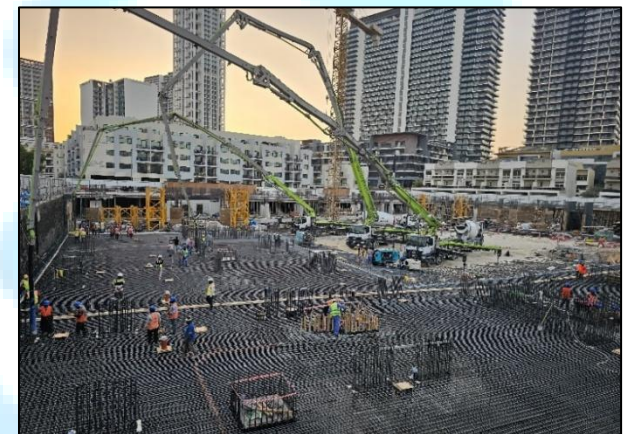





**GALAXY**  
SPECIALISED WATERPROOFING CO. LLC.

**CORMIX®**  
One step ahead

## PROJECT CASE STUDY

<b>PROJECT: ONE BY BINGHATTI TOWER (3B+G+2P+61+3M+2SG+R) IN BUSINESS BAY</b>	<b>NOV 2024</b>
<b>WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE</b>	

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used in substructure (Raft slab and retaining walls). Crystalline coating Contite Seal ACCI, Swellable bars and PVC waterstop was used for the Construction joints protection.

### PROJECT

One By Binghatti in Business Bay

### CLIENT

Binghatti Properties

### CONSULTANT

Silver Stone Engineering Consultants

### CONTRACTOR



Granada Europe Contracting

### READYMIX SUPPLIER

Unimix

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC

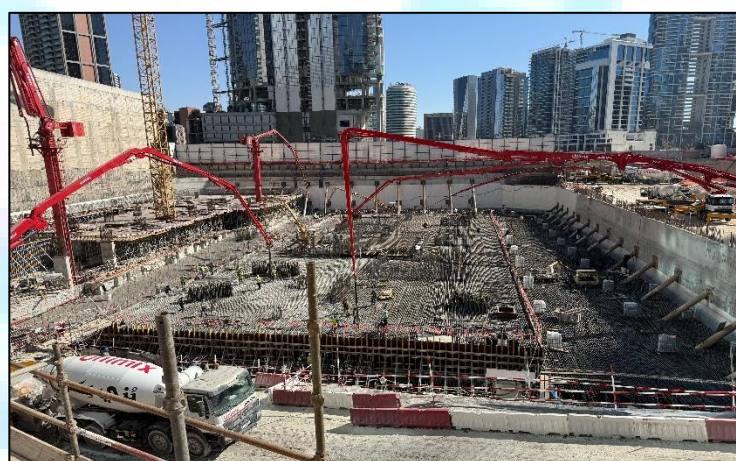





# PROJECT CASE STUDY

<b>PROJECT: (B+G+1) PRIVATE VILLA IN DUBAI SOUTH</b>	<b>NOV 2024</b>
<b>WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE</b>	

## PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used in substructure (Raft slab and retaining walls). Crystalline coating Contite Seal ACCI, Swellable bars and PVC waterstop was used for the Construction joints protection.

**NO EXTERNAL MEMBRANE USED**  
**NO PROTECTION BOARDS USED**  
**NO PROTECTION SCREED USED**

## PROJECT

(B+G+1) Private Villa In Dubai South  
Dubai, UAE

## CLIENT

Jia Yun Hu

## CONSULTANT

High Art Engineering Consultants

## CONTRACTOR

Epic City Contracting

## READYMIX SUPPLIER

Golden Ready Mix

## DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC





PROJECT: (B+G+1+R) PRIVATE VILLA AT JUMAIRAH BAY ISLANDS – DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE

FEB  
2024



### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used for the sub-structure. Crystalline coating Contite Seal ACCI, PVC Waterstop & Swellable was used for the Construction joints protection.



**NO EXTERNAL MEMBRANE USED**  
**NO PROTECTION BOARDS USED**  
**NO PROTECTION SCREED USED**

### PROJECT

Private Villa (B+G+1+R) at Jumairah Bay - Dubai

### CLIENT

Mr. Abdulmajid Abdulhamid Dhia Jafar

### CONSULTANT

Al Manhal Engineering Consultants (A.M.E.C.)

### CONTRACTOR

Plus Palace Contracting LLC

### READYMIX SUPPLIER

ReadyMix Beton

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC







PROJECT: (B+G+7) & (B+G+7) RESIDENTIAL & COMMERCIAL BLDGS. AT AI FURJAN – DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURES OF BOTH BLDGS.

JAN  
2024



### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used for the sub-structure. Crystalline coating Contite Seal ACCI, PVC Waterstop & Swellable was used for the Construction joints protection.

**NO EXTERNAL MEMBRANE USED**  
**NO PROTECTION BOARDS USED**  
**NO PROTECTION SCREED USED**



### PROJECT

Res. & Comm. Bldgs. (B+G+7) at Al Furjan, Dubai

### CLIENT

Deyaar

### CONSULTANT

Jouzy Engineering Consultants



### CONTRACTOR


New Systems Engg. Contracting LLC

### READYMIX SUPPLIER

Unimix

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO

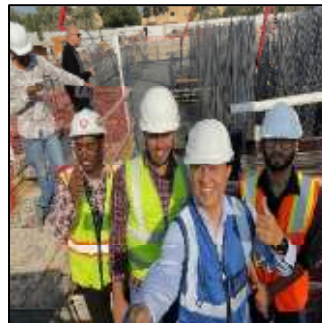



PROJECT: (B+G+1+R) PRIVATE VILLA AT AL BARSHA – DUBAI

DEC  
2023



WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used for the sub-structure. Crystalline coating Contite Seal ACCI, PVC Waterstop & Swellable was used for the Construction joints protection.

**NO EXTERNAL MEMBRANE USED**  
**NO PROTECTION BOARDS USED**  
**NO PROTECTION SCREED USED**



### PROJECT

Pvt Villa(B+G+1) at Al Barsha First

### CLIENT

Mr. Hary George

### CONSULTANT

Erga Progress Engg. Consultants

### CONTRACTOR

Edge Contracting LLC

### READYMIX SUPPLIER

Readymix Beton

### DISTRIBUTOR/APPLICATOR

Galaxy Specialised Waterproofing CO LLC







PROJECT: 2B+G+9 BLDG. AT WADI AL SAFA 3 - DUBAI

FEB  
2023

**CORMIX<sup>®</sup>**  
One step ahead

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP  
LIQUID USED IN THE SUB-STRUCTURE WITHOUT MEMBRANE

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used for the sub-structure. Crystalline coating Contite Seal ACCI&Swell bar waterstop was used for the Construction joints protection.

**NO EXTERNAL MEMBRANE USED**  
**NO PROTECTION BOARDS USED**

### PROJECT

Proposed Residential Building 2B+G+9 at  
Wadi al Safa 3, Dubai - UAE.

### CLIENT

Mr. Aschraf Mahmud

### CONSULTANT

Atrium Engineering Consultants

### CONTRACTOR


3D Constraction LLC

### READYMIX SUPPLIER

SS Lootah Readymix Concrete LLC

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC

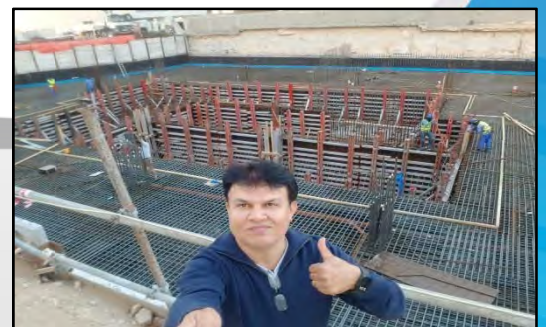





PROJECT: B+G+7+R BLDG. ATWADI AL SAFA 3 - DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE WITHOUT MEMBRANE

JAN  
2023

**CORMIX**  
One step ahead

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used for the sub-structure. Crystalline coating Contite Seal Construction joints protection.

**NO EXTERNAL MEMBRANE USED**

**NO PROTECTION BOARDS USED**

### PROJECT

Proposed Residential Building G+1P+10 at Wadi al Safa 3, Dubai - UAE.

### CLIENT

Mr Mahmoud Mohamad

### CONSULTANT

Islamic Architects Consulting Engineers

### CONTRACTOR

3D Construction LLC

### READYMIX SUPPLIER

Conmix LLC

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC







PROJECT: B+G+1 RESIDENTIAL VILLA AT PALM JUMEIRAH - DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE

OCT 2022



### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used for the sub-structure. Crystalline coating Contite Seal ACCI&SwellaBle was used for the

### PROJECT

Proposed B+G+1 Residential Villa at plot no. N-50, Palm Jumeirah, Dubai, UAE.

### CLIENT

Mr. Nasser Abdulla Mohd Bin Hafez Al Janah

### CONSULTANT

Al GurgEngineering Consultants

### CONTRACTOR



MCMContractingLLC

### READYMIX SUPPLIER

Al Ghurair Readymix LLC

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC

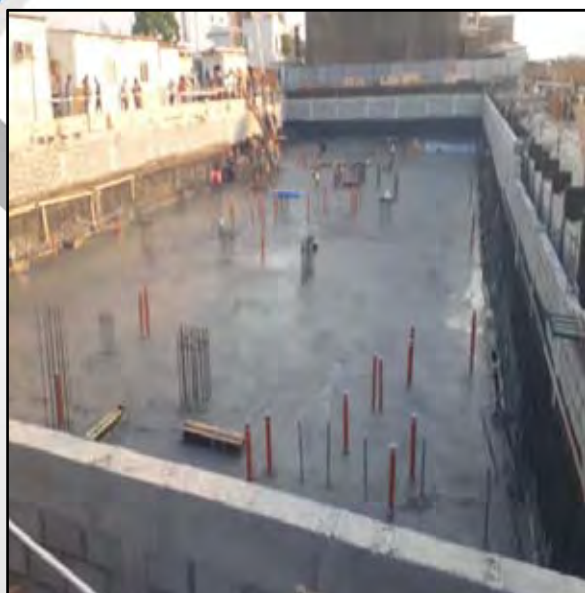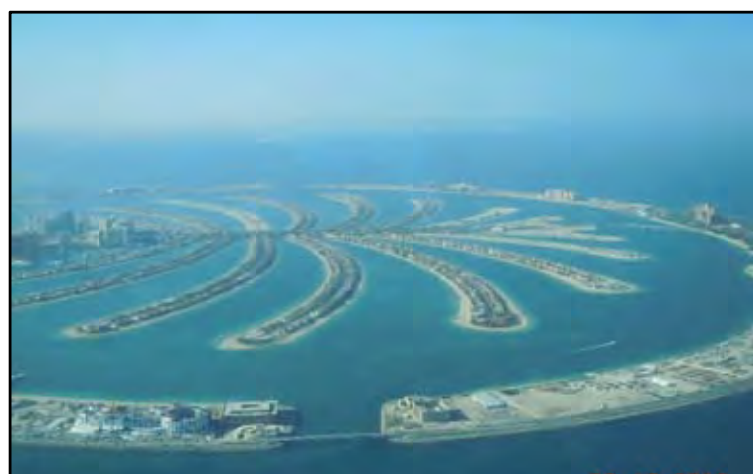





PROJECT: B+G+1 RESIDENTIAL VILLA AT JUMEIRAH - DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE

OCT  
2022

**CORMIX®**  
One step ahead

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used for the sub-structure. Crystalline coating Contite Seal ACCI&SwellaBle was used for the Construction joints protection.

**NO EXTERNAL MEMBRANE USED  
NO PROTECTION BOARDS USED**



### PROJECT

Proposed B+G+1 Residential Villa at Jumeirah 2nd, Dubai, UAE.

### CLIENT

Mr. Bandar Ahmed Alsadis

### CONSULTANT

Naqsh Engineering Consultants

### CONTRACTOR

Venus Contracting LLC

### READYMIX SUPPLIER

Al Ghurair Readymix LLC

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC







PROJECT: (B+G+5+R) PROPOSED RESIDENTIAL BLDG. AT JVC – DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE

OCT 2022

**CORMIX**  
One step ahead

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used for the sub-structure. Crystalline coating Contite Seal ACCI, PVC Waterstop & Swellable was used for the Construction joints protection.

**NO EXTERNAL MEMBRANE USED  
NO PROTECTION BOARDS USED**

### PROJECT

Proposed Res Bldg. (B+G+5+R) on plot at JVC, Dubai - UAE

### CLIENT

Iman Developers

### CONSULTANT

Federal Engineering Consultants

### CONTRACTOR


CJ Tec Contracting LLC

### READYMIX SUPPLIER

Conmix Limited

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC

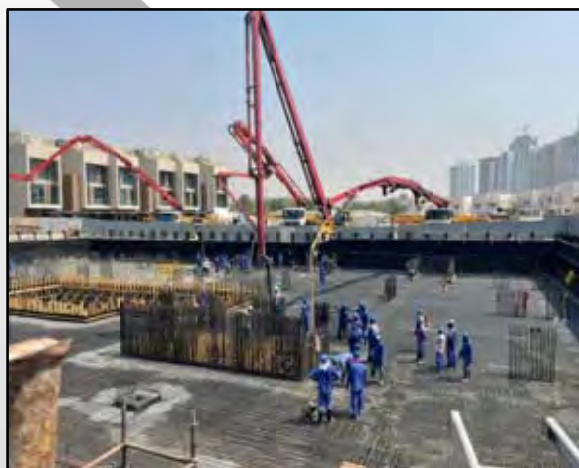





PROJECT: B+G+1 RESIDENTIAL VILLA AT EMERALD HILLS - DUBAI

SEPT  
2022

**CORMIX**  
One step ahead

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H<sub>2</sub>O STOP LIQUID USED IN THE SUB-STRUCTURE

### PRODUCT

stop liquid was used for the sub-structure. Crystalline coating Contite Seal ACCI, PVC waterstop and swell bar was used for the Construction joints protection.

### PROJECT

Proposed B+G+1 Residential Villa at Emerald Hills, Dubai, UAE.

### CLIENT

Mr. Yacine

### CONSULTANT

Eskan Engineering Consultant

### CONTRACTOR

CKC Building Contracting LLC

### READYMIX SUPPLIER

SS Iootah Readymix LLC

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC







PROJECT: B+G+1 RESIDENTIAL VILLA AT DUBAI HILLS - DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE WITHOUT MEMBRANE

AUG  
2022

**CORMIX®**  
One step ahead

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used for the sub-structure. Crystalline coating Contite Seal ACCI&PVC waterstop was used for the Construction joints protection.

**NO EXTERNAL MEMBRANE USED  
NO PROTECTION BOARDS USED**

### PROJECT

Proposed B+G+1 Residential Villa at plot no. 63110676, Dubai Hills, Dubai, UAE.

### CLIENT

Mr. Satish Sanpal

### CONSULTANT

Edmac Engineering Consultants

### CONTRACTOR

Chirag Contracting LLC

### READY MIX SUPPLIER

Al Ghurair Readymix LLC

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC







PROJECT: LUXURIOUS VILLA (B+G+1) AT EMIRATES HILLS,DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE CORMIX H2O STOP LIQUID IN THE SUBSTRUCTURE

AUG  
2022



### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used in substructure (Raft slab and retaining walls).

### PROJECT

Luxurious Villa (B+G+1) at Emirates Hills, Dubai - UAE.

### CLIENT

### CONSULTANT

Mr.Mustafa RawjiModelEngg. Consultants

### CONTRACTOR READYMIX SUPPLIER

Gmamco LLC.

ReadymixGulf Co. Ltd.

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC







PROJECT: LUXURIOUS VILLA (B+G+1) AT PEARL JUMEIRAH,  
DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE CORMIX H2O  
STOP LIQUID IN THE SUBSTRUCTURE WITHOUT MEMBRANES

AUG  
2022



### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used in substructure (Raft slab and retaining walls). Crystalline coating Contite Seal ACCI, Swellable bars and PVC waterstop was used for the Construction joints protection.

**NO EXTERNAL MEMBRANE USED**  
**NO PROTECTION BOARDS USED**

### PROJECT

Luxurious Villa (B+G+1) at Pearl Jumeirah, Dubai - UAE.

CLIENT      CONSULTANT

Mr. Stephene Raymond Al Ajmi Engg. Consultants

### CONTRACTOR READY MIX SUPPLIER

ProjecoCont. LLC SS Lootah Readymix

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC







PROJECT: B+G+1 RESIDENTIAL VILLA AT DUBAI HILLS - DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE WITHOUT MEMBRANE

AUG  
2022

**CORMIX®**  
One step ahead

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used for the sub-structure. Crystalline coating Contite Seal ACCI&PVC waterstop was used for the Construction joints protection.

**NO EXTERNAL MEMBRANE USED  
NO PROTECTION BOARDS USED**

### PROJECT

Proposed B+G+1 Residential Villa at plot no. 6317012, Dubai Hills, Dubai, UAE.

### CLIENT

Mr. Prakash Kumar Pranlal Doshi

### CONSULTANT

MD Bhatia & Bros Engineering Consultants

### CONTRACTOR


Al Maeraj Contracting LLC

### READY MIX SUPPLIER

Shafa Al Nahdah Readymix LLC

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC

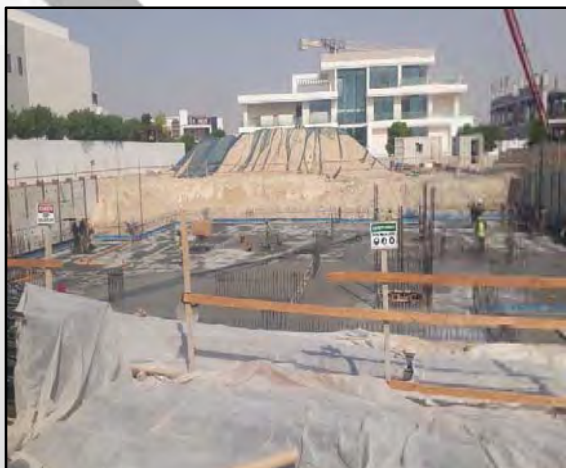





PROJECT: B+G+7+R BLDG. AT MAJAN, WADI AL SAFA - DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE WITHOUT MEMBRANE

JULY  
2022

**CORMIX**  
One step ahead

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used for the sub-structure. Crystalline coating Contite Seal ACCI&Swell bar waterstop was used for the Construction joints protection.

**NO EXTERNAL MEMBRANE USED  
NO PROTECTION BOARDS USED**

### PROJECT

Proposed Residential Building B+G+7+R at plot 645-7947, Majan (Wadi al Safa) Dubai, UAE.

### CLIENT

Madam Israa Adnan Hashem

### CONSULTANT

Noble Engineering Consultants

### CONTRACTOR

Ocean Drive Contracting LLC

### READYMIX SUPPLIER

Al Azzani Readymix LLC

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC







PROJECT: RES. VILLA B+G+1F+R AT UMM AMMARA - DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE CORMIX H2O STOP LIQUID USED IN THE SUB-STRUCTURE

JULY  
2022

**CORMIX**  
One step ahead

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used in the substructure (Raft slab and retaining walls). Crystalline & Corrosion resistant coating Cormix Contite Seal ACCI, Swellable bar and PVC waterstop was used for the Construction joints protection.



**NO EXTERNAL MEMBRANE USED.  
NO PROTECTION BOARDS USED.**

### PROJECT

Res. Villa B+G+1F+R at Meraas plots at Umm Ammara, Dubai – UAE

### CLIENT

Dalma Estates Limited

### CONSULTANT

Options Engineering Consultancies

### CONTRACTOR


Shuaa Al Madina Contracting LLC

### READYMIX SUPPLIER

Al Ghurair Readymix

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC

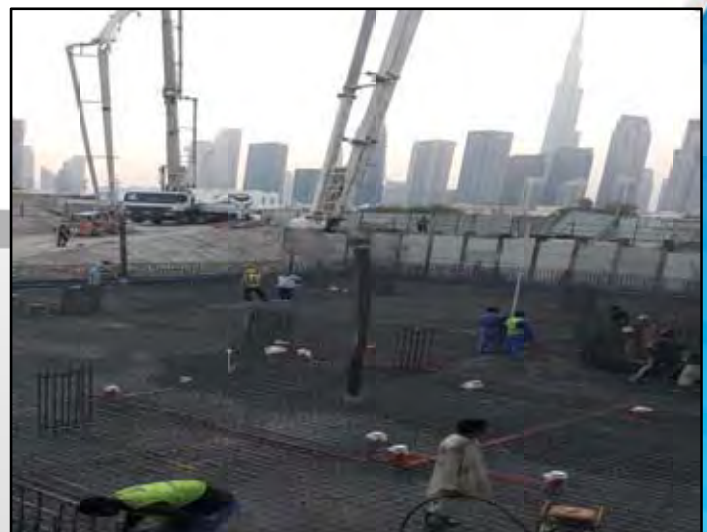





PROJECT: RES. BLDG B+G+M+1+R AT DEIRA - DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE CORMIX H2O STOP LIQUID USED IN THE SUB-STRUCTURE

JUNE  
2022

**CORMIX**  
One step ahead

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used in the substructure (Raft slab and retaining walls). Crystalline & Corrosion resistant coating Cormix Contite Seal ACCI & Swellable bar waterstop was used for the Construction joints protection.



**NO EXTERNAL MEMBRANE USED.  
NO PROTECTION BOARDS USED.**

### PROJECT

Res. Build B+G+M+1+R at Al Sabkha, Dubai – U.A.E.

### CLIENT

Ms. Hana Obaid Mohammad

### CONSULTANT

Federal Engineering Consultancy

### CONTRACTOR

Golden Wing Contracting LLC


### READYMIX SUPPLIER

SS Lootah Readymix



### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC

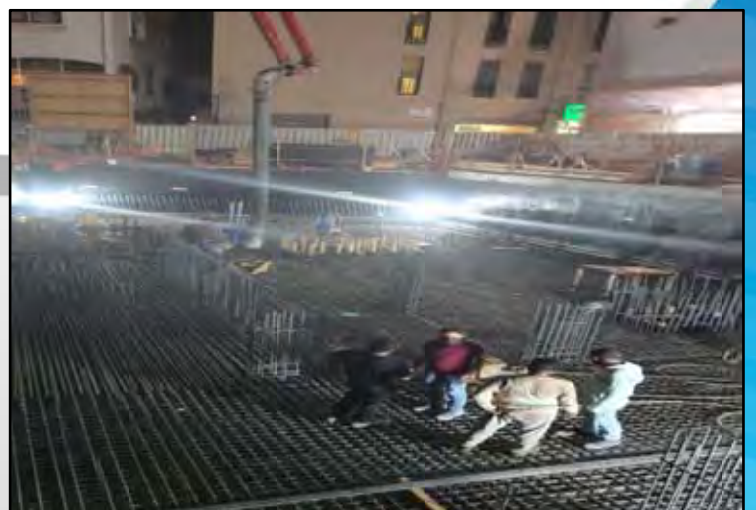





PROJECT: PRIVATE VILLA AT DUBAI HILLS, DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE CORMIX H2O STOP LIQUID USED IN THE SUB-STRUCTURE

MAY  
2022

**CORMIX®**  
One step ahead

### PRODUCT

DCL Certified Crystalline Admixture the substructure (Raft slab and retaining walls). Crystalline & Corrosion resistant coating Cormix Contite Seal ACCI, Metal & Swellable bar waterstop was used for the Construction joints protection. **NO EXTERNAL MEMBRANE USED. NO PROTECTION BOARDS USED**

### PROJECT

Private Villa at Dubai Hills, Dubai - UAE.

### CLIENT

Dubai Hills Estate LLC

### CONSULTANT

Al AjmiEngg. Consultants

### CONTRACTOR

Edge-SCM Bldg Contracting LLC

### READYMIX SUPPLIER

Ready Mix Beton LLC

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC







PROJECT: RESIDENTIAL VILLA (B+G+1+R) AT AL MERKHAD  
(MBR CITY), DUBAI – U.A.E.

APR  
2022

**CORMIX**  
One step ahead

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE CORMIX H2O  
STOP LIQUID IN THE SUBSTRUCTURE

### PRODUCT

DCL Certified Crystalline Admixture  
Cormix H2O stop liquid was used in  
substructure (Raft slab and retaining  
walls).

### PROJECT

Proposed (B+G+1+R) Residential Villa at Al  
Merkadh (MBR City), Dubai - UAE.

### CLIENT

Mr. Muhammad Owais Rafiq Adam

### CONSULTANT

Model Engg. Consultants

### CONTRACTOR

City Nights Contracting LLC

### READYMIX SUPPLIER

Cemex Topmix LLC

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC





PROJECT: B+G+3P+16 HOTEL APARTMENT AT JVC, DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE CORMIX H2O STOP LIQUID IN THE SHELL OF ROOF TOP SWIMMING POOL

MAR  
2022

**CORMIX**  
One stop solution

#### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used in the shell of a roof top swimming pool.

#### PROJECT

B+G+3P+16 Hotel Apartment at JVC, Dubai - UAE.

#### CLIENT

Platinum Tower Limited

#### CONSULTANT

Edmac Engg. Consultants

#### CONTRACTOR

Nantong Const. GRP

#### READYMIX SUPPLIER

Transgulf Readymix

#### DISTRIBUTION / APPLICATOR

Galaxy Specialised Waterproofing CO LLC







PROJECT: LUXURIOUS VILLA (B+G+1) AT PEARL JUMEIRAH, DUBAI

MAR  
2022

**CORMIX**  
One step ahead

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE CORMIX H2O STOP LIQUID IN THE SUBSTRUCTURE WITHOUT MEMBRANES

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used in substructure (Raft slab and retaining walls). Crystalline coating Contite Seal ACCI, Swellable bars and PVC waterstop was used for the Construction joints protection.



**NO EXTERNAL MEMBRANE USED**  
**NO PROTECTION BOARDS USED**

### PROJECT

Luxurious Villa (B+G+1) at Pearl Jumeirah, Dubai - UAE.

### CLIENT

Mr. Louay Sami Saleh

### CONSULTANT

Al Ajmi Engg. Consultants

### CONTRACTOR

Projecto Cont. LLC

### READYMIX SUPPLIER

SS Lootah Readymix

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC





PROJECT: ROSEHILLS GARDENS (G+5) AT DUBAI HILLS, DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE CORMIX H2O STOP LIQUID IN THE WATER TANK WALLS AND TOP SLAB

NOV  
2021

**CORMIX**  
One step ahead

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O walls and top slab.  
Crystalline coating CormixContite Seal ACCI, CormixConplug & Swellable bar waterstop was used for the Construction joints protection.

### PROJECT

Rosehill Gardens Phase 1, (G+5) on Plot no 3331429 at Al Bada, Dubai - UAE.

### CLIENT

Rosehill Gardens Estate LLC

### CONSULTANT

MAKS Engineering Consultants

### CONTRACTOR

Kamal Khawajah Building Cont. LLC

### READYMIX SUPPLIER

SS Lootah Readymix

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC







PROJECT: B+G+6+2R BUILDING, AL QUSAIS 2<sup>ND</sup>, DUBAI - UAE

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE WITHOUT MEMBRANE

SEPT  
2021

**CORMIX**  
One step ahead

### PRODUCT

stop liquid was used for the sub-structure

**NO EXTERNAL MEMBRANE / NO PROTECTION  
BOARDS USED**

Crystalline coating Contite Seal ACCI&Swellable bar waterstop was used for the Construction joints protection.

### PROJECT

B+G+6+2R Building at plot no. 2330123, Al Qusais 2nd, Dubai - UAE.

### CLIENT

Mr. Sultan Mohamed Sultan Al Ghazal AlShamsi

### CONSULTANT

M/s Design Centre

### CONTRACTOR

M/S Majal Contracting Company LLC

### READYMIX SUPPLIER

National Lootah Readymix LLC

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC





PROJECT: B+G+3+HC+R BUILDING AT AL QUOZE - DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUB-STRUCTURE WITHOUT MEMBRANE

AUG  
2021

**CORMIX**  
One step ahead

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used for the sub-structure  
**NO EXTERNAL MEMBRANE / NO PROTECTION BOARDS USED**

Crystalline coating Contite Seal ACCI&Metal waterstop was used for the Construction joints protection.

### PROJECT

B+G+3+HC+R Building at plot no. 358-7191, Al QuozeThird, DUBAI, UAE.

### CLIENT

Mr. Mahmood Mohammad Mahammad Al Dallal  
Ahmad Mohammad Mahmood Al Dallal

### CONSULTANT

Islamic Architects Consulting Engineers

### CONTRACTOR

3D ConstractionLLC

### READYMIX SUPPLIER

Al AzzaniReadymix LLC

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC







PROJECT: LUXURIOUS VILLA (B+G+1) AT AL WASL, DUBAI

APRIL  
2021

**CORMIX**  
One step ahead

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE CORMIX H2O STOP LIQUID IN THE SUBSTRUCTURE WITHOUT MEMBRANES

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used in substructure (Raft slab and retaining walls)

**NO EXTERNAL MEMBRANE / NO PROTECTION BOARDS USED**

Crystalline coating Contite Seal ACCI, Conplug, Swellable barsand Metal waterstop was used for the Construction joints protection.

### PROJECT

Luxurious Residential Villa B+G+1 at Al Wasl, Dubai

### CLIENT

Ms Amna Mohammed Ahmed Khalaf Alotaiba

### CONSULTANT

Al Ajmi Engg. Consultants

### CONTRACTOR

Projeco Contracting LLC

### READYMIX SUPPLIER

SS Lootah Readymix

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC





PROJECT: PRIVATE LUXURIOUS VILLA (B+G+1) AT EMIRATES HILLS, DUBAI

MAR  
2021

**CORMIX**  
One step ahead

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE BASEMENT

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used in the basement

### PROJECT

Proposed B+G+1 Private Luxurious Villa on plot no E-167 at Emirates Hills, Dubai.

### CLIENT

Mr. Lakhani

### CONSULTANT

Model Engineering Consultants

### CONTRACTOR

Vision Tech Ideal Contracting LLC

### READYMIX SUPPLIER

Conmix

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC







PROJECT: PRIVATE VILLA (B+G+1) AT NAD AL SHEBA, DUBAI

MAR  
2021

**CORMIX®**  
One step ahead

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE BASEMENT WITHOUT MEMBRANE

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used for the sub-structure (Raft slab, lift pit, sum pit, retaining wall)

**NO EXTERNAL MEMBRANE / NO PROTECTION BOARDS USED**

Crystalline coating Contite Seal ACCI, Conplug, Swellable bars & PVC external waterstop were used for the Construction joints protection.

### PROJECT

Proposed B+G+1 Private Villa on plot no 6159752 at Nad Al Sheba 2, Dubai.

### CLIENT

Mr. Ibrahim Al Sayed Mohd Hussain Sharaf

### CONSULTANT

+971 Architects

### CONTRACTOR

Builttec Contracting LLC

### READYMIX SUPPLIER

Modern Concrete Products Factory (Modern Mix)

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC





PROJECT:PRIVATE SHCHOOL AT MALEEHA, SHARJAH

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE UG WATER TANKS / HOLDING TANK

DEC  
2020

**CORMIX**  
One step ahead

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used for underground water tanks and holding tank

### PROJECT

Private School on plot # 316 at Tawi Hamdeh, Maleeha, Shariah

### CLIENT

Government of Sharjah - Department of Public Works

### CONSULTANT

QHC Engineering Consultants

### CONTRACTOR


Darwish Engineering Emirates

### READYMIX SUPPLIER

Safemix

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC

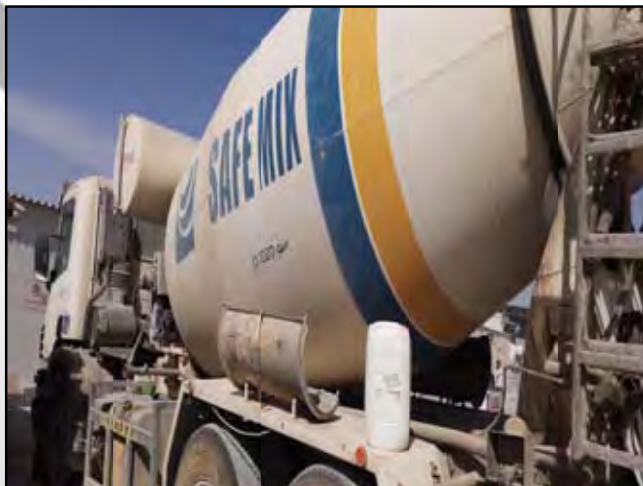





PROJECT: MARINA TOWER, 2B+G+24+ 1R, DUBAI MARINA – DUBAI, U.A.E.

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN SWIMMING POOL SHELL & DECK SLAB

SEPT  
2020

**CORMIX**  
One step ahead

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O stop liquid was used in swimming pool shell and deck slab for double protection

### PROJECT

2B+G+24+ 1R Blockat Dubai Marina, Dubai – U.A.E

### CLIENT

ALMULLAGroup of trading companies & Est.

### CONSULTANT

DXB Design Studio Consultants

### CONTRACTOR

Modern Executive Systems Cont. (MESOC)

### READYMIX SUPPLIER

SS Lootah Readymix Concrete LLC

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC





PROJECT:(B+G+1) LUXURIOUS VILLA, AL MIZHAR 2 - DUBAI

WORK DESCRIPTION: CRYSTALLINE ADMIXTURE H2O STOP LIQUID USED IN THE SUBSTRUCTURE WITHOUT MEMBRANES

JULY  
2020

**CORMIX**  
One step ahead

### PRODUCT

DCL Certified Crystalline Admixture Cormix H2O (Raft slab and retaining walls)

**NO EXTERNAL MEMBRANE / NO PROTECTION BOARDS USED**

Crystalline coating Contite Seal ACCI, Conplug, Swellable bars& PVC external waterstop was used for the Construction joints protection.

### PROJECT

(B+G+1) Villa at Al Mizhar, Dubai – U.A.E

### CLIENT

Mr. Salah Mohd Ali JumaBufarroosha Al Falasi

### CONSULTANT

Scale Architectural Engineering Consultancy

### CONTRACTOR

Khoory Hill Building & Contracting

### READYMIX SUPPLIER

SS Lootah Readymix Concrete LLC

### DISTRIBUTOR / APPLICATOR

Galaxy Specialised Waterproofing CO LLC

