

WASLR-4FT-2L-NL

LED ECONOMY WRAP-AROUND FIXTURES




Customer Name: _____

Project Name: _____

Note: _____

Type: _____

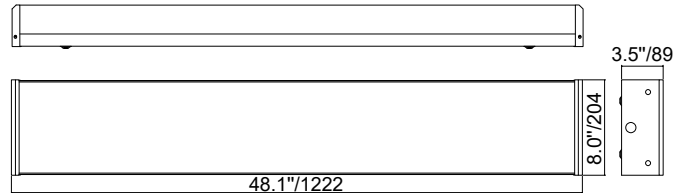

LED-Ready 4FT 2-Lamp Wrap fixture designed for energy-efficient lighting solutions. This wraparound fixture accommodates two LED T8 lamps (sold separately) and is constructed with a durable steel housing and a frosted acrylic lens for uniform light distribution. Ideal for commercial, industrial, and residential applications including offices, schools, utility rooms, and corridors. Lamps are not included, allowing users the flexibility to choose their preferred wattage, color temperature, and lumen output.

8"(D) x 48.1"(W) x 3.5"(H)

Features

- Housing: Die-formed Cold Rolled Steel With Powder Coated White
- Lens: Polycarbonate Lens
- Installation: Ceiling-Mounted

Technical Specifications

Mechanical:

- White Finish
- Housing: Die-formed Cold Rolled Steel With Powder Coated White
- Installation: Ceiling-Mounted
- Operating temperature: -22°F~104°F
- 5-Year Warranty


Applications:

- Ideal for commercial, industrial, and residential settings such as offices, schools, retail spaces, corridors, utility rooms, and storage areas. Designed to provide efficient general lighting with the flexibility to pair with user-selected LED T8 lamps.




Compatible Lamps:


T8-EZ6-GS-4FT-18W-F

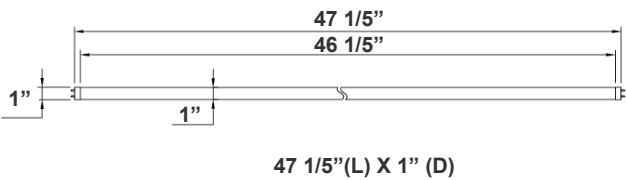


T8-EZ6-GS-4FT-18W-C

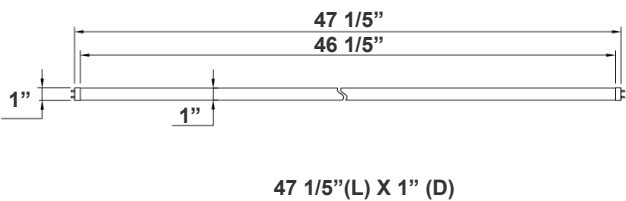

T8-EZ6-GS-4FT-15W-F

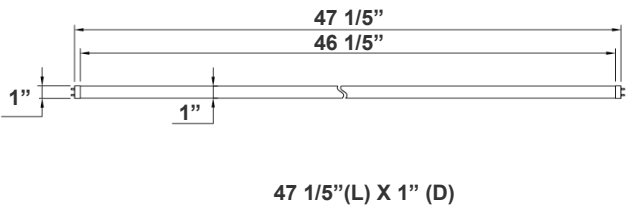

T8-EZ6-GS-4FT-15W-C

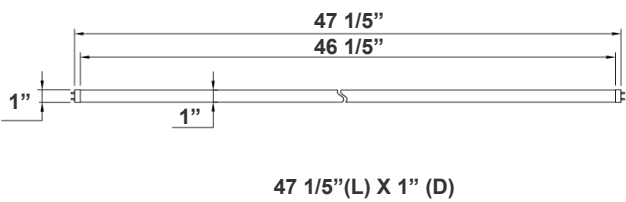

Operation Instructions

IMPORTANT

- IMPORTANT: READ ALL INSTRUCTIONS BEFORE THE INSTALLATION.
- WARNING: RISK OF FIRE OR ELECTRIC SHOCK. THE INSTALLATION SHOULD BE PERFORMED ONLY BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH THE NATIONAL ELECTRICAL CODE AND RELEVANT LOCAL CODES. THIS PRODUCT MUST BE INSTALLED IN FULL ACCORDANCE WITH APPLICABLE ELECTRICAL AND BUILDING CODES.
- TO PREVENT ELECTRICAL SHOCK, MAKE SURE TO TURN OFF MAINPOWER SWITCH PRIOR TO THE INSTALLATION.
- ENSURE THAT THE AMBIENT TEMPERATURES ARE WITHIN THE LUMINAIRE'S RATED LIMITS.



WARNING & SAFETY

INSTALLATION

ALWAYS TURN OFF THE POWER SUPPLY FROM MAIN CIRCUIT BREAKER FIRST!

1. CAREFULLY REMOVE THE PRISMATIC LENS AND WIRE COVER FROM THE LUMINAIRE.
2. USE THE LUMINAIRE AS A TEMPLATE BY PLACING IT ON THE JUNCTION BOX AND PENCILING IN THE FOUR HOLE POSITIONS. PUT THE LUMINAIRE ASIDE AND DRILL THE FOUR HOLES. INSERT AN ANCHORING BOLT (NOT INCLUDED) INTO EACH HOLE (SEE FIG. 1)
3. SECURE THE LUMINAIRE INTO PLACE WITH THE HELP OF MOUNTING SCREWS (NOT INCLUDED) ENSURING TO PASS THE JUNCTION BOX CABLES ON THE INSIDE OF THE LUMINAIRE.
4. CONNECT LUMINAIRE WIRES TO JUNCTION BOX WIRES (WIRE CONNECTORS NOT INCLUDED) AS FOLLOWS: GROUND WIRE TO FIXTURE'S NEUTRAL WIRE.
5. SECURE THE WIRE COVER ON THE FIXTURE HOUSING. MAKE SURE THE WIRES ARE BEHIND THE COVER.
6. INSTALL THE LAMP OR LAMPS IN THE LUMINAIRE.
7. INSTALL THE PRISMATIC LENS ON THE LUMINAIRE.
8. TURN ON THE LUMINAIRE.

