

Pure cutting performance!

The ZMG series

Model	Cutting width	Side shift (optional)	Number of blades	Weight	Power requirement	Dimensions	
						Width	Depth
ZMG 120	120 cm	---	3	375 kg	22 hp	125 cm	115 cm
ZMG 160	160 cm	15 + 15 cm	3	415 kg	24 hp	165 cm	115 cm
ZMG 180	180 cm	15 + 15 cm	3	435 kg	30 hp	185 cm	115 cm
ZMG 210	210 cm	15 + 15 cm	3	475 kg	35 hp	215 cm	135 cm
ZMG 220	220 cm	15 + 15 cm	3	485 kg	37 hp	225 cm	140 cm
ZMG 230	230 cm	15 + 15 cm	3	505 kg	40 hp	235 cm	135 cm
ZMG 240	240 cm	15 + 15 cm	3	505 kg	43 hp	245 cm	140 cm
ZMG 260	260 cm	15 + 15 cm	3	530 kg	47 hp	265 cm	140 cm
ZMG 280	280 cm	15 + 15 cm	3	560 kg	50 hp	285 cm	140 cm


Reliable technology!
Robust angular gears, indirect drive of the blades via V-belt and protective labyrinth seal of the blade bearings

Universal three-point frame!
Front-rear mounting (cat. I+II) or with trailer hitch for sprayers - everything is possible

Ideal ground hugging
thanks to three-point suspension with integrated float position

Uncompromising!
Enormous cutting performance, extreme blade overcut, high travel speed, even at extreme speed conditions

Intelligent, solid construction!
Compact, weight-optimized and extremely reliable thanks to high-strength steels and quality components

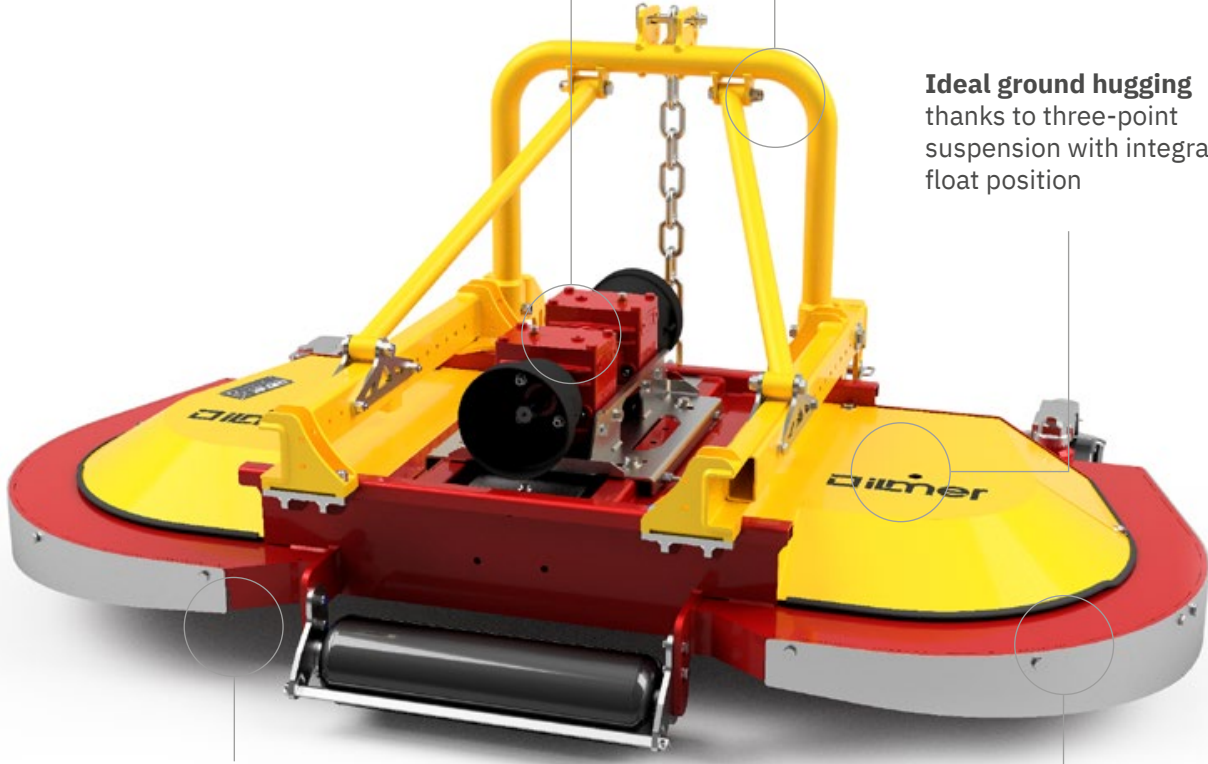


Mulch-spray combination
The special frame optimally transfers the load of the trailer drawbar to the tractor, while the rotary mower can move freely.



Pure cutting performance!
More grass throughput, extreme blade overcut for maximum cutting performance at high speeds.



Selectable grass discharge
The grass discharge can be selected to be either evenly behind the rotary mower (see illustration) or on both sides of the understock-area.



This is how maintenance is fun
Simply incline the gear plate with two setting screws and the V-belts are retightened.