




BLUE STAR



PACKAGED ACs AND DUCTED SPLITS  
NOTHING COMES CLOSE TO THEIR COOLING.  
OR THEIR WIDE RANGE.



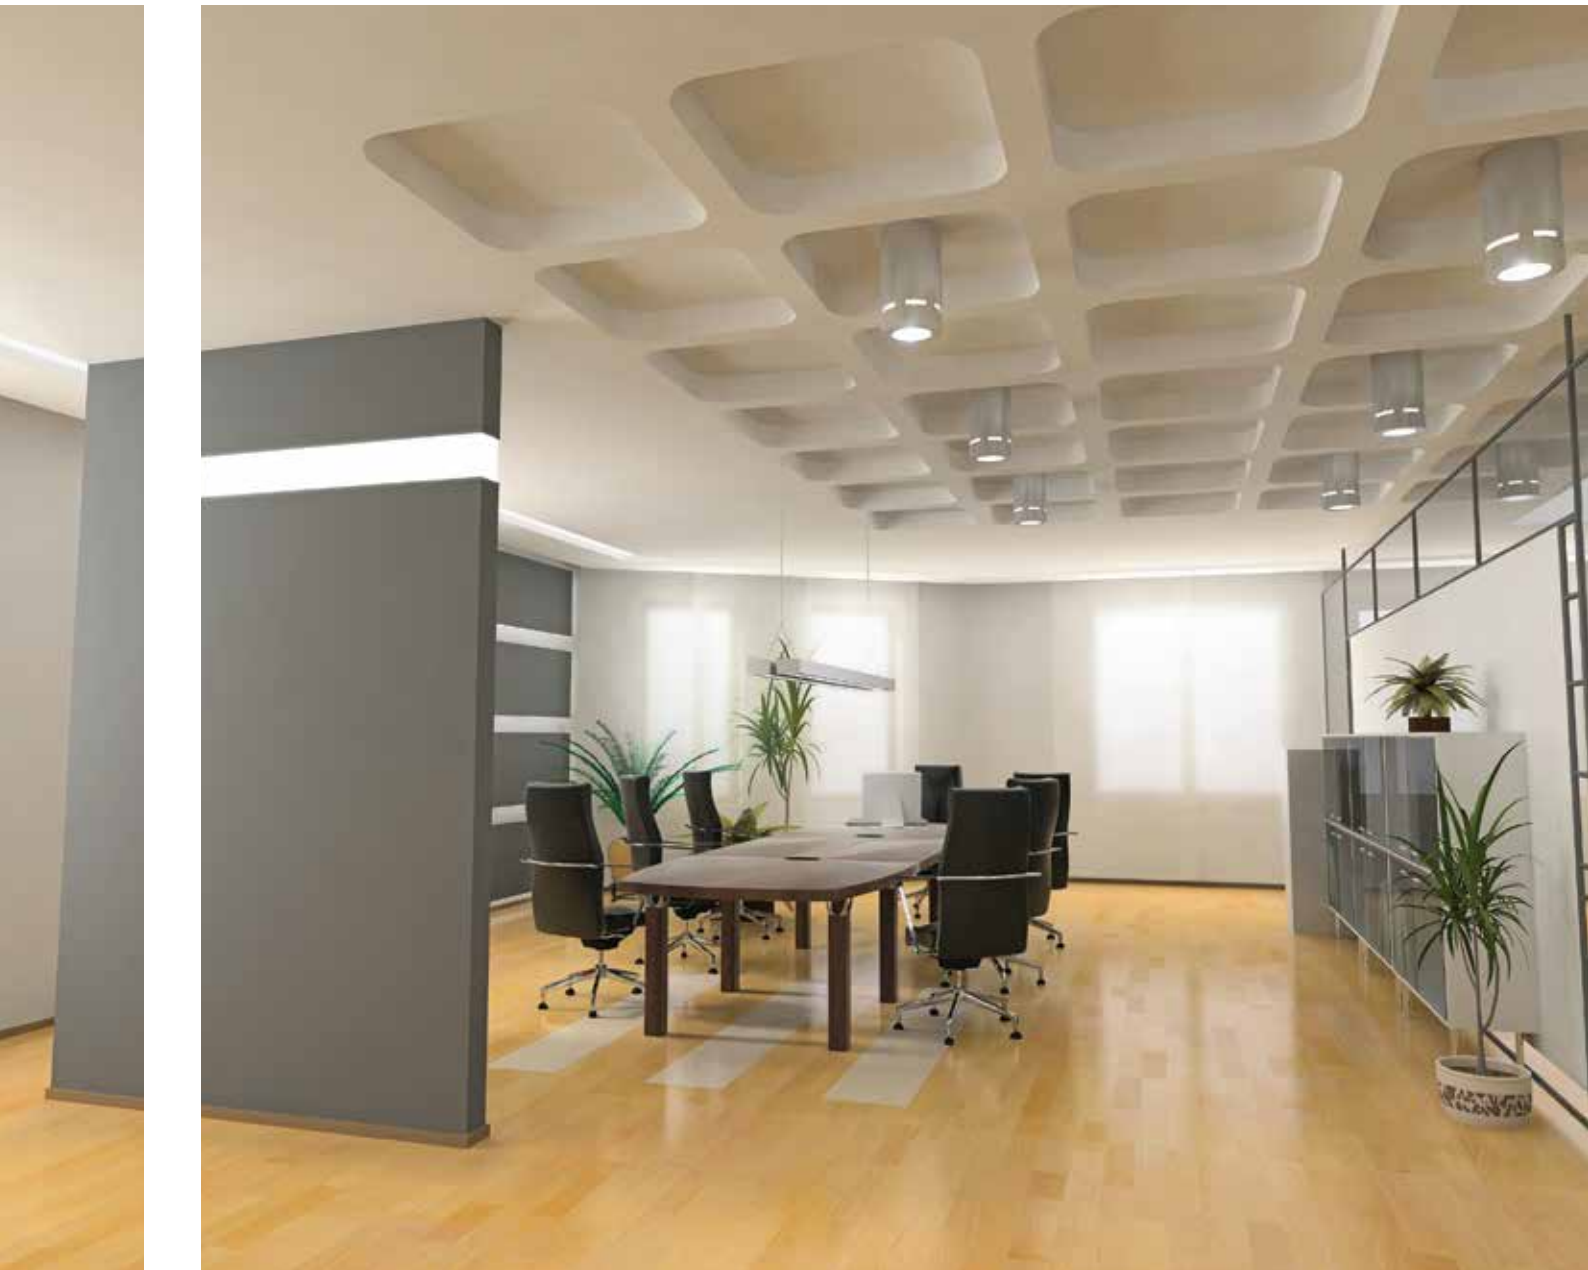

With more than seven decades of experience in air conditioning, over a million tons installed and over 500 trained and dedicated dealers across the country, Blue Star has been the undisputed market leader in ducted systems, in India.

Blue Star's leadership has not been limited to sales, service, reach and range alone. The company has driven major technological innovations in the field, resulting in unique products being introduced into the market over the past decades.

Blue Star was the first to introduce scroll technology into ducted systems over a decade ago. Then came the HiSen and HiPer Packaged ACs which were designed to cater specifically to high sensible heat and high ambient applications such as IT Parks and server banks. Blue Star also pioneered the HiPer Green Packaged unit for use in green building applications.

Blue Star has wide range of air cooled and water cooled floor/ceiling mounted ductable ACs with various refrigerant options to suit customer needs.

## SALIENT FEATURES



Highly efficient units with scroll compressors



Designed to work effectively even in ambient temperatures, as high as 50°C



Compatible with R410A eco-friendly refrigerant



Robust and reliable



Aesthetically superior



Service-friendly design

## THE DUCTED SYSTEMS RANGE

### Air Cooled Packaged ACs

Blue Star is a pioneer in the manufacturing of floor-mounted Packaged ACs for over three decades now. These systems are popular in commercial applications due to their distinct advantages of service-friendliness and extended ducting capabilities.

In this range, the floor-mounted indoor unit houses the DIDW blower, coil, filters and compressor, while the outdoor unit houses the high-efficiency condenser and new-design propeller fan. The strategic design, which places the compressors in the proximity of the evaporator in the indoor unit, further enhances the efficiency of this system.



### Water Cooled Packaged ACs

Where water is available in plenty, Blue Star's water cooled Packaged ACs offer higher efficiency than air cooled systems since water is a superior cooling medium compared to air. These systems come pre-charged and the unit comprises of the filter, blower, evaporator, compressor and water cooled condenser. These water cooled systems offer both higher efficiency as well as lower power consumption compared to air cooled systems.



### Air Cooled Ductable Splits

Where floor space is scarce but the AC unit can be housed above the false ceiling, ducted splits are the best choice. The indoor unit houses the evaporator, DIDW blower and filter in a compact powder-coated sheet metal unit, while the outdoor unit houses the compressor, the condenser and the new-design propeller fan.



### Water Cooled Ductable Split Units:

It is one more innovation by Blue Star. Water cooled ducted units are very much suitable for shopping malls, office complex, serviced apartments, industrial air conditioning, any application with multiple tenants. The advantages are:



1. Independent control and power billing in multi tenant premises.
2. Units can be mounted within the tenant's place.
3. Investment can be in phased manner, no need to lock capital.
4. Aesthetically better as outdoor unit is not exposed unlike air cooled systems. Also refrigerant pipe limitation is overcome as condensing unit need not be kept in open space and can be mounted near IDU within the building.





5. New DSW-mini series units are available in smaller capacities: 1 TR, 1.5 TR, 2 TR, 2.5 TR.









# PRODUCT LINE-UP

## Air Cooled

Appearance	Type	4.3 TR	6 TR	9 TR	12 TR	18 TR	24 TR
	Air Cooled Packaged Air Conditioners with R410A		■	■	■	■	■
	Air Cooled Ducted Split Air Conditioners with R410A	■	■	■	■	■	■

Appearance	Type	3 TR	5.5 TR	8.5 TR	8.75 TR	11 TR	16.5 TR	22 TR
	Air Cooled Ducted Split Air Conditioners with R22	■	■	■	■	■	■	■
	Air Cooled Ducted Split Air Conditioners with R407C	■	■	■	■	■	■	■
	Air Cooled Packaged Air conditioners with R22		■		■	■	■	■
	Air Cooled Packaged Air conditioners with R407C		■		■	■	■	■

## Water Cooled


Appearance	Type	1 TR	1.5 TR	2 TR	2.5 TR	3 TR	5.5 TR	8.75 TR	11 TR	16.5 TR
	DSW - Mini Series Condensing Unit with R410A	■	■	■	■					
DSW - Mini series - Indoor Units										
	Hi-Wall	■	■	■						
	Cassette		■	■	■					
	Concealed Type	■	■	■	■					
	Ducted Split Air Conditioner with R22 & 407C					■	■	■	■	
	Packaged Air Conditioners with R22 & 407C						■		■	■

# FEATURES

50°C

## Operation at Higher Ambients

The condenser in this new series of ducted systems is designed to operate effectively at higher ambient temperatures, up to 50°C. ensuring efficient cooling even in the harsh summer months, without tripping.



## Lower Noise Levels

The outdoor units of these ducted systems are fitted with bird-wing design, high-efficiency fans. This lowers noise levels significantly.



## Lower Running Cost

The high-efficiency fan used in these systems are specially designed blades that offer better air flow. This, along with more coil face area, helps in reducing the condensing temperature, and thereby lowering power consumption and running cost.



## Service-friendly Design

The design of the outdoor unit in the ducted systems range is such that it offers easy access to the compressors and the control panel on the side. And the fan motor assembly on the front panel is easily removable for repair. The condenser coil is much easier to clean.



## Scroll Compressor-driven

Due to their inherent design characteristics, scroll compressors have very high volumetric efficiency. They are ideal for air conditioning applications where the compression ratio is not very high. All Blue Star Packaged ACs and Ducted Splits use scroll compressors.



## Intelligent Microprocessor Controller

All units are controlled by microprocessor-based controllers with the following features:

- Seven-segment LCD display
- Auto restart after power failure
- Fault display
- Run-time equalisation
- Non volatile memory
- Touch-key on/off switch
- Single-phasing and phase reversal protection
- Time delay for compressor operation
- Accurate temp. control +/- 1°C
- Provision for fire alarm input



## Blue Fin Condenser and Corrosion-resistant Body

All units have special blue fins and are made of galvanised sheets, which are powder-coated after fabrication, making them corrosion-resistant while looking elegant, improving overall life of the system.



## Wide Voltage Range of Operation

The ducted systems can function across a wide voltage range of 360-440V, making them a rare breed.



Wide voltage range



#### Multi-compressor Advantage

Most of these ducted systems use more than one compressor. This gives them the advantage of high part-load efficiencies, since the entire evaporator surface is available to the system even during part-load conditions.



#### Run-time Equalisation

The intelligent controller ensures that all compressors (in multi-compressor units) run for equal number of hours, thus ensuring equal wear.



#### Hydrophilic Coating

The aluminium fins used on the evaporator coil have a hydrophilic coating. This coating helps retain the moisture on the fins from where they drain to the bottom by gravity. This helps reduce the moisture carry-over with the supply air.



#### EPE Insulation

The evaporator section of the indoor unit is insulated using fire-retardant EPE insulation. This reduces loss of cooling.




#### DIDW Blower Design

These systems use advanced DIDW type centrifugal blowers with forward curved blades, which offer higher air throw.



#### Efficient Air Filters

Air filters made of non-woven polyester media enclosed in HDPE mesh are provided. These are efficient and can be cleaned easily.

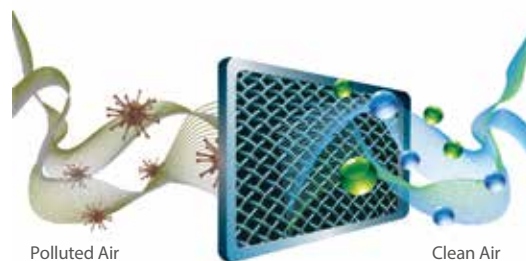



## ADVANTAGE BLUE STAR

### **Seven Decades of Expertise**

Blue Star with over 7 decades of experience in air-conditioning field is the undisputed market leader in ducted systems.

### **State of the art Production Facilities**

Blue has 7 world-class manufacturing facilities across the country to produce various HVAC products starting from small room ACs to big Chillers. These factories are equipped with the latest automated machine tools, experienced engineers and quality control system. Blue Star has an experienced R&D team to develop world class products for its customers.

### **Cooling Solutions Made Easy**

Blue Star's engineers offer right optimal air-conditioning solutions for various air-conditioning needs of customers. It starts from cooling load calculations to well designed air-distribution systems and equipment layouts before starting the project.

### **Superior Project Management**

Air-conditioning of commercial spaces require meticulous planning and timely execution as it involves coordination with architects, interior designers, consultants and various other professional agencies. Blue Star with its well trained dealers offer solution for quality and timely execution of air-conditioning projects for various applications.

### **After Sales Support**

Blue Star provides after sales service through offices spread across 17 cities. There is a network of well trained dealers across the country to take care of customers' service needs. With well networked and well trained service personal able to reach customer place with very short notice period, customers can enjoy air-conditioning without any interruption.



## Air Cooled Ducted Split Air Conditioners - R1/R2 Series

DESCRIPTION	UNITS	DSA361R1/R2	DSA661R1/R2	DSA1021R1/R2	DSA1052R1/R2	DSA1322R1/R2	DSA1321R1/R2	DSA1982R1/R2	DSA2642R1/R2
Nominal Cooling Capacity	TR	3.0	5.5	8.5	8.75	11.0	11.0	16.5	22.0
	Btu/Hr	36,000	66,000	1,02,000	1,05,000	1,32,000	1,32,000	1,98,000	2,64,000
	Kcal/Hr	9,072	16,632	25,704	26,460	33,264	33,264	49,900	66,528
Refrigerant		R1 Series: R 22 ; R2 Series: R 407C							
Power Supply		380/420 V, 3 PH., 50HZ, AC							
External Finish		Pure Polyester Powder Coated GI Steel Housing							
<b>Indoor Unit</b>		DSA361R1-IA/R2-I	DSA661R1/R2-IA	DSA1021R1/R2-IA	DSA1052R1/R2-IA	DSA1322R1/R2-IA	DSA1321R1/R2-IA	DSA1982R1/R2-IA	DSA2642R1/R2-IA
Dimensions	W X D X H (mm)	950 X 575 X 380	1175 X 635 X 460	1500 X 635 X 460	1500 X 635 X 460	1860 X 635 X 460	1860 X 635 X 460	2035 X 1085 X 550	2135 X 1215 X 690
Power Supply		380/420 V, 3 PH., 50HZ, AC Supply							
Type of Blower		Centrifugal Forward Curved, Double Inlet, Double Width							
Nominal Air Flow	CMH	2040	3740	5780	5950	7480	7480	11560	14940
	CFM	1200	2200	3400	3500	4400	4400	6800	8800
Capacity Control		0,100%	0,100%	0,100%	0,50%,100%	0,50%,100%	0,100%	0,33%, 66%, 100%	0,50%,100%
Air filter		Non Woven Polyester Media Enclosed by HDPE Mesh							
Controller		Microprocessor based with LCD Display							
<b>Out Door Unit</b>		DSA361R1-OA/R2-O	DSA661R1/R2-OA	DSA1021R1/R2-OA	DSA1052R1/R2-OA	DSA661R1/R2-OA	DSA1321R1/R2-OA	DSA661R1/R2-OA & DSA1321R1/R2-OA	DSA1321R1/R2-OA
No of ODU's	per Unit	1	1	1	1	2	1	2	2
Compressor type		Recip Hermetically Sealed Scroll							
No of compressors/ ODU		1	1	1	2	1	1	1	1
Dimensions	W X D X H (mm)	1020 X 420 X 690	1020 X 420 X 950	1190 X 550 X 950	1435 X 635 X 950	1020 X 420 X 935	1435 X 625 X 950	1020 X 416 X 950 / 1435 X 635 X 950	1435 X 635 X 950
Power Supply		415V, Three Phase, 50 Hz, AC Supply							
Condenser Type		Air-Cooled FTHX Type							
Condenser Fan Type		Propeller Type							
Indoor Unit Weight	kg.	50	55	85	85	105	105	150	210
Out Door Unit weight	kg/ODU	80	90	160	170	90	190	90 Kg+90 Kg	190

R1 - With R22 refrigerant, R2 - With R407C refrigerant

## Air Cooled Packaged Air Conditioners - R1/R2 Series

DESCRIPTION	UNITS	DPA661R1/R2	DPA1052R1/R2	DPA1322R1/R2	DPA1321R1/R2	DPA1983R1/R2	DPA2642R1/R2
Nominal Cooling Capacity	TR	5.5	8.75	11.0	11.0	16.5	22.0
	Btu/Hr	66,000	1,05,000	1,32,000	1,32,000	1,98,000	2,64,000
	Kcal/Hr	16,632	26,460	33,264	33,264	49,896	66,528
Refrigerant		R1 Series: R 22 ; R2 Series: R 407C					
Power Supply		380/420 V, 3 PH., 50HZ, AC Supply					
External Finish		Pure Polyester Powder Coated GI Steel Housing					
<b>Indoor Unit</b>		DPA661R1/R2 A-I	DPA1052R1/R2 A-I	DPA1322R1/R2 A-I	DPA1321R1/R2 A-I	DPA1983R1/R2 A-I	DPA2642R1/R2 A-I
Dimensions	W X D X H (mm)	1020 X 420 X 950	1020 X 420 X 950	1020 X 420 X 950	1435 X 635 X 950	1020 X 420 X 950	1435 X 635 X 950
Type of Blower		Centrifugal Forward Curved, Double Inlet, Double Width					
Nominal Air Flow	CMH	3740	5950	7475	7475	11210	14950
	CFM	2200	3500	4400	4400	6600	8800
Power Supply		415V, Three Phase, 50 Hz, AC Supply					
External Finish		Pure Polyester Powder Coated GI Steel Housing					
Compressor type		Hermetically Sealed Scroll					
No of compressors Unit		1	2	2	1	3	2
Capacity Control		0, 100%	0, 50%, 100%	0, 50%, 100%	0, 100%	0, 33%, 66%, 100%	0, 50%, 100%
Air filter		Non Woven Polyester Media Enclosed by HDPE Mesh					
Controller		Microprocessor based with LCD Display					
<b>Out Door Unit</b>		DPA661R1-O	DPA661R1-O	DPA661R1-O	DPA1321-O	DPA661R1-O	DPA1321-O
No of ODU's	per Unit	1	2	2	1	3	2
Dimensions	W X D X H (mm)	1020 X 420 X 950	1020 X 420 X 950	1020 X 420 X 950	1435 X 635 X 950	1020 X 420 X 950	1435 X 635 X 950
Power Supply		230V, Single Phase, 50 Hz, AC Supply					
Condenser Type		Air-Cooled FTHX type					
Condenser Fan	Type	Propeller type					
Indoor Unit Weight	kg.	195	250	270	260	430	500
Out Door Unit weight	kg/ODU	50	50	50	130	50	130

R1 - With R22 refrigerant, R2 - With R407C refrigerant

## Air Cooled Ducted Split Air Conditioners - R3 Series

DESCRIPTION	UNITS	DSA522R3	DSA721R3B	DSA1081R3B	DSA1441R3B	DSA1442R3B	DSA2162R3B	DSA2882R3B
Nominal Cooling Capacity	TR	4.3	6.0	9.00	12.0	12.0	18.0	24.0
	Btu/Hr	51,000	72,000	1,08,000	1,44,000	1,44,000	2,16,000	2,88,000
	Kcal/Hr	13,000	18,144	27,216	36,288	36,288	54,432	72,576
Refrigerant		R 410A						
Power Supply		230V, Single Phase, 50Hz, AC						
External Finish		Pure Polyester Powder Coated GI Steel Housing						
<b>Indoor Unit</b>		DSA522R3-I	DSA721R3B-I	DSA1081R3B-I	DSA1441R3B-I	DSA1442R3B-I	DSA2162R3B-I	DSA2882R3B-I
Dimensions	W X D X H (mm)	1245 X 730 X 310	1175 X 635 X 460	1500 X 635 X 460	1860 X 635 X 460	1860 X 635 X 460	2035 X 1085 X 550	2135 X 1215 X 690
Power Supply		230V, Single 1 Ph, 50 Hz, AC Supply						
Type of Blower		Centrifugal Forward Curved, Double Inlet, Double Width						
Nominal Air Flow	CMH	2700	3740	5780	7480	7480	11560	14940
	CFM	1600	2200	3400	4400	4400	6800	8800
Capacity Control		0, 50%, 100%	0, 100%	0, 100%	0, 100%	0, 50%, 100%	0, 50%, 100%	0, 50%, 100%
Air filter		Non Woven Polyester Media Enclosed by HDPE Mesh						
Controller		Microprocessor based with LCD Display						
<b>Out Door Unit</b>		DSA522R3-O	DSA721R3B-O	DSA1081R3B-O	DSA1441R3B-O	DSA721R3B-O	DSA1081R3B-O	DSA1441R3B-O
No of ODUs	per Unit	1	1	1	1	2	2	2
Compressor type		Hermetically sealed Rotary	Hermetically sealed Scroll					
No of compressors/ODU		2	1	1	1	1	1	1
Dimensions	W X D X H (mm)	1020 X 420 X 950	1020 X 420 X 950	1190 X 550 X 950	1435 X 625 X 950	1020 X 420 X 950	1190 X 550 X 950	1435 X 625 X 950
Power Supply		230V, Single Phase, 50Hz, AC						
Condenser Type		Air cooled FTHX						
Condenser Fan Type		Propeller type						
Indoor Unit Weight	kg.	56	55	85	105	105	150	210
Out Door Unit weight	kg/ODU	90	95	160	190	95	160	190

## Air Cooled Packaged Air Conditioners - R3 Series

DESCRIPTION	UNITS	DPA721 R3	DPA1081 R3	DPA1441 R3	DPA1442 R3	DPA2163 R3	DPA2882 R3
Nominal Cooling Capacity	TR	6.0	9.00	12.0	12.0	18.0	24.0
	Btu/Hr	72,000	1,08,000	1,44,000	1,44,000	2,16,000	2,88,000
	Kcal/Hr	18,144	27,216	36,288	36,288	54,432	72,576
Refrigerant		R 410A					
Power Supply		380/420 V, 3 PH., 50HZ, AC Supply					
External Finish		Pure Polyester Powder coated GI Steel Housing					
<b>Indoor Unit</b>		DPA721R3-I	DPA1081R3-I	DPA1441R3-I	DPA1442R3-I	DPA2163R3-I	DPA2882R3-I
Dimensions	W X D X H (mm)	930 X 660 X 1700	930 X 660 X 1700	1260 X 760 X 1700	1260 X 760 X 1700	1500 X 835 X 1830	1500 X 930 X 1950
Type of Blower		Centrifugal Forward curved, Double Inlet, Double Width					
Nominal Air Flow	CMH	4080	6120	8155	8155	12230	16310
	CFM	2400	3600	4800	4800	7200	9600
Power Supply		415V, Three Phase, 50 Hz, AC Supply					
Compressor type		Hermetically Sealed Scroll					
No of compressors/ Unit		1	1	1	2	3	2
Compressor configuration		Solo	Solo	Solo	Tandem	Tandem+Solo	Tandem
No of Circuits		1	1	1	1	2	1
Capacity Control		0, 100%	0, 100%	0, 100%	0, 50%, 100%	0, 33%, 66%, 100%	0, 50%, 100%
Air filter		Non Woven Polyester Media Enclosed by HDPE Mesh					
Controller		Microprocessor based with LCD Display					
<b>Out Door Unit</b>		DPA721R3B-O	DPA1081R3B-O	DPA1441R3B-O	DPA1441R3B-O	DPA1441R3B-O+DPA721R3B-O	DPA1441R3B-O
No of ODUs	per Unit	1	1	1	1	2 (1 X 12TR + 1 X 6TR)	2
Dimensions	W X D X H (mm)	1020 X 420 X 950	1190 X 550 X 950	1435 X 625 X 950	1435 X 625 X 950	1435 X 625 X 950 + 1020 X 420 X 950	1435 X 625 X 950
Power Supply		230V, Single Phase, 50 Hz, AC Supply					
Condenser Type		Air-cooled FTHX type					
Condenser Fan	Type	Propeller type					
Indoor Unit Weight	kg.	200	250	300	300	500	580
Out Door Unit weight	kg/ODU	50	80	92	92	92+ 50	92

## Water Cooled Ducted Split Air conditioners - R1/R2 Series

DESCRIPTION	UNITS	DSW361R1/R2	DSW661R1/R2	DSW1052R1/R2	DSW1322R1/R2
Nominal Cooling Capacity	TR	3.0	5.5	8.75	11.0
	Btu/Hr	36,000	66,000	1,05,000	1,32,000
	Kcal/Hr	9,072	16,632	26,460	33,264
Refrigerant		R1 Series: R 22 ; R2 Series: R 407C			
Power Supply		380/420V, 3PH,50HZ,AC SUPPLY			
External Finish		Pure Polyester Powder Coated GI Steel Housing			
<b>Indoor Unit</b>					
Dimensions	W X D X H (mm)	950 X 575 X 380	1175 X 635 X 460	1500 X 635 X 460	1860 X 635 X 460
Type of Blower		Centrifugal Forward curved, Double Inlet, Double Width			
Nominal Air Flow	CMH	2040	3740	5950	7480
	CFM	1200	2200	3500	4400
Power Supply		230V, 1 Ph, 50 Hz, ac supply			
Capacity Control		0, 100%	0, 100%	0, 50%, 100%	0, 50%, 100%
Air filter		Non Woven Polyester Media Enclosed by HDPE Mesh			
Controller		Microprocessor based with LCD display			
<b>Condensing Unit</b>					
No of cds. units	per Unit	1	1	1	1
Compressor type		Recip	Hermetically Sealed Scroll		
No of compressors/ unit		1	1	2	2
Dimensions	W X D X H (mm)	800 X 655 X 545	800 X 655 X 545	1170 X 640 X 630	1170 X 640 X 630
Power Supply		415V, Three Phase, 50 Hz, AC Supply			
Condenser Type		Water-Cooled, Shell & Tube Type			
Cooling water required at 32°C	USGPM	11	20	31	40
	CMH	2.5	4.5	7	9.1
Indoor Unit Weight	kg.	50	55	85	105
Out Door Unit weight	kg/ODU	130	156	215	215

R1 - With R22 refrigerant,R2 - With R407C refrigerant

## Water Cooled Packaged Air Conditioners - R1/R2 Series

DESCRIPTION	UNITS	DPW661R1/R2	DPW1322R1/R2	DPW1983R1/R2
Nominal Cooling Capacity	TR	5.5	11.00	16.5
	Btu/Hr	66,000	1,32,000	1,98,000
	Kcal/Hr	16,632	33,264	49,896
Refrigerant		R1 Series: R 22 ; R2 Series: R 407C		
Dimensions	W X D X H (mm)	900 X 660 X 1700	1160 X 660 X 1700	1500 X 750 X 1800
Type of Blower		Centrifugal Forward Curved, Double Inlet, Double Width		
Nominal Air Flow	CMH	3740	7475	11210
	CFM	2200	4400	6600
Cooling Coil		Inner Grooved Copper Tubes with Al Slit Fins		
Power Supply		380/420V, Three Phase, 50 Hz, AC Supply		
External Finish		Pure Polyester Powder coated GI steel housing		
Capacity Control		0, 100%	0, 50%, 100%	0, 33%, 66%, 100%
Air filter		Non Woven Polyester Media Enclosed by HDPE Mesh		
Controller		Microprocessor based with LCD Display		
<b>Compressor type</b>				
Hermetically Sealed Scroll				
No of compressors/Unit		1	2	3
Condenser	Type	Shell & Tube Type		
Cooling water required at 32°C	USGPM	20	40	60
	CMH	4.5	9.1	13.6
Unit Weight	kg.	240	405	605

R1 - With R22 refrigerant, R2 - With R407C refrigerant

## Water Cooled Mini Series - Condensing Units

DESCRIPTION	UNITS	DSW121R3-O	DSW181R3-O	DSW241R3-O	DSW301R3-O
Capacity	TR	1	1.5	2	2.5
	Btu/Hr	12000	18000	24000	30000
External Finish		Pure Polyester Powder Coated GI Steel			
Refrigerant		R410A			
Dimensions W x H x D	(mm)	750 X 425 X 430	750 X 425 X 430	750 X 425 X 430	750 X 425 X 430
Net Weight	kg	59	67	68	70
Sound Level	dB (A)	52	52	54	55
Electrical Power Supply		230V, Single Phase, 50Hz, AC Power Supply			
Condenser Type		Shell & Tube	Shell & Tube	Shell & Tube	Shell & Tube
(Water In) Pipe Size	mm/inch	25/1" BSP			
(Water Out) Pipe Size	mm/inch	25/1" BSP			
Cooling Water Flow Required at 32°C	US GPM	3	4.5	6	7.5
Suction	mm(inch)	12.7 (1/2)	12.7 (1/2)	12.7 (1/2)	15.9 (5/8)
Liquid	mm(inch)	6.35 (1/4)	9.5 (3/8)	9.5 (3/8)	9.5 (3/8)
Quantity	No.	1	1	1	1
Type		Hermetically Sealed Rotary			

## Mini Series Indoor Unit - Concealed Type

DESCRIPTION	UNITS	DSW121R3-I	DSW181R3-I	DSW241R3-I	DSW301R3-I
Capacity	TR	1	1.5	2	2.5
	Btu/Hr	12000	18000	24000	30000
Dimensions W X H X D	mm	1115 X 270 X 515	1115 X 270 X 515	1115 X 270 X 515	1055 X 310 X 705
Net Weight	kg	29.00	30.00	30.00	31.00
Sound Level	dba	44	44	45	46
Type of Blower		DIDW Centrifugal Type			
Airflow	CFM	350	550	700	875
External Static Pressure	mm/Pa	10	15	20	25
Refrigerant Pipe Connections					
Liquid- Dia	mm	6.35 (1/4)	9.5 (3/8)	9.5 (3/8)	9.5 (3/8)
Suction - Dia	mm	12.7 (1/2)	12.7 (1/2)	12.7 (1/2)	15.9 (5/8)
Electrical Power Supply	V	230V, Single Phase, 50Hz, AC Power Supply			
Rated Current	A	0.33	0.33	0.64	0.64
Fan Motor Output Power	Watts	62	62	150	150
Quantity		1	1	1	1
Air Filter		Non-woven Polyester Media enclosed by HDPE Mesh			
Controller		Microprocessor Based with LCD Display			

## Mini Series Indoor Unit - Hi-wall

DESCRIPTION *	UNITS	B1-3HW12LBTU	B1-3HW18LBTU	B1-3HW24LBTU
Capacity	TR	1	1.5	2
	Btu/Hr	12000	18000	24000
Dimensions W x H x D	mm	845 X 290 X 210	970 X 300 X 225	1080 X 325 X 250
Net Weight	kg	10.00	13.50	17.00
Airflow	CFM	370	530	650
Sound Level	dBA	33	37	38
Refrigerant Pipe Connections				
Liquid- Dia	mm (Inch)	6.35 (1/4)	6.35 (1/4)	6.35 (1/4)
Suction - Dia	mm (Inch)	12.7 (1/2)	12.7 (1/2)	15.9 (5/8)
Electrical Power Supply		230V, Single Phase, 50Hz, AC Power Supply		
Fan Motor Input Power	Watts	55	70	95
Rated Current	A	0.4	0.5	0.55

\* Recommended Model. Actual model no. may be different due to regular product upgradation

## Mini Series Indoor Unit - Cassette Type

DESCRIPTION *	UNITS	BS-3SD18YATU	BS-1SD24YATU	BS-SD36SAU
Capacity	TR	1.5	2	2.5
	Btu/Hr	18000	24000	30000
Dimensions - Body	mm	840 X 840 X 240	840 X 840 X 240	840 X 840 X 290
Dimensions - Panel	mm	952 X 952 X 60		
Net Weight - Body	kg	28.00	29.00	33.00
Net Weight - Panel	kg	7.00	7.00	7.00
Airflow	CFM	700	780	1020
Sound Level	dBA	34	41	48
Refrigerant Pipe Connections				
Liquid- Dia	mm (Inch)	6.35 (1/4)	9.5 (3/8)	9.5 (3/8)
Suction - Dia	mm (Inch)	12.7 (1/2)	15.9 (5/8)	15.9 (5/8)
Electrical Power Supply		230V, Single Phase, 50Hz, AC Power Supply		
Fan Motor Input Power	Watts	58	74	74
Rated Current	A	0.4	0.6	0.6
Drain Pump Motor Power	Watts	12.7 (1/2)	12.7 (1/2)	12.7 (1/2)

\* Recommended Model. Actual model no. may be different due to regular product upgradation. Sound Level values are based on the measurement taken in a semi anechoic chamber. Actual values may vary depending on the external noise disturbances.







**For more information, please contact:**

**Blue Star International FZCO:** Unit No 3E-520, Building No 3E (East Side)  
Dubai, United Arab Emirates (UAE), PO Box : 293719 , Phone : +971 4 230 6900  
Fax: +971 4 227 5101 Email: [exports@bluestarindia.com](mailto:exports@bluestarindia.com)

**India:** 2nd Pokhran Road, Majiwada,  
Thane (West) - 400 601, India. Phone: +91 22 6792 4000  
Customer Care Email: [globalexpertservice@bluestarindia.com](mailto:globalexpertservice@bluestarindia.com)  
Visit us at [www.bluestarindia.com](http://www.bluestarindia.com)



**Authorised Distributor**