


**Important: Read all instructions prior to installation.**

### Safety and Notes

1. Product should be installed and serviced in accordance with applicable national, state, and local building and electrical codes.
2. To reduce the risk of electric shock, ensure that the main power source and circuit breakers are switched off before performing any installation or wiring procedures. Avoid looking directly into lamp when illuminated.
3. Ensure all mounts are securely attached and will support the weight of the fixture. Failure to properly support fixture may result in damage or injury, for which the manufacturer does not assume responsibility.
4. There are no serviceable parts inside this fixture. Do not attempt to dismantle or service this fixture in any way. If LEDs or protective lens cover are damaged, the fixture must be replaced.
5. Not intended for recess mounting in any type of installation.
6. Use minimum 18 AWG coated wire for supply leads and connect to 120 VAC only.

### Wiring Diagram

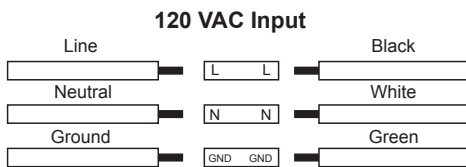

### Specifications

Model	WSR/WSS Series
Operating Temperature	-22°–104° F (-30°–40° C)
Environmental Rating	Suitable for dry locations

Check product label for specific electrical specifications related to installation.  
Improper installation will void warranty.

### Installation

1. Turn off breaker to remove supply power from circuit.
2. Pull the fixture **A** and take the fixture head out, loose the screw **B**, and separate the junction box.
3. Cut hole pattern on the wall,  
**hole size: L5.9in\*H1.9in (L148\*H48mm),**  
**Min depth of the hole is 2.05in (52mm).**
3. Connect wiring, see the '**Wiring Diagram**' above, and put all the wires inside the junction box.
4. Attach the junction box to the hole and secure the junction box by the four screws.
5. Attach the fixture to the junction box and screw **B**, secure the fixture.
6. Adjust the fixture head and choose the angle needed.
7. Restore supply power.

