

INSTALLATION INSTRUCTIONS

WARNING

1. This product must be installed in accordance with the applicable installation code by a person familiar with the construction and operation of the product and the hazards involved.
2. In order to avoid the danger of electric shock, make certain that the power supply is disconnected before installing or performing maintenance.

MOUNTING

1. Do not wire fixture until fixture is mounted. Do not allow fixture to hang from wiring.
2. This fixture can be mounted to any metal ½" NPS (pipe size) threaded mounting (supplied by others).
3. Route fixture leads through the mounting hole.
4. Thread 1/2" Knuckle onto weatherproof box or stake and secure with locknut. Use a sealing compound on the threads to ensure a watertight seal.
5. Complete the **Electrical Connection**.

ELECTRICAL CONNECTION

Fixture is equipped with universal driver 120-277V and will work with any voltage within this range, 50/60 Hz.

PHASE TO NEUTRAL WIRING 120/277V


1. Connect supply green ground to fixture ground (green or bare copper) lead.
2. Connect supply White common to fixture's White lead.
3. Connect supply Black (hot) to fixture's Black lead.

Tuck all wires carefully into wiring chamber ensuring that no wires are pinched.

PHASE TO PHASE WIRING 208/240V

1. Connect supply ground to fixture ground (green or bare copper) lead.
2. Connect supply L1 (Hot) to fixture's White lead.
3. Connect supply L2 (Hot) to fixture's Black lead.

Tuck all wires carefully into wiring chamber ensuring that no wires are pinched.

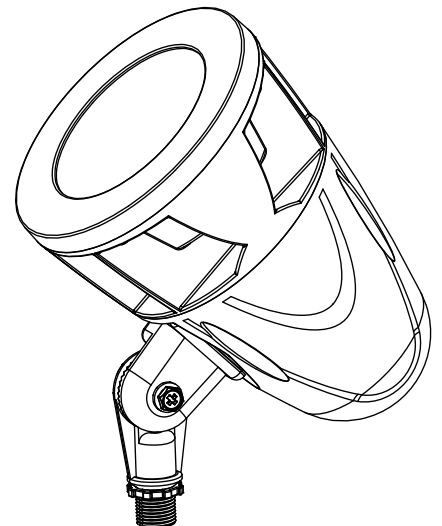

WARNING: PROPOSITION 65

Handling the coated electrical wires and fixture of this product can expose you to chemicals including lead, which is known to the State of California to cause cancer and/or birth defects or other reproductive harm. For more information go to [www. P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).