


LEGEND:


- ⊠ ISOLATION VALVE
- ⊠ BYPASS VALVE
- ⊗ PRESSURE GAUGE & SAMPLE POINT
- ∇ OPEN DRAIN
- * VACUUM BREAKER
- ▬ RAW WATER LINES
- ▬ FILTERED WATER LINES
- ▬ WATER TO OPEN DRAIN
- ▬ TREATED WATER LINES

STAGER
CONTROLLER



| DAC Series Quadplex Model | Typical | | RO | Free Chlorine | Max Flow To Drain | Pipe Size | | Media | Mineral Tank | | Installation | | Shipping Weight | Operating Weight |
|---------------------------------|-------------------|-------|-------|---------------|----------------------|-----------|-------|----------|--------------|--------|--------------|-------|--------------------|---------------------|
| | Service Flow Rate | | | | | Service | Drain | Per Tank | Diameter | Height | Height | Depth | | |
| | USGPM | USGPM | USGPM | USGPM | in | in | ft3 | in | in | in | in | in | lbs | lbs |
| DAC 30-2" | 116 | 48 | 48 | 50 | 2" | 2" | 12.5 | 30 | 88 | 99 | 36 | 135 | 3,937 | 10,337 |
| | 7.32 | 3.03 | 3.03 | 3.15 | 50 | 50 | 0.35 | 762 | 2235 | 2515 | 914 | 3429 | 1,786 | 4,690 |
| DAC 36-2" | 168 | 72 | 72 | 70 | 2" | 2" | 17.6 | 36 | 87 | 100 | 42 | 159 | 5,303 | 14,503 |
| | 10.60 | 4.54 | 4.54 | 4.42 | 50 | 50 | 0.50 | 914 | 2210 | 2540 | 1067 | 4039 | 2,406 | 6,580 |
| DAC 42-3" | 232 | 112 | 112 | 95 | 3" | 3" | 24.0 | 42 | 95 | 108 | 48 | 183 | 7,211 | 20,811 |
| | 14.64 | 7.07 | 7.07 | 5.99 | 75 | 75 | 0.68 | 1067 | 2413 | 2743 | 1219 | 4648 | 3,272 | 9,442 |
| DAC 48-3" | 300 | 148 | 148 | 125 | 3" | 3" | 31.0 | 48 | 94 | 109 | 54 | 207 | 9,414 | 26,614 |
| | 18.93 | 9.34 | 9.34 | 7.89 | 75 | 75 | 0.88 | 1219 | 2388 | 2769 | 1372 | 5258 | 4,271 | 12,075 |
| DAC 63-4" | 520 | 256 | 256 | 215 | 3" | 4" | 54.0 | 63 | 96 | 111 | 69 | 267 | 19,207 | 42,007 |
| | 32.81 | 16.15 | 16.15 | 13.56 | 100 | 100 | 1.53 | 1600 | 2438 | 2819 | 1753 | 6782 | 8,715 | 19,060 |

Typical service based on 6 usgpm/ft2, RO pretreat based on 2.5 usgpm/ft2 & free Chlorine removal based on 10 usgpm/ft2

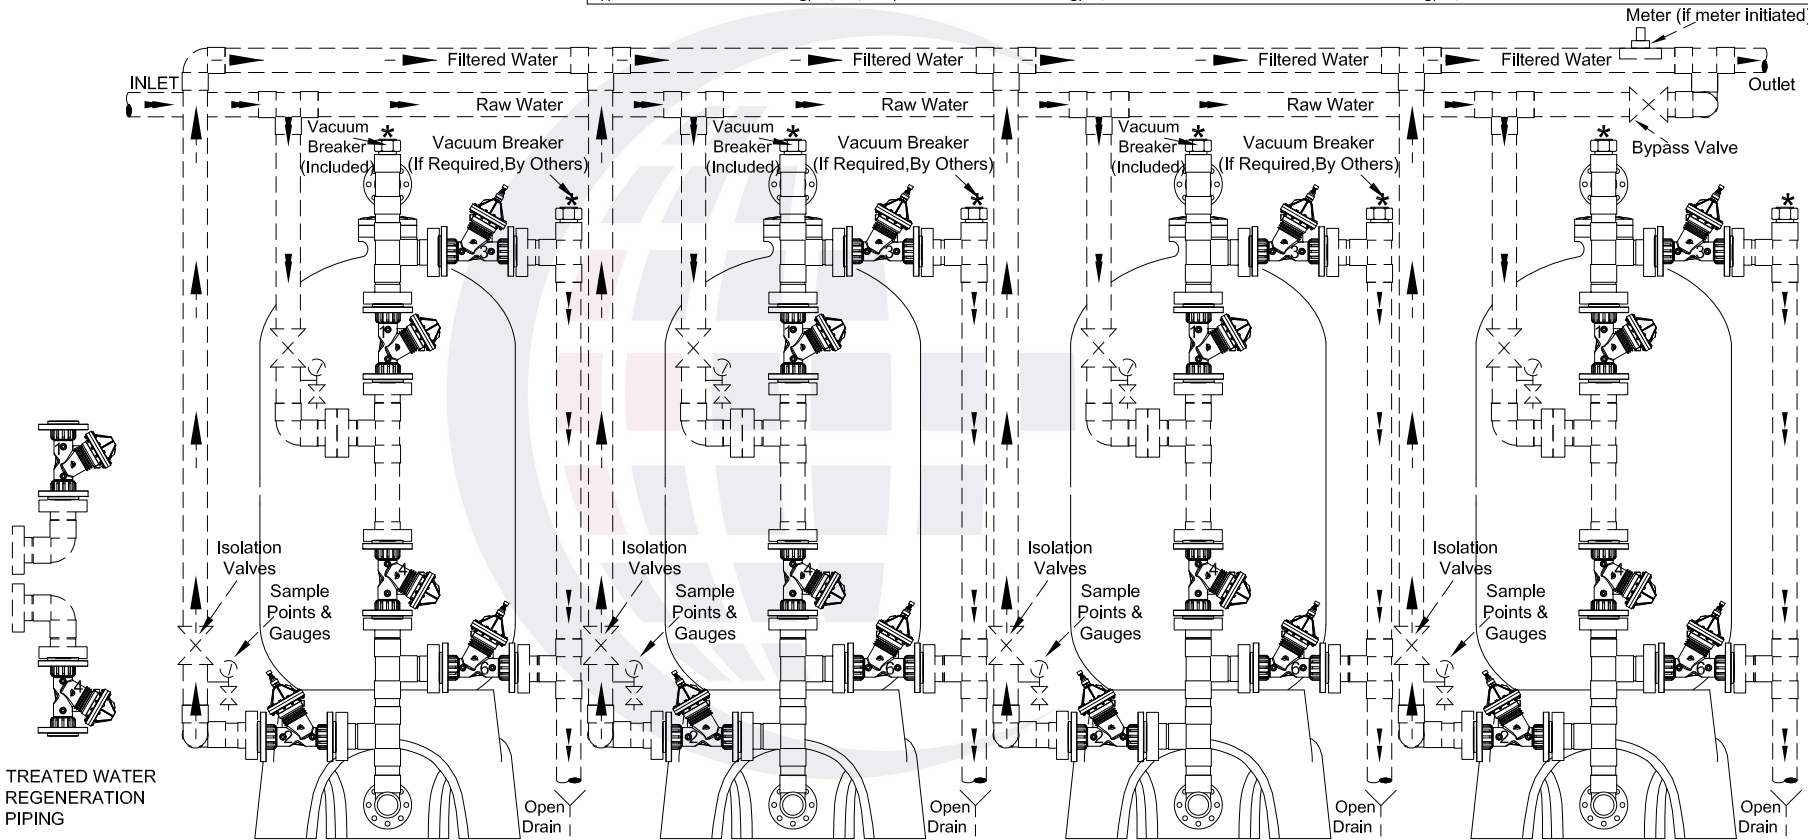

RAW WATER REGENERATION PIPING SHOWN

NOTES:

- MAXIMUM RECOMMENDED SYSTEM PRESSURE IS 100 PSIG (690 kPa).
- MAXIMUM RECOMMENDED SYSTEM TEMPERATURE IS 90° F (32°C).
- TANKS, AND MEDIA ARE NSF APPROVED. TRIPOD TANKS TO BE SECURELY ATTACHED TO THE FLOOR.
- ALL PIPING, FITTINGS, INTERCONNECTING PIPING, ISOLATION & SAMPLE VALVES AND GAUGES SHOWN BY BROKEN LINES ARE BY OTHERS
- SUPPLIED MANIFOLD IS SCH 80 PVC AND IS SUPPLIED WITH ONE VACUUM BREAKER. RECOMMENDED AIR RELEASE VALVE IS BY OTHERS. SYSTEM CAN BE PIPED AS RAW WATER OR TREATED WATER REGENERATION.
- ALL PIPING MUST BE PROPERLY SUPPORTED AND BRACE TO HANDLE THE THRUST OF THE CHANGE OF WATER FLOW (BY OTHERS)
- GLASS FIBER REINFORCED THERMOPLASTIC DIAPHRAGM VALVES ARE SEQUENCED BY AN ELECTRONIC MULTIPORT STAGER. ELECTRICAL POWER REQUIRED - 120 VOLT, 1 PHASE, 60 HZ. MULTI-TANK SYSTEMS ARE SERIES REGENERATION.

- SYSTEM MUST BE INSTALLED TO COMPLY WITH ALL FEDERAL, STATE, PROVINCIAL AND LOCAL CODES.
- FLOOR DRAINS MUST BE SIZED TO CARRY THE MAXIMUM LISTED FLOW TO DRAIN. REFER TO THE INSTALLATION AND OPERATION MANUAL FOR FURTHER DETAILS.
- MEDIA BED CONSISTS OF 12 x 40 MESH, NSF APPROVED ACID WASHED COCONUT BASED ACTIVATED CARBON ON A GRADED SUPPORT BED

**DAC SERIES ACTIVATED CARBON
QUADRAPLEX FILTER SYSTEM**

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO CANATURE WATERGROUP. THE REPRODUCTION, TRANSFER, OR OTHER EXPLOITATION OF ANY INFORMATION CONTAINED HEREIN IS NOT PERMITTED WITHOUT PRIOR WRITTEN APPROVAL OF CANATURE WATERGROUP. THE MANUFACTURER RESERVES THE RIGHT TO MAKE PRODUCT REVISIONS, WHICH MAY DEVIATE FROM THE SPECIFICATIONS AND DESCRIPTIONS STATED HEREIN WITHOUT OBLIGATION TO CHANGE PREVIOUSLY MANUFACTURED PRODUCTS OR TO NOTE THE CHANGE. NOT DRAWN TO THE SCALE UNLESS OTHERWISE SPECIFIED.



| | | |
|----------|----------------|-----|
| Project: | Date: 2/20/024 | Rev |
| | Dwg# DAC 04 | 0 |