

IMPORTANT SAFETY INFORMATION

Read all instructions before installation.

GENERAL INSTRUCTIONS

- These products may represent a possible shock or fire hazard if improperly installed or attached in any way. Products should be installed in accordance with these instructions and current electrical codes, local standards and regulations.
- Can be used in dry, damp and wet locations.
- **Risk of electric shock.** Avoid making connections or disconnections when the equipment is wet. Do not use with extension cord near water or where water may accumulate. Do not submerge in water. Keep at least 16ft / 4.9m from pools and spas.
- When used outdoors in wet locations, use only on GFCI protected circuits. Extension cords rated for outdoor use must be used and the receptacle cover must always be in place (unless multiple cords are connected) to prevent water entry.

CAUTION

To reduce the risk of fire, electric shock or injury to persons:

- Commercial grade string light is intended for installation indoors or outdoors.
- String lights must be supported by steel guide cables or other suitable supporting hardware such as s-hooks, zip ties or bolts (not included). Proper diameter cabling must be used for the maximum span distance between supports according to local building codes. See installation instructions for details.
- Light sockets must be installed base up so that bulbs are facing down ONLY.
- Keep combustible material clear of bulbs with a minimum of 3" space from the nearest object.
- Do not cluster the bulbs.
- Not intended for installation in ceilings, soffits, cabinets or other enclosed spaces.
- Do not secure light strings to building or other structural supports using nails, staples or other sharp conducting materials that might damage the wires.
- Avoid damage to the insulation during installation. Do NOT pierce or otherwise compromise wire or socket outer covering.
- Periodically inspect wire and sockets for degradation due to weather, UV light or other damage. Discontinue use of worn out light string.
- Not for use with dimmers.
- **Do not exceed 648 watts, all sets combined. See chart.**

WARNING

Risk of electric shock.

Disconnect power at source before wiring, replacing light bulbs, connecting multiple sets or servicing in any way.

The light string sets are supplied with an attached 3-prong plug that will only fit into a 3-prong outlet. Do not alter the plug in any way.


For string light sets installed outdoors, do not replace light bulbs or connect multiple sets during rain or wet weather – replace light bulbs / connect multiple sets only during dry and calm weather.

REPLACING LIGHT BULBS AND CONNECTING MULTIPLE SETS

1) Unscrew existing light bulb by twisting counterclockwise. Dispose of light bulb in appropriate manner.

2) Replace with E26 medium base light bulbs by screwing bulb into socket clockwise until the top of socket forms a tight seal around the bulb – this prevents moisture from getting into socket.


3) Connect multiple sets.

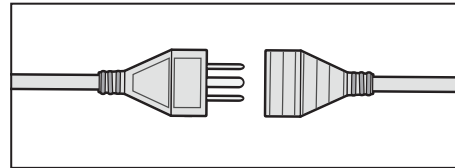

4) Do not exceed 648 watts all sets combined. See chart below:


STG-2412-27K - 24' LED String Light

MAXIMUM WATTAGE	NUMBER OF LIGHT SETS
2w OR LESS	27
3w	18
4w	13
5-6w	9
7-9w	6
10-11w	4

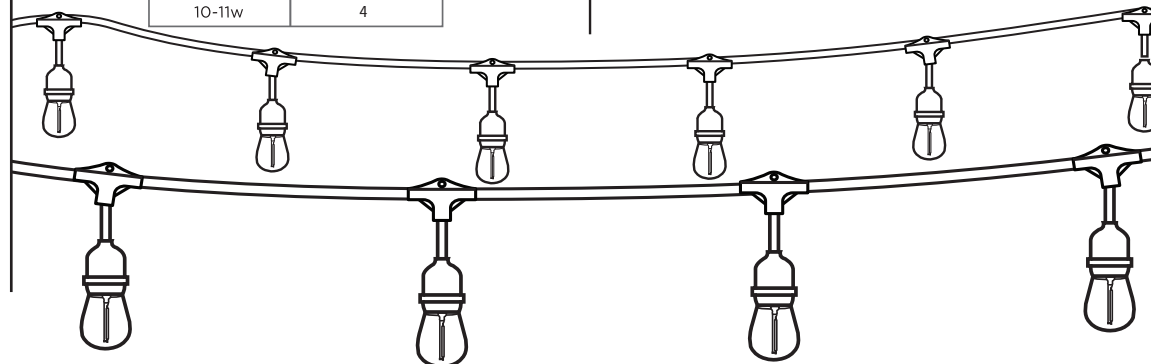


INSTALLATION INSTRUCTIONS

1) Attach using a guide wire with s-hooks or zip ties (not included).



2) Attach directly to structural support minimum every 24 ft. / 7.3m using hardware (not included).

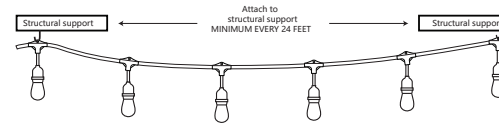

NOTE

This device complies with Part 15 of the FCC rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. This lighting equipment complies with CAN ICES-005 (B).

WARRANTY

This product has a 2 year warranty.

STG-2412-27K
LED STRING LIGHTS
GUIRLANDE LUMINEUSE DEL
SERIE DE LUCES LED



Intertek