

IMPORTANT SAFETY INSTRUCTIONS

IMPORTANT: Read all safety precautions and installation instructions carefully before installing or servicing this fixture.

DANGER-RISK OF SHOCK-DISCONNECT POWER BEFORE INSTALLATION

- *To reduce the electrical shock or other personal injury, ensure the power is turned off all the fuse or breaker box before making any electrical connections.
- *To reduce the risk of electrical shock, and to assure proper operation, this fixture must be adequately grounded. To accomplish proper grounding, there must be a separate ground wire(yellow/green) contact between this fixture and the ground connection of your main power supply panel.
- *Do not handle any energized fixture or attempt to energize any fixture with wet hands or while standing on a wet or damp surface or in water.
- *It is recommended that a qualified electrician perform all wiring. Consult a qualified electrician to ensure corred branch circuit conductor. This fixture must be wired in accordance with all national and local electrical codes.
- *This fixture is designed for use in a 120VAC, 60Hz fused circuit.
- *Do not look into the lights.





WARNING: Failure to comply with these instructions could result in a potentially fatal electric shock and/or property damage.

PRE-INSTALLATION


PLANNING INSTALLATION

- *Turn off the electrical power at the fuse or circuit breaker box before installing or servicing any part of this fixture.
- *Carefully remove the fixture from the carton and check to make sure that all parts are included. Be careful not to misplace any of the screws or parts needed for installing the fixture.

HARDWARE INCLUDED

 x2	 x4	 x4	 x3
Small Pin Cross Machine Screws	Large Pointed Pin Cross Wood Screws	Wall Anchors	Wire Nuts

PARTS

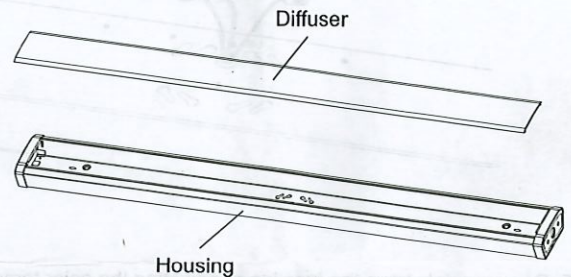


INSTRUCTIONS

CAUTION: Before beginning installation turn off the circuit breaker and light switch.

STEP 1


- *Remove diffuser from housing carefully.

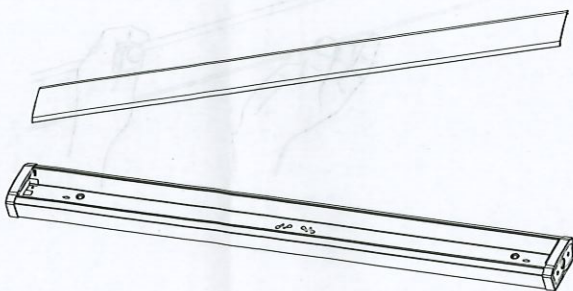


STEP 2

- *Installation Method A

1. Install the two screws into the junction box. **NOTE:** Leave 1/4" of screw exposed to accommodate housing.

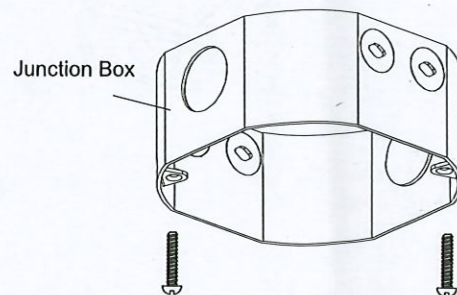


2. Connecting the wires into the junction box by Wire Nuts. Connect the AC line to the black(line) and white(neutral) input wires of the LED driver using 14-18AWG twist-on wire connectors. Connect the ground wire to the Yellow/Green grounding wire.

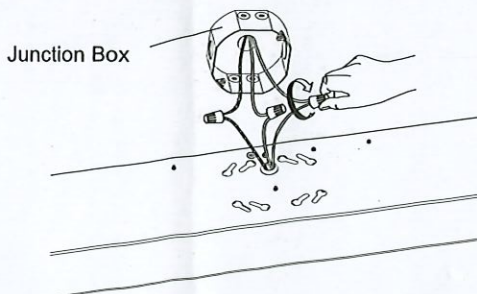


3. ATTACHING THE HOUSING

- (1) Attach the Housing to the junction box by aligning the holes on the Housing with the screws on the junction box.
- (2) Turn housing clockwise to lock in place and tighten screws to ensure the fixture is secure and will not move.

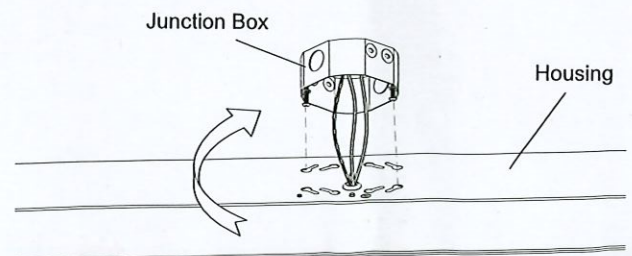


Installation Method B


1. Reference to the housing and drill 4 holes with a drill bit in the proper position. NOTE: Drilling depth 30mm.

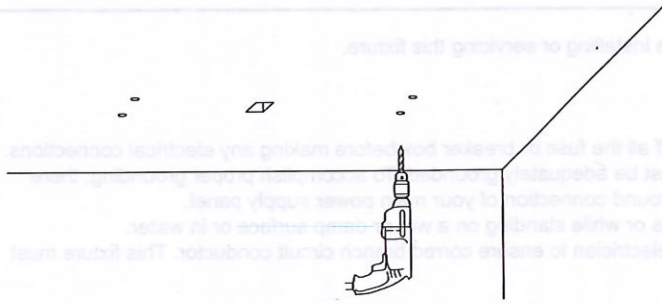

2. Install the wall anchors into the hole, and lock the screw in place. NOTE: Leave 1/4" of screw exposed to accommodate housing.

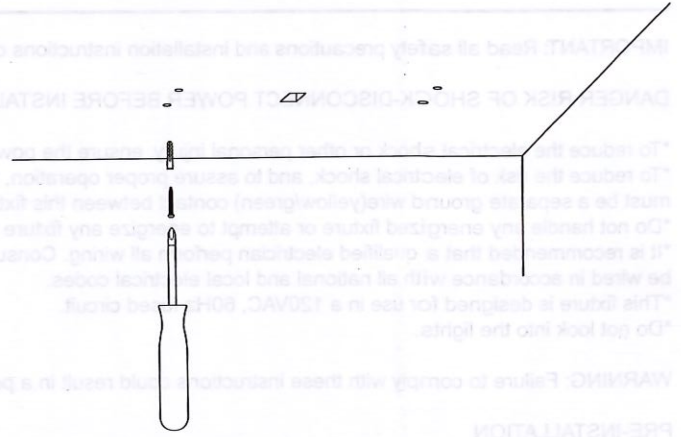


3. Connecting the wires into the junction box by Wire Nuts.

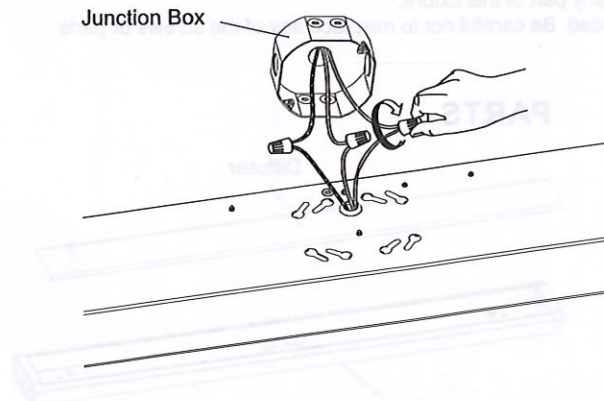


4. ATTACHING THE HOUSING

(1) Attach the Housing to the screws by aligning the holes on the Housing with the screws.
(2) Move housing to lock in place and tighten screws to ensure the fixture is secure and will not move.

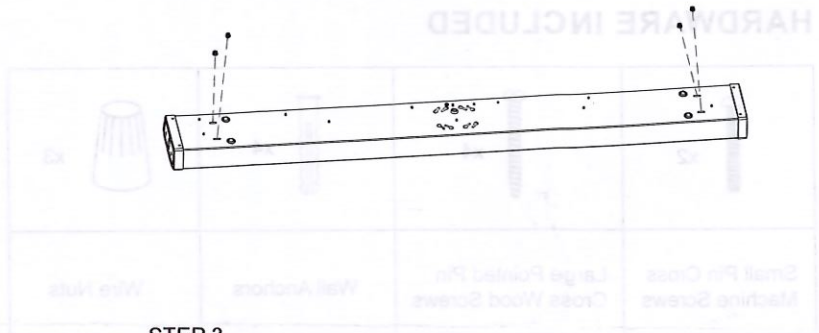


5. Some models have the function of adjusting the color temperature, which can be controlled by the shift switch on the power supply.

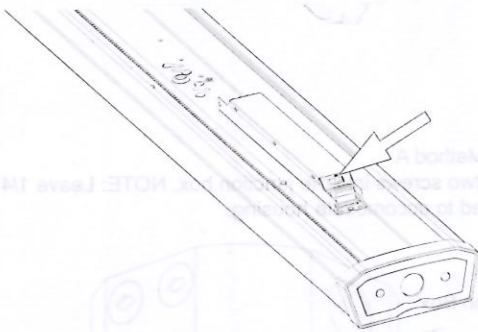

STEP 3

ATTACHING THE DIFFUSER

To install diffuser-starting at one end of housing, insert diffuser slot onto edge of housing, carefully squeeze diffuser to engage opposite side with housing, continue this action down length of diffuser until fully installed onto housing.

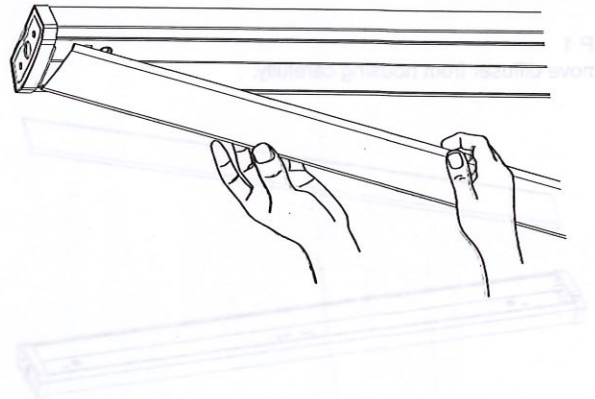

1. ATTACHING THE HOUSING
(1) Attach the Housing to the junction box by aligning the holes on the Housing with the screws on the junction box.
(2) Turn housing clockwise to lock in place and tighten screws to ensure the fixture is secure and will not move.

2. Connecting the wires into the junction box by Wire Nuts.
Connect the AC line to the backline and white(neutral) and wire of the LED driver using 14-18AWG twist-on wire connector. Connect the ground wire to the Yellow/Green grounding wire.

