




## DIMENSIONS:

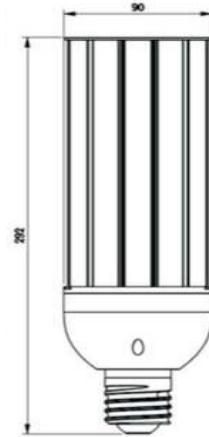

11-3/4" (H) x 3-3/4" (D)

## CL-EZ2-75W-30K CL-EZ2-75W-50K

### Corn Lamp E22 Series (75w)

#### ELECTRICAL SPECIFICATIONS:

- Voltage: 100-300VAC 50-60Hz
- CRI: Ra>80
- Power factor: >0.9
- Φ90 Internal Driver 180° Corn Lamp:  
Working temperature: -30°C ~55°C  
Storage temperature: -40°C ~85°C
- Φ90 Internal Driver 360° Corn Lamp:  
Working temperature: -40°C ~45°C  
Storage temperature: -25°C ~65°C

#### LIGHTING SPECIFICATIONS:

- LED light source: Samsung, Epistar
- Lamp base: E39 mogul base for 27W,75W and 100w
- LED quantity: 252pcs
- Luminous flux: 7875 ± 100lm
- IP65 Wet Location
- Base type: E26, E27, E39, E40
- Lamp head color: White, gray, customized color

**WARRANTY:** 5 years  
Lifespan: 50,000 hours

**CERTIFICATIONS:** UL Certificate




MODEL NO	WATT	LUMES	COLOR TEMP	BASE
CL-EZ2-75W-30K	75W	7875	3000K	E39
CL-EZ2-75W-50K	75W	7875	5000K	E39

E2 ENLARGER	ENLARGES E26 BULB TO BE USED IN E39 SOCKET
E39 REDUCER	REDUCES E39 BULB TO BE USED IN E26 SOCKET

#### PACKING DETAILS:


- Φ90 Internal Driver 180° Corn Lamp Net weight: 824g
- Φ90 Internal Driver 360° Corn Lamp Net weight: 900g
- Inner box size: 108x108x340
- Gross weight: 963g
- Carton size: 548x356x242
- Gross weight: 12.6kg
- Packing qty: 12pcs/carton

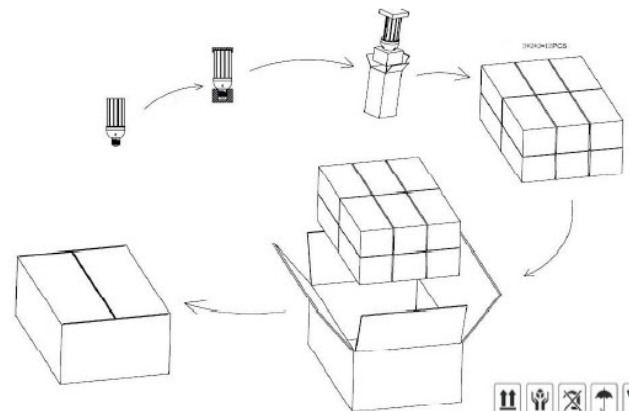

## CL-EZ2-75W-30K


## CL-EZ2-75W-50K

### Corn Lamp EZ2 Series (75w)

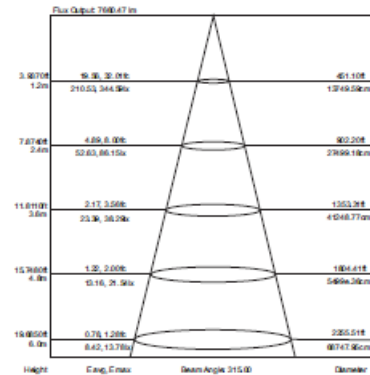


### PHOTOMETRICS:

Φ90 Internal Driver 180° Corn Lamp:

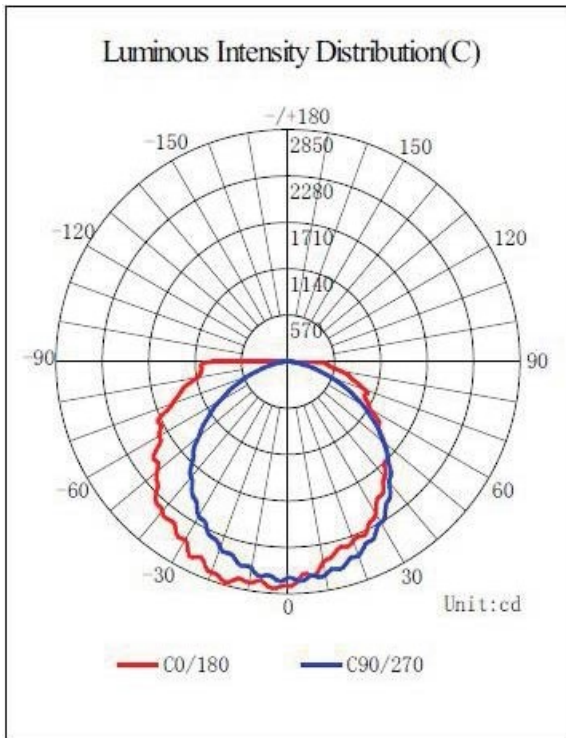

Φ90 Internal Driver 180° Corn Lamp:

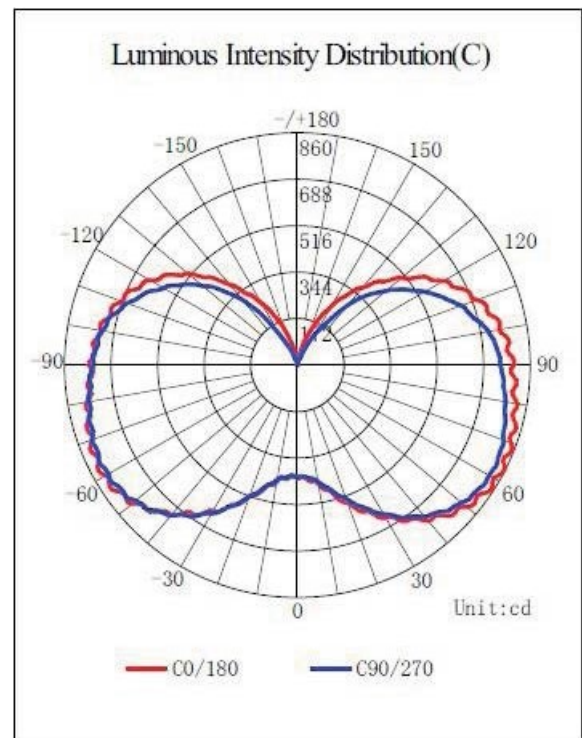

### INSTALLATION DIAGRAM:

2 Easy Ways to Install:

- Bypass ballast and directly connect to 120V AC
- Use with existing HID ballast

**WARNING:**

HID ballast consumes electricity when the switch is on.  
For best energy-saving results, ballast should be bypassed.

