


LEGEND:


- ⊗ ISOLATION VALVE
- ⊗ BYPASS VALVE
- ⊗ PRESSURE GAUGE & SAMPLE POINT
- ∨ OPEN DRAIN
- * VACUUM BREAKER
- ▬ RAW WATER LINES
- ▬ FILTERED WATER LINES
- ▬ WATER TO OPEN DRAIN
- ▬ TREATED WATER LINES

STAGER
CONTROLLER



DNX Series Quadplex Model	Typical				Peak				RO				Pipe Size		Media		Mineral Tank		Installation			Shipping Weight		Operating Weight	
	Max Recommended Flow Rate								Flow To Drain				Service	Drain	Per Tank	Diameter	Height	Height	Height	Depth	Width	lbs	lbs		
	USGPM	USGPM	USGPM	USGPM	USGPM	USGPM	USGPM	USGPM	in	in	ft3	in	in	in	in	in	in	in	in	in	kg	kg			
	l/s	l/s	l/s	l/s	l/s	l/s	l/s	l/s	mm	mm	m3	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	mm			
DNX 30-2"	320	292	156	60	2"	2"	12.5	30	88	99	36	135	5,381	11,781											
	20.19	18.42	9.84	3.79	50	50	0.35	762	2235	2515	914	3429	2,441	5,345											
DNX 36-3"	276	420	228	85	2"	2"	17.6	36	87	100	42	159	7,336	16,536											
	17.41	26.50	14.38	5.36	50	50	0.50	914	2210	2540	1067	4039	3,329	7,503											
DNX 42-3"	384	576	308	120	3"	3"	24.0	42	95	108	48	183	10,143	23,743											
	24.23	36.34	19.43	7.57	75	50	0.68	1067	2413	2743	1219	4648	4,602	10,773											
DNX 48-4"	504	752	400	160	3"	3"	31.0	48	94	109	54	207	13,155	30,355											
	31.80	47.44	25.24	10.09	75	75	0.88	1219	2388	2769	1372	5258	5,968	13,772											

Typical service based on 10 usgpm/ft2 Peak based on 15 usgpm/ft2 Flowrates may change depending upon actual feed water quality conditions
Backwash flowrates based on cold water. If regeneration feed water is above 45 of, the backwash flow rate will have to be increased

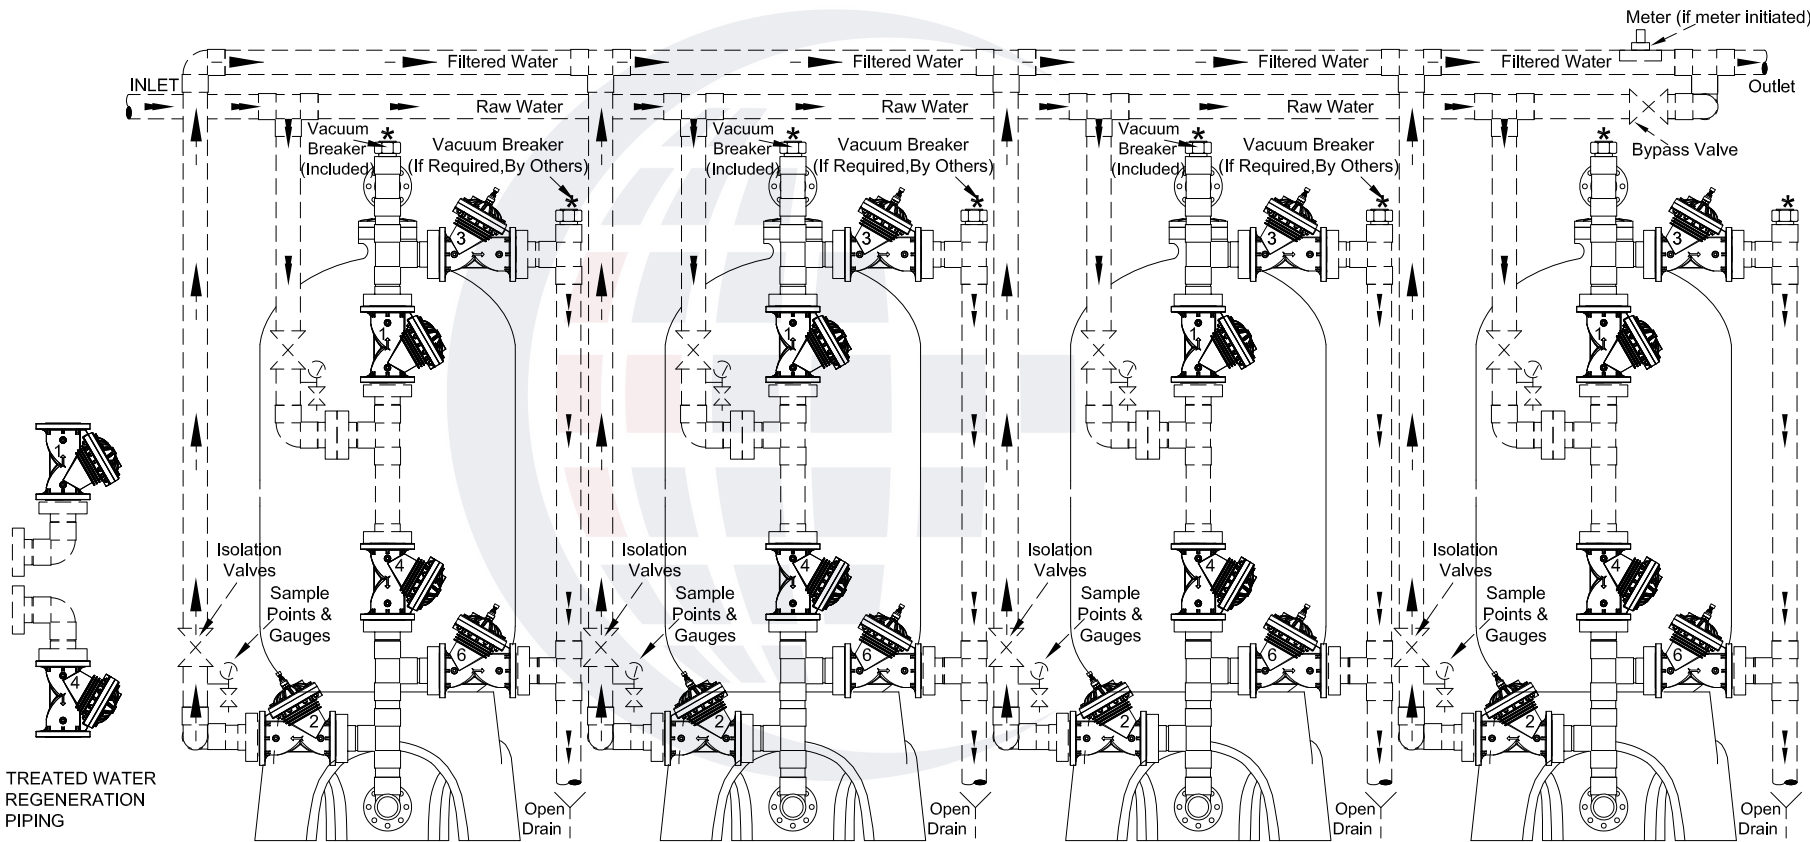

RAW WATER REGENERATION PIPING SHOWN

NOTES:

- MAXIMUM RECOMMENDED SYSTEM PRESSURE IS 100 PSIG (690 kPa).
- MAXIMUM RECOMMENDED SYSTEM TEMPERATURE IS 90° F (32°C).
- TANKS, AND MEDIA ARE NSF APPROVED. TRIPOD TANKS TO BE SECURELY ATTACHED TO THE FLOOR.
- ALL PIPING, FITTINGS, INTERCONNECTING PIPING, ISOLATION & SAMPLE VALVES AND GAUGES SHOWN BY BROKEN LINES ARE BY OTHERS
- SUPPLIED MANIFOLD IS SCH 80 PVC AND IS SUPPLIED WITH ONE VACUUM BREAKER. RECOMMENDED AIR RELEASE VALVE IS BY OTHERS. SYSTEM CAN BE PIPED AS RAW WATER OR TREATED WATER REGENERATION.
- ALL PIPING MUST BE PROPERLY SUPPORTED AND BRACE TO HANDLE THE THRUST OF THE CHANGE OF WATER FLOW (BY OTHERS)
- GLASS FIBER REINFORCED THERMOPLASTIC DIAPHRAGM VALVES ARE SEQUENCED BY AN ELECTRONIC MULTIPORT STAGER. ELECTRICAL POWER REQUIRED - 120 VOLT, 1 PHASE, 60 HZ. MULTI-TANK SYSTEMS ARE SERIES REGENERATION.

- SYSTEM MUST BE INSTALLED TO COMPLY WITH ALL FEDERAL, STATE, PROVINCIAL AND LOCAL CODES.
- FLOOR DRAINS MUST BE SIZED TO CARRY THE MAXIMUM LISTED FLOW TO DRAIN.
- REFER TO THE INSTALLATION AND OPERATION MANUAL FOR FURTHER DETAILS.
- MEDIA BED CONSISTS OF NSF APPROVED, NEXTSAND ON A GRADED SUPPORT BED

**DNX SERIES NEXTSAND
QUADRAPLEX FILTER SYSTEM**

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO CANATURE WATERGROUP. THE REPRODUCTION, TRANSFER, OR OTHER EXPLOITATION OF ANY INFORMATION CONTAINED HEREIN IS NOT PERMITTED WITHOUT PRIOR WRITTEN APPROVAL OF CANATURE WATERGROUP. THE MANUFACTURER RESERVES THE RIGHT TO MAKE PRODUCT REVISIONS, WHICH MAY DEVIATE FROM THE SPECIFICATIONS AND DESCRIPTIONS STATED HEREIN WITHOUT OBLIGATION TO CHANGE PREVIOUSLY MANUFACTURED PRODUCTS OR TO NOTE THE CHANGE. NOT DRAWN TO THE SCALE UNLESS OTHERWISE SPECIFIED.



Project:	Date: 2/20/024	Rev: 0
	Dwg# DNX 04	