




Photometrics: T8-EZ6-GS-3FT-12W




BUG Rating: B1-U3-G1

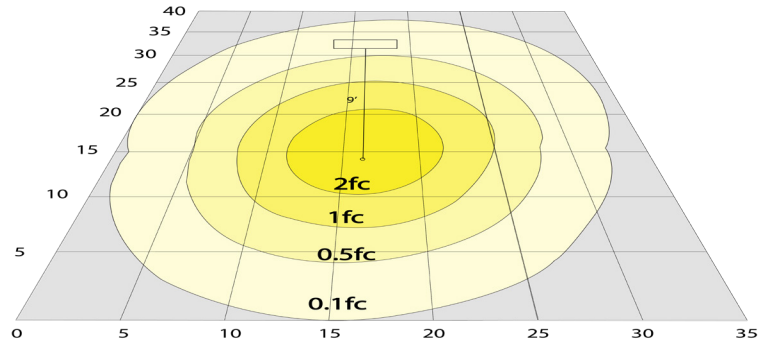


Simulation based on 5000K, Area 40'x 35' Mounting Height: 9'

Other Views:



Close-up View



Front View



Socket View

Performance Table: T8-EZ6-GS-3FT-12W

MODEL NO.	Wattage	Voltage	Lumens	Color Temp.	BUG Rating	LPW
T8-EZ6-GS-3FT-12W-40K-F	12W	120-277V	1560LM	4000K	B1-U3-G1	130
T8-EZ6-GS-3FT-12W-50K-F	12W	120-277V	1560LM	5000K	B1-U3-G1	130

Sample Ordering

Model Material Size Watt Color Temp. Lens Type

T8 - EZ6 - GS - 3FT - 12W - [] - []

40K = 4000K
50K = 5000K

Example:


1. T8-EZ6-GS-3FT-12W-40K-F

(FOR 12W 4000K T8 3FT TUBE LAMP 120-277V)

WIRING DIAGRAM:

Type B Tube

1 Type B Single End Tube: Only used in mains power. Remove ballast in retrofit project.




2 Type B Dual End Tube: Only used in mains power. Remove ballast in retrofit project.




Type A+B Tube

1 Type A mode: Dual End, only works with electronic ballast.



2 Type B mode:



1 Single End: Only used in mains power. Remove ballast in retrofit project.

2 Dual End: Only used in mains power. Remove ballast in retrofit project.

Other Models: T8-EZ6-GS-3FT-12W-C (Clear Lens)



Close-up View



Front View



Socket View