


Model (Triplex)	FLOW RATE IS PER TANK											Installation			Shipping Weight lbs	Operating Weight lbs			
	Capacity		Resin		Salt Usage		Critical			3"			Mineral Tank in	Brine Tank in			Height	Depth	width
	@6 lbs/ft3	ft3	lbs	ft3	@6 lbs/ft3	@10 lbs/ft3	Flow USGPM	@ 15 PSI USGPM	@ 25 PSI USGPM	To Drain USGPM	in	in							
@10 lbs/ft3	m3	kg	kg	l/s	l/s	l/s	l/s	l/s	mm	mm	mm	mm	mm	mm	mm	mm			
FHF 660-3B"	484,000	22	132	220	110	202	273	45	42 x 72	42 x 48	114	86	303	7,552	30,052				
FHF 720-3B"	594,000	0.62	59.89	99.82	6.94	12.74	17.22	2.84	1067 x 1829	1067 x 1219	2,883	2,184	7,696	3,426	13,635				
FHF 780-3B"	528,000	24	144	240	120	201	269	45	42 x 72	42 x 48	114	86	303	7,933	30,433				
FHF 900-3B"	648,000	0.68	65.34	108.89	7.57	12.68	16.97	2.84	1067 x 1829	1067 x 1219	2,883	2,184	7,696	3,599	13,808				
FHF 900-3B"	572,000	26	156	260	130	197	266	45	42 x 72	42 x 48	114	86	303	8,315	30,815				
FHF 900-3B"	702,000	0.74	70.78	117.97	8.20	12.43	16.78	2.84	1067 x 1829	1067 x 1219	2,883	2,184	7,696	3,773	13,981				
FHF 1020-3B"	660,000	30	180	300	150	213	284	60	48 x 72	48 x 48	113	91	336	9,629	37,229				
FHF 1020-3B"	810,000	0.85	81.67	136.12	9.46	13.44	17.92	3.79	1220 x 1829	1219 x 1219	2,858	2,311	8,534	4,369	16,891				
FHF 1020-3B"	748,000	34	204	340	170	208	280	60	48 x 72	48 x 48	113	91	336	10,392	37,992				
FHF 1020-3B"	918,000	0.96	92.56	154.26	10.73	13.12	17.67	3.79	1220 x 1829	1219 x 1219	2,858	2,311	8,534	4,715	17,238				
FHF 1080-3B"	792,000	36	216	360	180	205	276	60	48 x 72	48 x 48	113	91	336	10,774	38,374				
FHF 1080-3B"	972,000	1.02	98.00	163.34	11.36	12.93	17.41	3.79	1220 x 1829	1219 x 1219	2,858	2,311	8,534	4,888	17,411				
FHF 1740-3B"	1,276,000	58	348	580	220	220	295	108	63 x 86	70 x 58	115	106	447	22,056	76,356				
FHF 1740-3B"	1,566,000	1.64	157.89	263.16	13.88	13.88	18.61	6.81	1600 x 2184	1778 x 1473	2,908	2,692	11,354	10,007	34,644				

- LEGEND:**
- ⊗ ISOLATION VALVE
 - ⊗ BYPASS VALVE
 - ⊗ PRESSURE GAUGE & SAMPLE POINT
 - ⊗ OPEN DRAIN
 - * VACUUM BREAKER
 - RAW WATER LINES
 - FILTERED WATER LINES
 - WATER TO OPEN DRAIN
 - TREATED WATER LINES

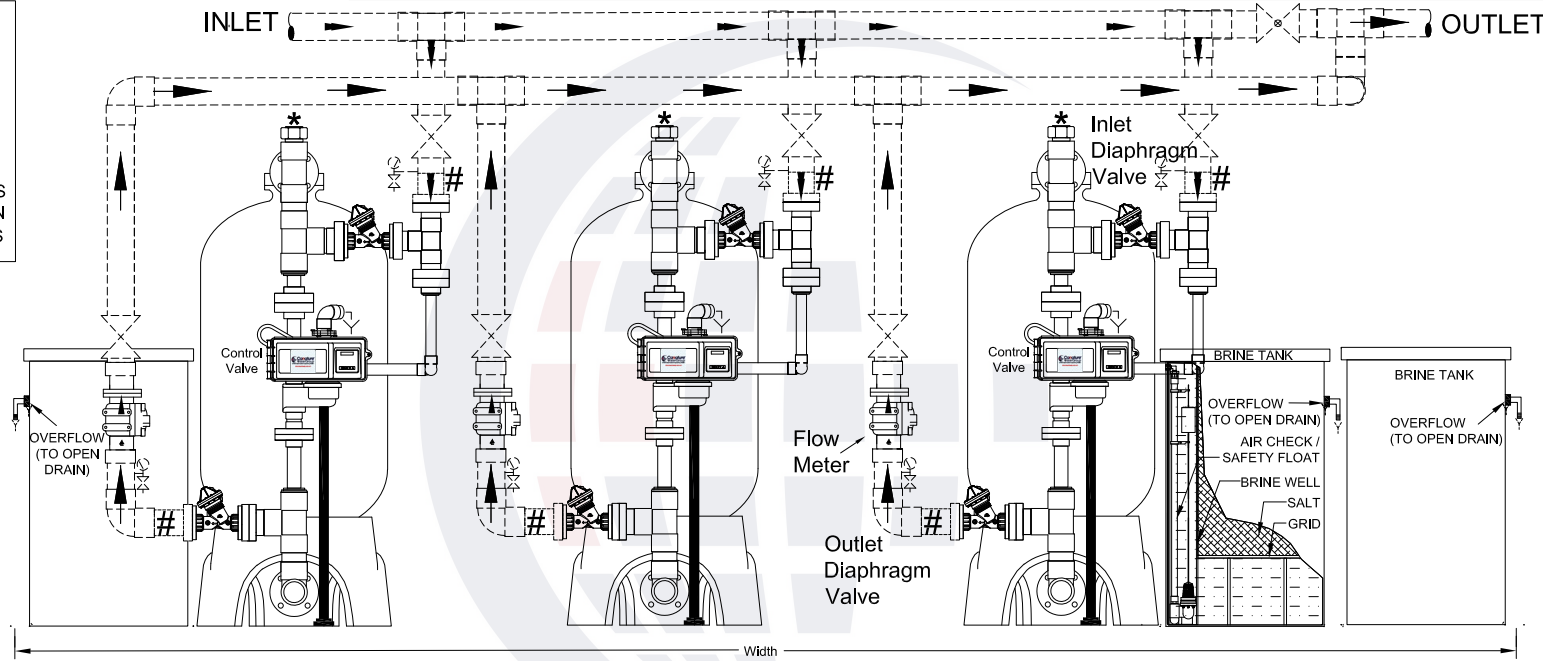

Model FHF1020-3B T8000

- NOTES:**
- SOFTENER IS EQUIPPED WITH A 115 VOLT, ELECTRONIC SIDE MOUNTED REGENERATION CONTROL VALVE WITH 3" SERVICE INLET AND OUTLET THERMOPLASTIC DIAPHRAGM VALVES.
 - SOFTENER MANIFOLD SUPPLIED (MINERAL TANK TO THE DIAPHRAGM VALVES) IS SCH 80 PVC.
 - FIBERGLASS MINERAL TANKS AND MEDIA ARE NSF APPROVED
 - FIBERGLASS MINERAL TANKS ONLY ARE RATED FOR MAX PRESSURE 150 PSI(1034 KPa)
 - DUE TO SLIGHT EXPANSION AND CONTRACTION OF MINERAL TANK, PIPING MUST BE DESIGNED TO ALLOW SOME MOVEMENT. AS WELL AS BE PROTECTED FROM VACUUM. FLEX CONNECTORS(#) AND A VACUUM BREAKER (*) MAY BE REQUIRED. ***FAILURE TO INSTALL EITHER OF THEM OR IMPROPERLY INSTALL THEM MAY VOID THE TANK WARRANTY. COMPLETE UNIT WARRANTY DETAILS ON DOCUMENT #80150800 AVAILABLE ON THE WEB SITE.
 - MAXIMUM RECOMMENDED OPERATING LIMITS ARE 100 PS (690 kpa) AND TEMPERATURE 90° F (32°C).
 - ALL EXTERNAL AND INTERCONNECTING PIPING, FITTINGS, ISOLATION / BYPASS VALVES, PRESSURE GAUGES, SAMPLE POINTS, FLANGES & UNIONS ETC SHOWN BY BROKEN LINES ARE SUPPLIED BY OTHERS
 - SOFTENER UNITS FHF 570 AND LARGER REQUIRE 1" PVC BRINE LINE PIPING NOT SUPPLIED. (BY OTHERS)
 - SYSTEM MUST BE INSTALLED TO COMPLY WITH ALL FEDERAL, STATE, PROVINCIAL, AND LOCAL CODES.
 - ALL PIPING MUST BE PROPERLY SUPPORTED AND BRACED TO HANDLE THE THRUST OF THE CHANGE OF WATER FLOW (BY OTHERS).
 - FLOOR DRAINS MUST BE SIZED TO CARRY THE MAX. LISTED FLOW TO DRAIN.
 - DIMENSIONS SHOWN ARE THE ***MINIMUM*** REQUIRED. THIS INCLUDES ONLY 6" (153 mm) IN FRONT OF THE SYSTEM AND BETWEEN MINERAL TANKS. THIS ALSO INCLUDES ONLY 3" (76 mm) AROUND THE BRINE TANKS. MORE SPACE IS RECOMMENDED FOR EASY MAINTENANCE. **FOR PIPING CLARITY, EXTRA DISTANCE SHOWN BETWEEN MINERAL TANKS**
 - REFER TO THE INSTALLATION AND OPERATION MANUAL FOR FURTHER DETAILS.

- SYSTEM HAS NO RAW WATER BYPASS DURING REGENERATION AS STANDARD.
- MULTI TANK SOFTENER, IMMEDIATE METER INITIATED.
- DEMAND RECALL SYSTEM. ONE UNIT ALWAYS ON LINE. OTHER UNIT(S) ARE BROUGHT ON LINE BASED ON TOTAL SYSTEM FLOW RATE. UNITS
- SYSTEM INTERLOCKED TO ONLY ALLOW ONE UNIT TO REGENERATE AT A TIME

**HIGH FLOW FHF SERIES SOFTENER
3-2 TRIPLEX DEMAND RECALL SYSTEM**

THIS DOCUMENT CONTAINS INFORMATION WHICH IS PROPRIETARY TO CANATURE WATERGROUP. THE REPRODUCTION, TRANSFER, OR OTHER EXPLOITATION OF ANY INFORMATION CONTAINED HEREIN IS NOT PERMITTED WITHOUT PRIOR WRITTEN APPROVAL OF CANATURE WATERGROUP. THE MANUFACTURER RESERVES THE RIGHT TO MAKE PRODUCT REVISIONS, WHICH MAY DEVIATE FROM THE SPECIFICATIONS AND DESCRIPTIONS STATED HEREIN WITHOUT OBLIGATION TO CHANGE PREVIOUSLY MANUFACTURED PRODUCTS OR TO NOTE THE CHANGE. NOT DRAWN TO THE SCALE UNLESS OTHERWISE SPECIFIED.

Project _____	Date 23/04/024	Rev _____
Dwg # FHF 3-2 T		0

