Galanz

REFRIC	GERATOR
INSTRUCTION	MANUAL

Model No.: GLR10TBKF GLR10TWEF GLR10TS5F

To ensure proper use of this appliance and your safety, please read


the instruction manual completely before operating this appliance.

CONTENTS

Names of the parts

Names of the parts1
Safety warnings2
Installation instructions
Reverse and install the doors3
Operation instructions7
Instruction for usage7
Packing and moving8
Maintenance8
Defrost
Disconnecting the appliance8
User notifications
Trouble shooting tips9
Specifications and parameters10
Packing list10
 Thank for purchasing our products and thank you for placing your confidence in us.
Please read this manual carefully before using. Follow instructions and keep it for future reference.
• Please follow the operating instructions and safety notices in the manual.
 If any trouble arise, do not fix it yourself or hand it to the after sales service center which has not been authorized. Please contact the local authorized service center.

NAMES OF THE PARTS



1.Shelves	5.Vegetalbe
2.Wind tunnel knob	6.Rod
3.Lamp and temperature Control button	7.Cola bar
4.Crisper glass cover	8.Bottle protector

- The refrigerator you purchased may be improved, which maybe not completely consistent with the manual, However the functions and operating methods will not change. Please feel free to use!
- If you use the refrigerator for the first time, remove the adhesive tapes of the drawers, balconies, egg tray, and the drain tube plug.
- Do not pull or push the drawers and balconies fiercely during use in case of damage.
- Adjusted the temperature control as higher as you could accept, which will save the energy consumption of the refrigerator and your money;
- Don't open the refrigerator door continually if it is in the normal working situation.
- Keep the combination of drawers, baskets and shelves of the refrigerator is consistent with its original standard.

1

SAFETY WARNINGS

For ensure your personal safety, please follow the points below:

- 1. The circuitry for refrigerator must be isolated. The area of cross section of wire must be larger than 0.75mm². The power plug should have its own socket, the socket must be ground as adapter may cause the socket to overheat.
- 2. The voltage and frequency of this product should be 115VAC/60Hz.
- 3. Do stop the power only by pulling the power plug out of the socket directly but not by the wire.
- 4. Do not damage the refrigerant circuit.
- 5. This appliance is not intended for use by persons(including children) with reduced physical, sensory or mental capabilities, or lack of experience and knowledge, unless they have been given supervision or instruction concerning use of the appliance by a person responsible for their safety.
- 6. Children should be supervised to ensure that they do not play with the appliance.
- 7. Keep ventilation opening, in the appliance enclosure or in the built in structure, clear of obstruction.
- 8. Before you throw away your old refrigerator or freezer. - Take off the doors; - Leave the shelves in place so that children may not easily climb inside.
- 9. Do not store explosive substances such as aerosol cans with a flammable propellant in this appliance. This appliance is intended to be used in household and similar applications such as
- -staff kitchen areas in shops, offices and other working environments; -farm houses and by clients in hotels, motels and other residential type environments; -bed and breakfast type environments; -catering and similar non-retail applications.
- 10. Do not use electrical appliance inside the food storage compartments of the appliance, unless they are of the type recommended by the manufacture.
- 11. This appliance can be used by children aged from 8 years and above and persons with reduced physical, sensory or mental capabilities or lack of experience and knowledge if they have been given supervision or instruction concerning use of the appliance in a safe way and understand the hazards involved. Children shall not play with the appliance. Cleaning and user maintenance shall not be made by children without supervision.

NOTICE:

- 1. When gas leaks from its container, don't pull the plug, out or in, for it may arouse sparks and fire calamities.
- 2. Don't splash water on the rear of the appliance, for it may cause malfunction or electric shock.
- 3. Don't stor inflammabe materials such as ether, benzene, LP gas and glue etc in the refrighterator.
- 4. Don't place bottled beverage in the freezer, so as to prevent breaking.

2

- 5. It is better not place object on the top of appliance which is magnetic, heavy, or be filled with water. Electronic components may not work steadily if water gets inside. Do not store object which is costly or impressible to temperature and , e.g. serum, bacterin and so on.
- 6. The refrigerant of this product is R600a, which is inflammable. So, make sure not to damage the cooling system during the transportation and installation 0

F§?

b

7. DISPOSAL:Do not dispose this product asunsorted municipal waste.Collection of such wasteseparately for special treatment is necessary.


INSTALLATION INSTRUCTIONS


- 1. The refrigerator should be located in a completely flat surface . Leave 5~10 cm between each side of the appliance and the wall, and leave 30 cm between the top of the appliance and the ceiling.
- 2. Choose a location which is not exposed to sunlight high temperature or humid, as humidity maycause stain.
- 3. Pulled out the bottom panel before installation.
- 4. The appliance can be adjusted by rolling its two legs in front the bottom when it is unstable. Rolling in clockwise can rise up the machine.
- 5. The location should be firm and flat. An un-securely position may cause noise and libration: (a)The noise may be increased if the floor is not firm. (b) Put a sheet under the appliance for solving the heat emission if you need to locate it onto a carpet.
- 6.Make sure the adjustable legs are clung to the floor, and set the appliance slope backward slightly for keeping the doors closed tightly.

REVERSE AND INSTALL THE DOORS


You can choose to open your refrigerator by the right side or the left one. To change the way of opening, please follow the below instructions Important safety warning: before doing so please unplug and disconnect the appliance Except the Accessories packed, you still need : Medium-sized cross screwdriver Small screwdriver A solid line One more person who can help you would be better. 1. Firstly, you need to check if the power connect or not. 2. Open the upper door, and close the bottom door.

3







- 3. Take off the protective covers with a Phillips screwdriver through the back side, and save the protective covers.
- 4 Take off the 3 shelf-tapping screws, and save them.
- 5. Push the top hinge forward, remove the door and save it aside.

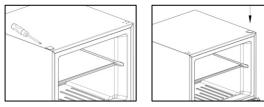

6.Pry off the screw cover on the top left side of the refrigerator to uncover the scres holes.

7 Replace screw cover on the top left side of the refrigerator to the right top to cover the holes. Cover si also force-fitted.



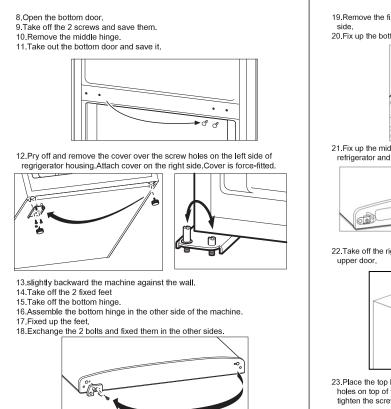


19.Remove the fixed plate of hinge on the bottom door, and fix it on the other

20.Fix up the bottom door on the outside bolts.



21.Fix up the middle hinge on the bottom door, position it on left side of the refrigerator and reattach with two screws.



22. Take off the right door closer and fix the left closer in the other side of the



23.Place the top hige on top of the freezer door and line up the top hinge with holes on top of the refrigerator. Use three screws to replace the hinge. Then tighten the screws. Force-fit protective covers over top hinge.

6

OPERATION INSTRUCTIONS

PLACEMENT OF FOOD

1. There should always be some space between items inside for air circulation.

66

Ð

2.Food should be kept in sealed package to avoid becoming drv or with odour.

3.Hot food should be cooled down before placing into the appliance. Otherwise, interior temperature and electronic consumption will increase.

4.Reduce the frequency of door opening can efficiently low down the electronic consumption.

Warning Do not use any electronic equipment inside the appliance.

INSTRUCTION FOR USAGE

REFRIGERATOR CONTROL

The temperature of refrigerator can be controlled manually by the display. However, the number shown on the display does not directly represent the temperature. Instead, the larger the number is the lower the interior temperature will be. Initially set the refrigerator control on the middle setting(number 3). If you want to set the refrigerator temperature to a coulder temperature pressing the set button until the state on 4 or 5. Each time the set button is pressed, the state increases by 1. When the state is in the highest state, press the button again and return to the first state.



FREEZER CONTROL

If the refrigerator's lower tempreature is needed, please regulate the konb along the "COLDER" direction; contrarily, regulate the konb along the "COLD" direction. Note: Regulate the konb to set the freezer temperature as you desire. Always wair 24 hours after any adjustment to reach the desired temperature.



PACKING AND MOVING

- 1. Unpack, repack and carry
- Please memorize the position of each accessory of the appliance when unpack it, repack the product and check it carefully before transportation
- 2. Do not lift or pull the door or the door handle during transportation.
- 3. When moving, the appliance can not be sloped over 45 degrees (the angle to the vertical direction). Please avoid strong vibration and hit

MAINTENANCE

- The appliance should be maintained and cleaned frequently. For your safety, do please pull the plug out of the socket before the cleaning.
- 1. Interior maintenance Clean the interior of the appliance with clean water or neutral abluent. Scour it with
- clean water and wipe it with a piece of dry cloth. 2. Maintenance of door gasket
- It is easy to damage if the door gaskets are polluted by the stain like oil, sauce and etc., so it is better to clean them carefully
- 3. Outer maintenance
- Wipe the dusty with a piece of dry cloth ,clean it with neutral abluent if necessary.

DEFROST

Defrost of refrigerator will be executed automatically during product running, so it is no requirement for manual defrost. The defrost water flows into the vaporization plate and will be vaporized by the heat of compressor. So its drain tube must be cleaned.

Marning Do not use mechanical devices or other means to accelerate the defrosting process, other than those recommended by the manufacturer

DISCONNECTING THE APPLIANCE

After power failure, even in summer, the refrigerator can store food normally in several hours.

- 1. Discontinuation during power failure
- After power failure, do not put additional food in the appliance and reduce the frequency of door opening. Make several ices in a container if know the power failure beforehand, and put it in the top of the fridge.
- 2. Discontinuation during vacation Please fetch out the easy-rot food and the food in fridge before shot vacation. After confirmation, close the door firmly. If have a long vacation, please fetch out all the food and cut off the power. After defrosting, clean up the liner of the appliance and wipeit dry, and leave the door open.
- Stop using

If the refrigerator may be stopped using for a long time, please unplug the outlet and clean up the appliance. The door should be kept open in order to prevent unpleasant smell caused by food leavings.



	a general condition, do not stop the appliance in case of affecting s life. After unplugging the power, please leave at least 5 minutes efore resumption.	1.
	TIFICATIONS	2.
		3.
	ater on the refrigerator, as it will cause oxidation and malfunction. ponent such as on/off button should be wiped dryly.	4.
cloth, thinner, a	n as soap powder, abrasive cleaning powder, alkali cleansers, chemical lcohol, acid petroleum productand hot water should not be used to erator as they may damage the painted cover and plastics.	
3. Smear can dam	nage the interior plastic component, so wipe it as soon as possible.	
	e points below after maintenance: y damage or loss of the electronic wire ?	
	ig be put in the socket reliably and smoothly?	
(3) Is the plug I	heating unconventionally?	
	Please get rid of the gasket of the door before the disposal. The disposed apparatus should be handled by professional	
s vianning s	staff, as it may be harmful to the environment.	
low.	nnected to the power supply(plug, power cut or fuse); Voltage is too	
	does not work efficiently as expected d by heavy frost, or by warm temperature setting, or by frequently door	
3. It makes unusua		
	d by an imbalance or loose ground locating the appliance, or by een the appliance and other ambient objects.	
	keeps working for a long period	
	t temperature may be too high. The doors may be opened frequently left open. The temperature control knob setting in $(4-5)$ state may	
or even they are	It temperature may be too nigh. The doors may be opened frequently left open. The temperature control knob setting in (4-5) state may 'king time of compressor.	
or even they are increase the wor 5. Disgusting odou	left open. The temperature control knob setting in (4-5) state may king time of compressor. r happens	
or even they are increase the wor 5. Disgusting odou Food with strong	left open. The temperature control knob setting in (4-5) state may rking time of compressor.	
or even they are increase the wor 5. Disgusting odou Food with strong Please check wh for a long time. 6. Water leaks from	left open. The temperature control knob setting in (4-5) state may king time of compressor. Ir happens o dour should be packed tightly before being put inside the appliance. ther there is any deteriorated item or whether the liners are left dirty in the bottom of the refrigerator	
or even they are increase the wor 5. Disgusting odou Food with strong Please check wh for a long time. 6. Water leaks from The drain tube is	left open. The temperature control knob setting in (4-5) state may 'king time of compressor. Ir happens o dour should be packed tightly before being put inside the appliance. ther there is any deteriorated item or whether the liners are left dirty In the bottom of the refrigerator jammed. Please use a proper tool to solve it.	
or even they are increase the wor 5. Disgusting odou Food with strong Please check wh for a long time. 6. Water leaks from The drain tube is 7. Heavy frost occu	left open. The temperature control knob setting in (4-5) state may king time of compressor. Ir happens o dour should be packed tightly before being put inside the appliance. ther there is any deteriorated item or whether the liners are left dirty in the bottom of the refrigerator	

9

caused by the heavy environment moisture.

low cases are not malfunction

- may form dew on the outside of the product during the humid season, just
- f refrigerant through the pipeline coil can cause a bicker.
- al that the sides of product get warm as a result of the cooling pipeline working.
- e of the appliance will be warm during working by the defrost pipeline inside it.

eck the points above first.

ply cord is damaged, it must be replaced by the manufacturer, agent or similarly qualified persons in order to avoid a hazard.

IFICATIONS AND PARAMETERS

Climate class		т
Electric shock protection type		I
Conceity (ou ft)	Freezer	2.47
Capacity (cu.ft)	Refrigerator	7.52
Voltage (V)		115
Frequency (Hz)		60
Current (A)		1.2
Voice [dB(A)]		≤ 45
Energy consumption (kW.h/24h) Refrigerant Weight (lbs)		0.9
		R600a/1.41oz
		123.5
Interior	Freezer	≤ 5
temperature (F)	Refrigerator	32~46.4
	Width	23.58
Dimension (inch)	Depth	25.71
	Height	59.72

KING LIST

3pcs 1pcs 1pcs	subject to improve from time to time, any changes in parts without further notice.
1pcs	changes in parts
	without further notice.
4pcs	
2pcs	
2pcs	
1pcs	
	2pcs