

Beach

L I G H T I N G

2021 SUPPLEMENT




3.5" LED Regressed Fixture

Gimbal or fixed

Anti-glare, the light is the perfect choice for residential or commercial lighting applications.
Ideal for sloped ceilings, wall washing, highlight artwork, task or general lighting etc.



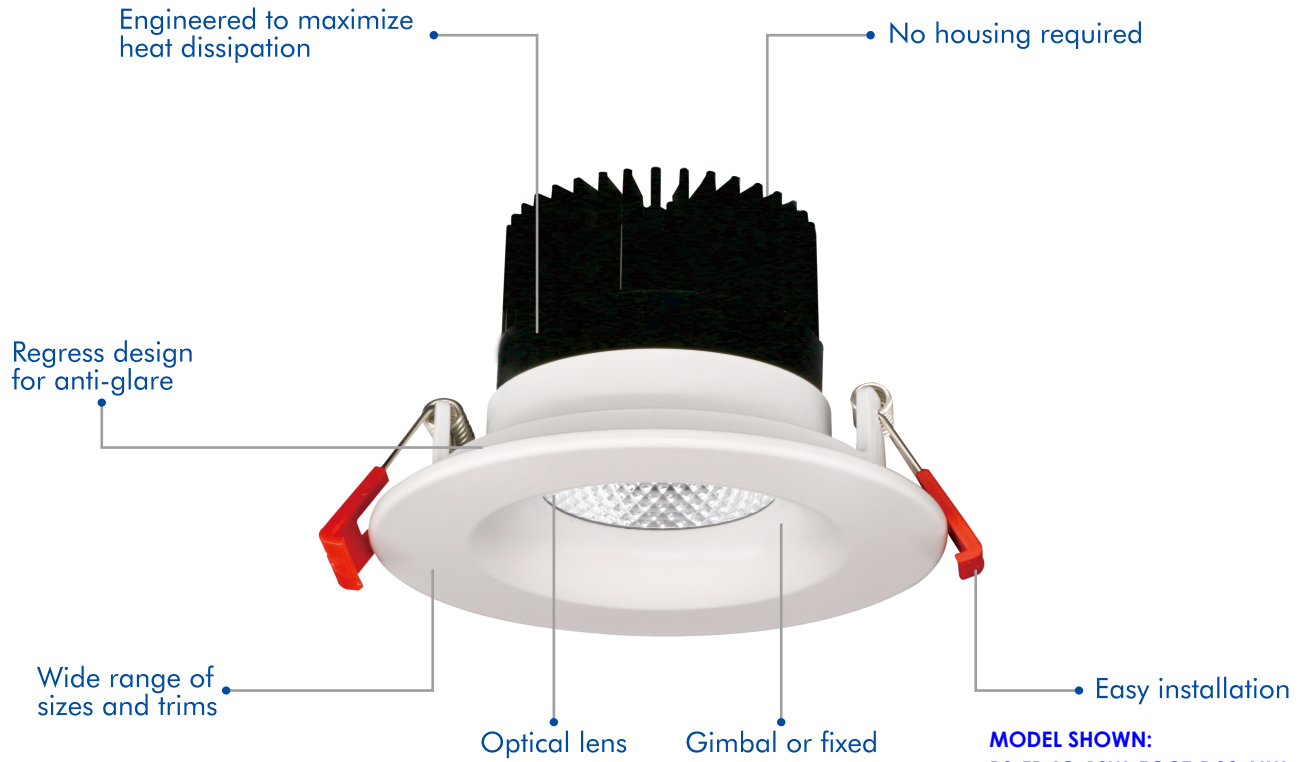

MODEL SHOWN:
R3.5R-IC-12W-5CCT-D90-MW

AVAILABLE:
R3.5RG-IC-12W-5CCT-D90-MW
R3.5S-IC-12W-5CCT-D90-MW
R3.5SG-IC-12W-5CCT-D90-MW

Styles



Sizes


3.5"
Ø111mm
12W
800Lm

- Durable aluminum body with adjustable gimbal or fixed aluminum body
- It is a high-performance, easy to install residential or commercial grade downlight solution that offers good light output, energy-efficiency and streamlined design
- Input voltage: AC 120V 50/60Hz
- Fast & easy to install-save on labour
- Color rendering index: 90
- 100%-10% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers
- Lifetime rated for greater than 50,000 hours
- Beam angle: 40°





R3.5-277V

Optional 277V power supply

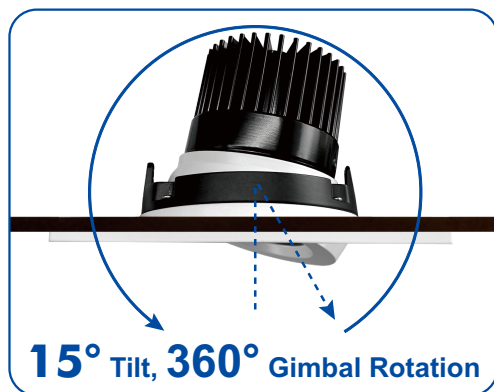


Dimensions



R3.5R-12W-3D90-MW

Installation (Spring Clips)

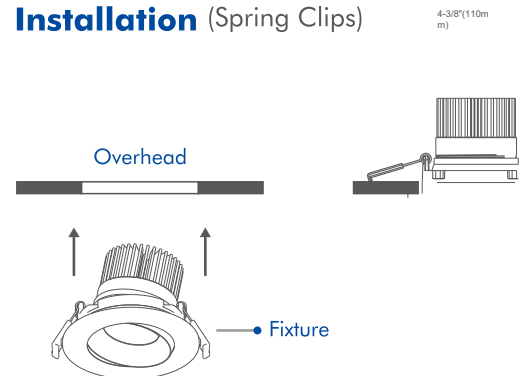

See Page 8 for New construction plates

RA3.5RTL-PIC-12W-5CCT-D90MW



<div style="border: 1px solid black; border-radius: 15px; background-color: #0056b3; color: white; padding: 10px; width: 60px; height: 60px; display: flex; align-items: center; justify-content: center; margin: 0 auto;"> 12_w </div> <p style="text-align: center; font-size: 10px;">Wattage</p>	<div style="border: 1px solid black; border-radius: 15px; background-color: #0056b3; color: white; padding: 10px; width: 60px; height: 60px; display: flex; align-items: center; justify-content: center; margin: 0 auto;"> 800_{Lm} </div> <p style="text-align: center; font-size: 10px;">Lumens</p>	<div style="border: 1px solid black; border-radius: 15px; background-color: #0056b3; color: white; padding: 10px; width: 60px; height: 60px; display: flex; align-items: center; justify-content: center; margin: 0 auto;"> 38° </div> <p style="text-align: center; font-size: 10px;">Beam Angle</p>	<div style="border: 1px solid black; border-radius: 15px; background-color: #0056b3; color: white; padding: 10px; width: 60px; height: 60px; display: flex; align-items: center; justify-content: center; margin: 0 auto;"> 80_{CRI} </div> <p style="text-align: center; font-size: 10px;">Color Rendering Index</p>
--	---	--	--

Trim Options

White

See Page 9 for New construction plates

Features

- **Adjustable CCT: 2700K, 3000K, 3500K, 4000K or 5000K**
- Flange less installation, provide a more high end looking
- The lamp body is made of aluminum and the heat sink is molded through die-casting and excellent thermal design
- The half-tone pre-buried frame design, flat plaster ceiling after the trim less installation and good anti-glare, setting off a warm and comfortable atmosphere
- It is a high-performance, easy to install residential or commercial grade down light solution that offers good light output, energy-efficiency and streamlined design
- Input voltage: AC 120V 50/60Hz
- Fast & easy to install-save on labor
- I.C. rated for direct contact with insulation
- No housing required
- LED technology fits anywhere you need general light source
- 100%-10% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers
- Lifetime rated for greater than 50,000 hours
- Anti-glare design



Back View

4" LED Regressed Downlight Module - CCT Tunable

CCT adjustable between 2700K, 3000K, 3500K, 4000K and 5000K. Interchangeable trims, offer a variety of shapes & finishes, give you many options to choose


Ideal for sloped ceilings, wall washing, highlight artwork, task or general lighting etc.



RA4-IC-15W-5CCT-D90



Universal LED Module

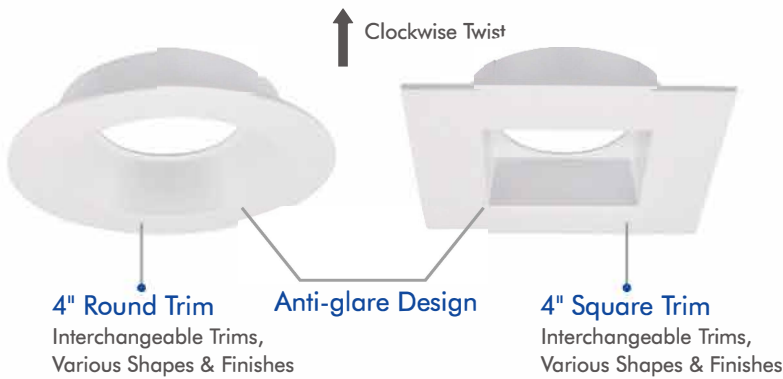

RA4-RT-MW Round Matte White


RA4-RT-MBK Round Matte Black

RA4-ST-MW Square Matte White

RA4-ST-MBK Square Matte Black

15_W	1000_{Lm}	40°	80_{CRI}
Wattage	Lumens	Beam Angle	Color Rendering Index


Dimensions

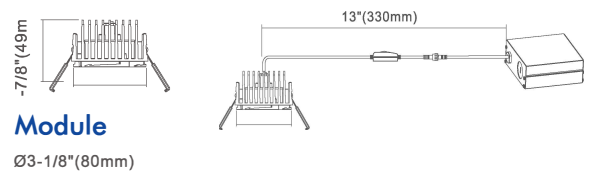

Features

- **Adjustable CCT: 2700K, 3000K, 3500K, 4000K or 5000K**
- Interchangeable trims
- Made of durable aluminum
- Available shapes: round and square
- It is a high-performance, easy to install residential or commercial grade downlight solution that offers good light output, energy-efficiency and streamlined design
- Input voltage: AC 120V 50/60Hz
- Fast & easy to install-save on labor
- I.C. rated for direct contact with insulation
- No housing required
- LED technology fits anywhere you need general light source
- 100%-10% dimming capability, this fixture is compatible with industry standard TRIAC/ELV dimmers
- Lifetime rated for greater than 50,000 hours
- Anti-glare design

Installation (Spring Clips)

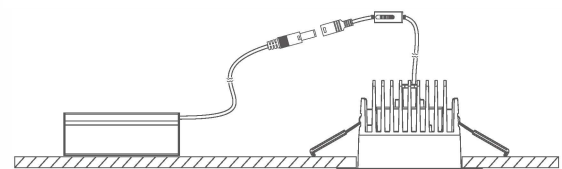

Cut out: 3-3/4" (95mm) LED Module and Driver

See Page 9 for New construction plates

6" LED Regressd Downlight Module - CCT Tunable

CCT adjustable between 2700K, 3000K, 3500K, 4000K and 5000K. Interchangeable trims, offer a variety of shapes & finishes, give you many options to choose
Ideal for sloped ceilings, wall washing, highlight artwork, task or general lighting etc.

Downlight



RA6-PIC-24W-5CCT-D90



No Housing Required

Universal LED Module

RA6-RT-MW



6" Round Trim
Interchangeable Trims,
Various Shapes & Finishes

RA6-ST-MW



6" Square Trim
Interchangeable Trims,
Various Shapes & Finishes

↑ Clockwise Twist

Anti-glare Design



24_W

Wattage



1800_{Lm}

Lumens




40°

Beam Angle



90_{CRI}

Color Rendering Index

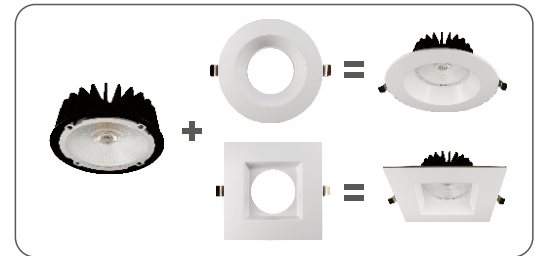


Features


- **Die-Casted Interchangeable Trims**
- Round or Square, White or Black
- High performance Commercial Grade Fixture
- Fast & Easy to Install - Save on Labour
- IC Rated for direct contact with insulation
- No Housing Required
- Dimmable down to 10% with most standard Triac & ELV dimmers
- 50,000 hours life
- 5 Years Warranty
- Cut out Ø158mm

See Page 9 for New construction plates


Dimensions

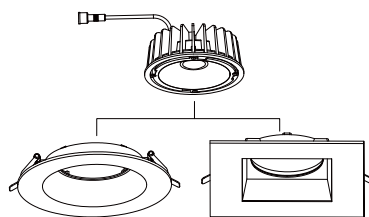

Module

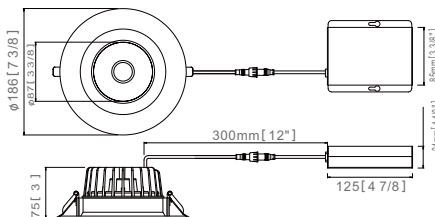

6" Round

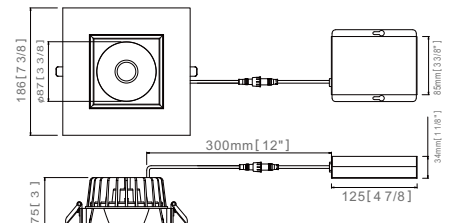

6" Square

T4 Series. 90 Degree and 360 Degree rotation



T4S-IC-7W-3D90-MW



T4R-IC-7W-3D90-MW

3.5 Inch
Square or Round
7watt
500 Lumens
New construction plate
R3.5-NC



T4S2-IC-12W-3D90-MW

Double
Rectangular
12 watt
850 Lumens
Remodel Applications only



T4S3-IC-15W-3D90-MW

Triple
Rectangular
15 watt
1300 Lumens
Remodel applications only



T4S4-IC-20W-3D90-MW

Quad
Square or Round
20 watt
1400 Lumens
Remodel applications only

NEW

Compatible New Construction Plates


R3.5-NC



3.5 Inch New construction Plate

Compatible with R3.5 Series

RA3.5 Series

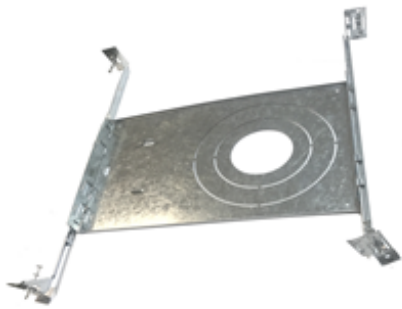

R2.5-4-6-NC

Adaptable New Construction Plate

3-4 and 6 Inch compatibility

Compatible with RA4 Series

RA6 Series

Features:

- Standard CSA C22.2 NO.141、UL924、IP65
- Selectable emergency power 15W, 30W.
- Universal input (100-347VAC)
- Built-in Lithium Battery
- Battery protections: over charge protection, over discharge protection, short circuit protection
- The batteries meet 500 cycles of standard charge and discharge
- Silicone potted
- Waterproof Rate: IP65



Specifications

Universal Input Voltage
 100-347AC, 50/60Hz
 AC Input Current
 100mA max
 AC Input Power Rating
 7.0W max
 Emergency Time
 90 Minutes
 Full Warranty
 5 Years
 Output Voltage
 50-150VDC

Test Switch/Charging Indicator Light
 Low Voltage, Illuminated Test Switch
 Battery Charging Current
 $\leq 250\text{mA}$
 Recharge Time
 $\geq 24\text{Hours}$
 Temperature Rating (Ambient)
 Li-ion 0°C to 50°C (32F to 122F)

Output Power	15W	30W
Battery Li-ion battery	14.8V/2000mAh	29.6V/2000mAh

****CONSULT FACTORY FOR COMPATIBLE ITEMS****

