THE TELECOMLINE SERIES

12-00050

Modem protection 2 wire/ISDN




Features

- Fully graded protection
- Compact design
- High discharge current capability
- Easy installation

An in-line protection device for use with modems, digital communicators, alarm panels, cordless phones and other line equipment. The BT version is suitable for ISDN applications.

Specifications	
	Minitel
No of pairs	1
Input connector	RJ11 Female
Output connector	RJ11 Male
Max operating voltage	+/-230V dc
Max discharge current (Differential mode)	10kA
Max discharge current (Common mode)	10kA
Residual voltage (Differential mode)	Approx. 40V
Residual voltage (Common mode)	Approx.100V
Data speed	64kbits/600Ω
Temperature range	-20 C to +70 C

Dimensions(mm)

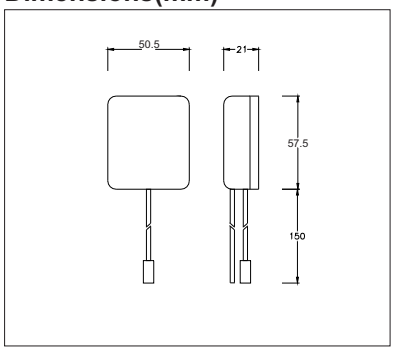

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd
Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa
P.O. Box 5985, Halfway House, 1685
Tel: +27 (0) 11 848-1100
Fax: +27 (0) 11 314-3880
E-mail: info@clearline.co.za
www.clearline.co.za

CLEARLINE
THE ELECTRONIC PROTECTION COMPANY