THE DUOLINE SERIES

12-00259

ISDN USB Protector



Features


- Mains & Telecom on one equipotential platform
- Earthed automatically via the mains plug
- 2 Stage protection
- Compact design
- Surge protection
- Failsafe protection

This Duo ISDN protection device offers a protected power outlet, and an ISDN protection module. The ISDN module is for the protection of an ISDN NT.

Specifications	
Power Module	
Max. continuous voltage	250V 50Hz
Max. continuous current	16A
Nom. discharge current ismax (8/20)	2.5kA
Max. discharge current ismax (8/20)	8kA
Resdiual voltage at ismax (8/20)	Approx. 900V
Response time	<25ns
Power connector	16A round pin
Standards compliance	IEC 99.4, ANSI C62.41

Specifications	
Telecom Module	
Max operating voltage	130V
Max. discharge current Differential mode	5kA (8/20)
Max. discharge current Common mode	10kA (8/20)
Residual voltage differential mode (1kV 1.2/50)	<300V
Residual voltage common mode (1kV 1.2/50)	<300V
Pairs protected	3,4
Response time	<10ns
Insertion loss in dB @ 100MHz into ohms	<0.,1dB
Connectors	RJ11
Data rate	10Mbits/s

Dimensions

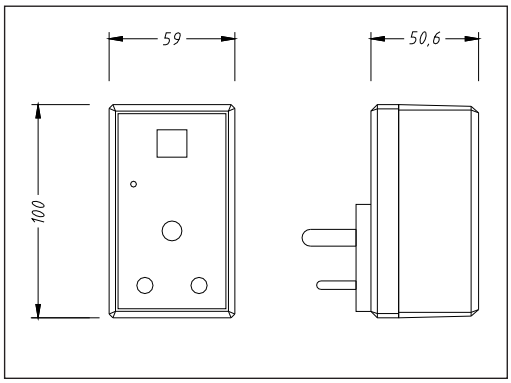

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd

Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa
P.O. Box 5985, Halfway House, 1685
Tel: +27 (0) 11 848-1100
Fax: +27 (0) 11 314-3880
E-mail: sales@clearline.co.za
www.clearline.co.za

CLEARLINE
ENGINEERED POWER SOLUTIONS