THE DATALINE SERIES

Coaxial network/CCTV protection

12-00199 / 12-00299




Features

- Low insertion loss
- High power capability
- Compact design


Coaxial protection for high speed data transmission lines. Siuitable for CCTV applications.
These devices exhibit negligable insertion loss and are fitted in line at the equipment connection.

Specifications		
Order Code	**12-00199**	**12-00299**
Max operating voltage	+/- 1.5V	1.5V
Max operating current	0.3A	0.3A
Max discharge current (Differential mode)	10kA.	10kA.
Max discharge current (Common mode)	10kA	10kA
Residual voltage	Approx. <10V.	Approx. 40V.
Differential mode at 5kA (8/20)	Approx. 120V	Approx. 120V
Insertion loss at 10MHz	0.8dB	0.8 dB
Connectors	BNC Female - Male	BNC Female - Female
Temperature range	- 10°C to 70°C	-10°C to 70°C

Dimensions

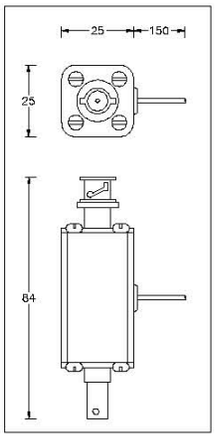

Attenuation Characteristics

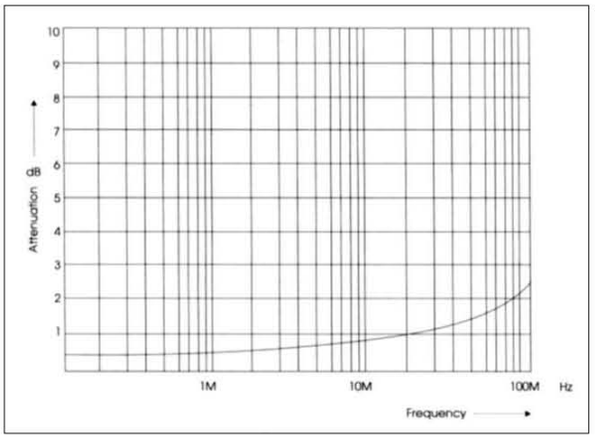

Designed and Manufactured by:
Clearline Protection Systems (Pty) Ltd
Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa
P.O. Box 5985, Halfway House, 1685
Tel: +27 (0) 11 848-1100
Fax: +27 (0) 11 314-3880
E-mail: sales@clearline.co.za
www.clearline.co.za

CLEARLINE
THE ELECTRONIC PROTECTION COMPANY