THE POWERLINE SERIES

12-00322 rev0

Office Pro

with USB charging and Surge Protection



Features

- Compact design
- Faster USB Charing Rate of 1A
- Surge protection and filtration
- Failsafe protection

This unit provides Protection for 4 AC Powered Devices. The unit will provide charging for up to 12 USB devices while also ensuring they are protected from surges. Line filtration has also been provided.

*Specifications subject to change without prior notice due to continuous improvements


Specifications	
Power Surge Protection	
Nom. Input Voltage	230VAC 50Hz
Max. Continuous Current	16A
Max. Discharge Current	8kA L-N, L-E, N-E (8/20us)
Residual Voltage	<900V
Response Time	<25ns
Input Connectors	16A 3Pin Plug

USB Ports	
Number of Ports	12
Max. Current per Port	1A
Connectors	USB A Socket


Filtration	
Filtration Performance	See graph below
Filtration dB / 100kHz	50dB
Filtration dB / 1MHz	60dB
Earth Leakage Current	<0.6mA

Other	
Indication	LED Lamp
Temperature Range	-20°C to +70°C
Standard Compliance	IEC 164-1, 61643-1, BC1.1
Power Lead Length	1.5m
Dimensions	480x100x60mm
Weight	1.8kg

Dimensions

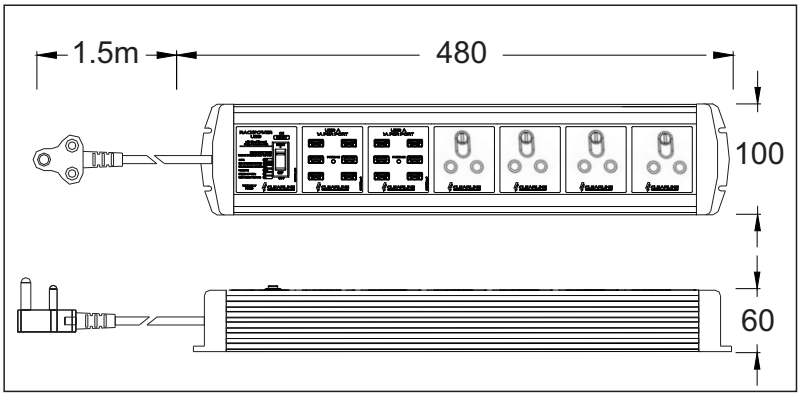

Filter Response

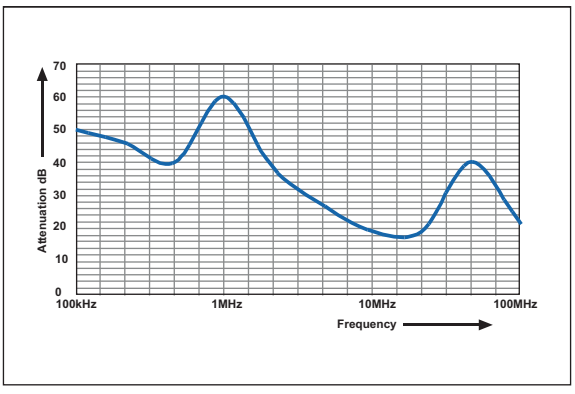

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd
385 Roan Crescent Corporate Park North, Old Pta Road,
Midrand, South Africa
P.O. Box 5985, Halfway House, 1685
Tel: +27 (0) 11 848-1100
Fax: +27 (0) 11 314-3880
E-mail: info@clearline.co.za
www.clearline.co.za

CLEARLINE
THE ELECTRONIC PROTECTION COMPANY