THE PROCESSLINE SERIES

12-00347

Series 30 RS485 High Speed




Features


- Din rail mount
- Compact design
- High density protection
- High surge capability
- Low residual voltage

Specifications	
Max operating voltage Vmax	5V
Max operating current	0.3A
Max discharge current ismax (Differential mode)	10kA
Max discharge current ismax (Common mode)	10kA
Residual voltage at ismax (8/20) (Differential mode)	Approx 10V
Residual voltage at ismax (8/20) (Common mode)	Approx 10V
Series resistance	3.3 ohms
Temperature range	0 to +70ºC

Dimensions

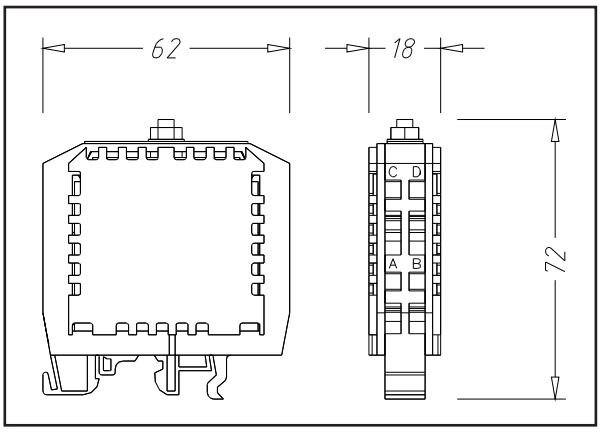

Schematic - Series 30 RS485

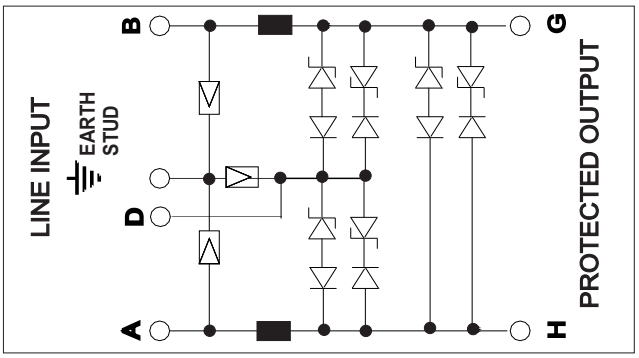

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd
Roan Crescent Corporate Park North, Old Pta Road, Midrand, South Africa
P.O. Box 5985, Halfway House, 1685
Tel: +27 (0) 11 848-1100
Fax: +27 (0) 11 314-3880
E-mail: info@clearline.co.za
www.clearline.co.za

CLEARLINE
THE ELECTRONIC PROTECTION COMPANY