THE DUOLINE SERIES

Television/Satellite Protection Systems

12-00593 rev0



*Specifications subject to change without prior notice due to continuous improvements

Features

- Plug-and-Play concept
- High surge capability
- Protection indication LED
- Fire hazard protection

Clearline protects your Television, Mnet, PVR, decoder, Satellite decoder and Blue Ray against lightning and surges without additional earthing.
Clearline protection modules have multiple stages of protection capable of blocking severe lightning and power surges.
The Clearline product incorporates a fast overload device which will be activated in extreme conditions. Functional indication lamp display the protection status of the unit.


Clealine's unique built-in thermal protection devices eliminates fire hazards.

Specifications	
Power Surge Protection	
Nom. Input Voltage	230VAC 50Hz
Max. Continuous Current	16A
Max. Discharge Current	8kA L-N, L-E, N-E (8/20us)
Residual Voltage	<900V
Response Time	<25ns
Input Connectors	16A 3Pin Plug
Output Connectors	16A 3Pin Socket

Antenna/CCTV Surge Protection	
Max. Discharge Current	2kA (8/20µs)
Residual Voltage	<100V, L-E
Response Time	<100ns
Frequency Response	3GHz
Connectors	F-Type

Other	
Indication	LED Indication
Temperature Range	-20°C to +70°C
Standard Compliance	IEC 164-1, 61643-1,
Lead Length	2x 1.0m F-Type Cable
Dimensions	100x60x50mm
Weight	0.355kg

Dimensions

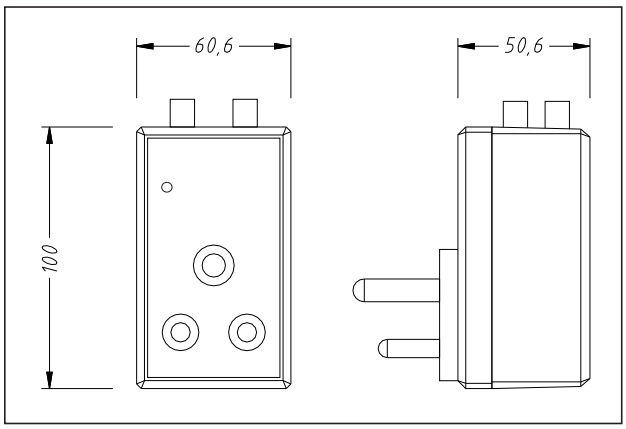

Designed and Manufactured by:

Clearline Protection Systems (Pty) Ltd
385 Roan Crescent Corporate Park North, Old Pta Road,
Midrand, South Africa
P.O. Box 5985, Halfway House, 1685
Tel: +27 (0) 11 848-1100
Fax: +27 (0) 11 314-3880
E-mail: info@clearline.co.za
www.clearline.co.za

CLEARLINE
THE ELECTRONIC PROTECTION COMPANY