

## Series 9200MP Flow Averaging Tube (FAT™)

**A leading manufacturer of Thermal Mass Flow Meters  
Since 1988.**

*Eldridge Products, Inc. has pursued innovation and excellence in thermal dispersion mass flow measurements since 1988. Thermal Mass Flow Meters offer simple, low cost operating for accurate, economical and reliable gas flow measurements for various applications - Compressed Air, Biogas, Natural Gas, Aeration, Digesters, Landfill, Wet Gas, HVAC systems - virtually any gas flow application. Master-Touch flow meters can solve your gas measurement challenges.*



**Master-Touch Series 9200MP Flow Meters are for use in hazardous area locations (Flame proof locations) Certified to CSA/CUS, ATEX, IECEx, KOSHA standards.**

**Insertion Style Thermal Mass Flow Meters** include a sensor & probe assembly that is inserted into the process gas flow conduit to allow the process gas to flow across the flow inlet tube. Our insertion style flow meters are available in 1/2" O.D. probe to 36", 3/4" O.D. probe to 60", or 1" O.D. probe 84". Optional mounting items- Tube fittings, flange, ball valve retractor. Large ducts or stacks may require multiple averaging tubes to achieve the very best accuracy. For problematic or unique installations, please consult our factory.

**Remote style thermal mass flow meters** utilize two enclosures. The probe enclosure is Explosion proof (Flame proof) rated for use in hazardous area locations. The enclosure is mounted directly to the insertion probe assembly. The enclosure contains the electrical connections, signal processing electronics and the LCD display, with programming keypad. The remote enclosure has a Type 4X rating and is usually placed in a readily accessible ordinary location. Optionally available, is an Explosion-proof remote enclosure. The enclosure contains the electrical connections, signal processing electronics, and the LCD display, with programming keypad. Only a four-wire, twisted-pair cable is required to carry the input power and flow signal between the two enclosures.

**SERIES 9200MP  
FAT**

### THERMAL GAS MASS FLOW MEASUREMENT APPLICATIONS-

Compressed Air Monitoring  
Ventilation Hood Alarms  
Bio / Digester Gas production  
Boiler Combustion Efficiency  
Pharmaceutical Clean Rooms  
Food Processing  
Wet Gas  
and many more.....

Natural Gas Consumption  
Water & Waste Aeration  
Landfill Gas Recovery  
Stack / Flue Gases  
Semiconductor Fabrication  
Nitrogen Purging  
Pulp & Paper Mills

# Master-Touch™

Flow Averaging Tubes ( FAT )



## Series 9200MP Flow Averaging Tube ( FAT )

### What is Flow Averaging Tube ( FAT )

Our patented Flow Averaging Tubes™ (FAT™) Thermal mass flow meters generally follow King's Law, and use the principle of convective heat transfer to directly measure mass flow, and are well suited to most applications with limited available straight run. In many installations, the up-steam straight run can be reduced to three diameters. The probe has a number of large diameter inlet ports along the length of the upstream impact surface. The pressure at each inlet port is average inside the tube to create the axial flow through the tube and across our flow sensor. The gas returns to the main flow stream through the ports located near the sensing elements. Anomalies in the actual flow profile or installations in non-circular ducts may still required some minor adjustment to achieve the best accuracy.

### Specifications

Linear signal output	0–5 Vdc & 4–20 mA (Flow and Temperature)
Event Relays (Two)	1 Amp @ 30 Vdc event selectable functions (see Manual)
Communication Protocols	RS232 & RS485 Modbus RTU or BACnet; Optional HART or Profibus DP
Display LCD 2-line 16-characte	Rate, Total, milliwatts, Temperature, Event
Accuracy including linearity (Ref.: 21°C)*	±(1% of Reading + 0.5% of Full Scale + GTC)
Repeatability	±0.2% of Full Scale
Sensor response time	1 second to 63% of final value
Turn down ratio	100:1; 10 SFPM (0.05 NMPS) Minimum Reading
Withstands Ambient temperature (electronics)	-40° to 158°F (-40° to 70°C)
Suitable Process Gas temperature range**	-40° to 392°F (-40° to 200°C)
Gas temperature coefficient (GTC)	0.02% Full Scale/°C
Gas pressure effect	Negligible over ± 50% of factory calibration pressure
Pressure rating maximum	500 PSI Std.
Input power requirement	6 Watts 24 Vdc @ 250mA 120 Vac 50/60 Hz optional 240 Vac 50/60 Hz optional
Flow Meter power requirements	5 watts maximum
Date/Time RAM Back-up	Lithium Button Cell, ten-year life, quantity 1
Wetted materials	316L Stainless Steel (Optional Hastelloy C276)
Standard temperature & pressure (STP)	70°F & 29.92" Hg (Air 0.075 lb./cubic foot) Optional 0°C & 1.0132 BarA (Air 0.081 lb./cubic foot) Or user specified STP at time of order
NIST traceable calibration	Yes

\* EPI is not responsible for measurement errors due to flow profile irregularities caused by installation, piping configurations, surface corrosion or scale, valve placement, etc.


\*\* Specify average process operating temperature, with high & low limits.

NOTE: Specifications subject to change without notice. Consult our web site, [www.epiflow.com](http://www.epiflow.com), at time of order.


NOTE: Eldridge Terms & Conditions for sales available on our web site, [www.epiflow.com](http://www.epiflow.com).

### Dimensional Specifications

Remote Electronics Enclosure

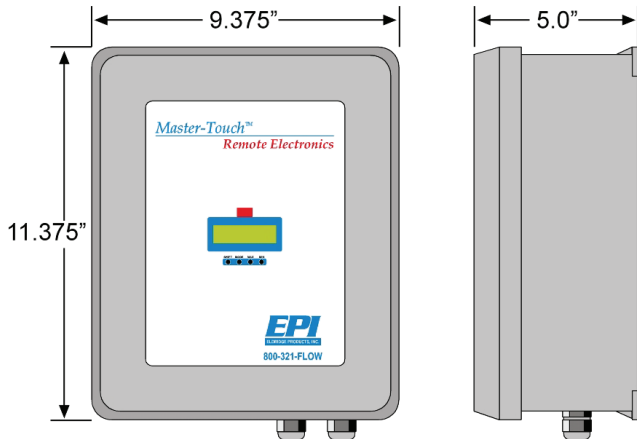

Flow Transmitter Assembly

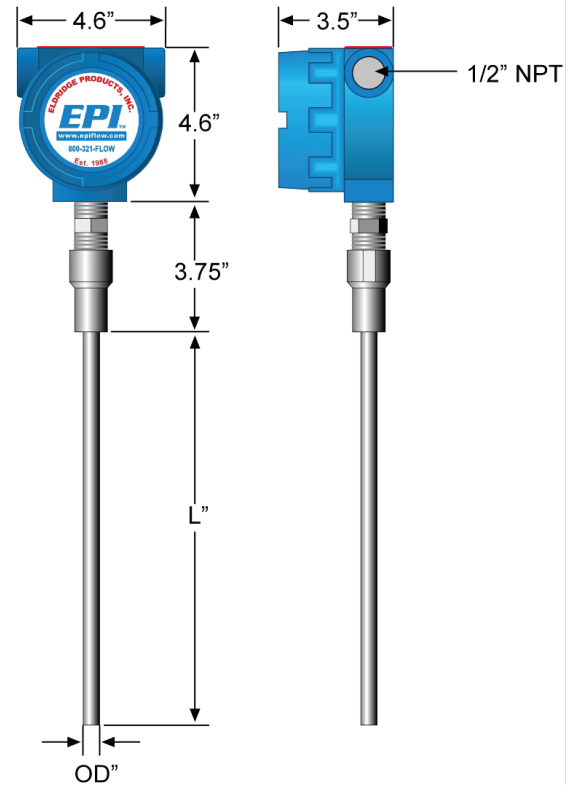

Model Number	OD"	Length
9240MP	1/2"	to 36"
9260MP	3/4"	to 60"
9280MP	1"	to 84"



Not available for Oxygen service.

### Certification Choices

**Flow Transmitter - CSA/CUS, ATEX, IECEX, KOSHA (specify preference at the time of order)**

**Remote Enclosure - CSA/CUS Non-Hazardous area location (Ordinary Locations)**

**Optional CSA/CUS, ATEX, IECEX, KOSHA (Specify preference at the time of order)**



**CSA/CUS**  
APPROVED INSTRUMENT  
For use in hazardous area locations; Class I Group B, C, D; Class II Group E, F, G; Class III; Encl Type 4X; Class I Zone I; AEx d IIB + H2 IP66; Ex d IIB + H2 IP66; T2 or T3 or T4 as marked; Ta = 0°C to 50°C  
Consult Factory for T3 or T4



**IECEX**  
APPROVED INSTRUMENT  
For use in hazardous area locations; T2 or T3 or T4 as marked; Ta = 0°C to 50°C; Ex d IIB + H2 T2...T4 Gb IP66; Ex tD A21 IP66, T135°C...T300°C  
IECEX CSA 11.0014  
Consult Factory for T3 or T4



**KOSHA**  
APPROVED INSTRUMENT  
For use in hazardous area locations; Class I Group B, C, D; Class II Group E, F, G; Class III; Encl Type 4x; Class I Zone I; AEx d IIB + H2 IP66  
Ex d IIB + H2 T2...T4 Gb IP66; Ex tD A21 IP66  
T135°C...T300°C  
Consult Factory for T3 or T4



**ATEX**  
APPROVED INSTRUMENT  
For use in hazardous area locations; Ta = 0°C to 50°C; IP66; Ex d IIB + H2 T4 Gb / Ex t IIIC T135°C Db or EX d IIB + H2 T3 Gb/ Ex t IIIC T2000°C Db or Ex d IIB + H2 T2 Gb/Ex t IIIC T3000°C Db; SIRA 12ATEX1302  
Consult Factory for T3 or T4



**CE**  
APPROVED INSTRUMENT



ORDER  
YOURS  
TODAY

# Series 9200MP

## Flow Averaging Tube (FAT<sup>TM</sup>)



WANT TO LEARN MORE...



Visit:  
[www.epiflow.com](http://www.epiflow.com)



Call us at:  
800.321.FLOW



To place an order, email:  
[sales@epiflow.com](mailto:sales@epiflow.com)