



高壓驗電礙子

Epoxy-mold Voltage Detector

24KV



額定 / 耐壓 / 衝擊 - 24 / 60 / 125 KV

拉伸 / 彎曲 / 扭力 - >2000KG / 600KG / >30 KG-M

局部放電 < 3PC


HC-210AVD
(C.D.=427mm)

Epoxy Mold

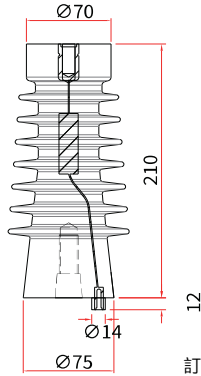


HC-210AVD-A3

訂貨編號： 801.E210N.A301

*非標準品·接單生產
* HC-210AVD-E3
JO4-125(IEC60273)

801.E210A.E301



HC-210AVD-A2

801.E210N.A210

25KV



額定 / 耐壓 / 衝擊 - 25 / 80 / 150 KV

拉伸 / 彎曲 / 扭力 - >2000KG / 600KG / >30 KG-M

局部放電 < 3PC


HC-230AVD
(C.D.=447mm)

Epoxy Mold

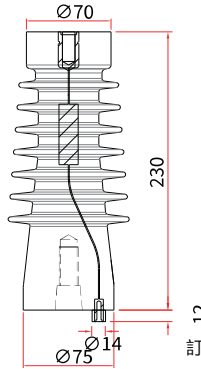

HC-230AVD-A3

訂貨編號： 801.E230N.A301

*非標準品·接單生產
* HC-230AVD-E3


801.E230A.E301

27KV


額定 / 耐壓 / 衝擊 - 24 / 60 / 125 KV

拉伸 / 彎曲 / 扭力 - >2000KG / 600KG / >30 KG-M

局部放電 < 3PC



Epoxy Mold

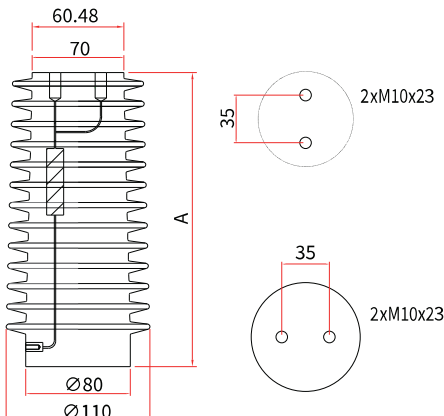

A	225	240	250
型號	HC-225EVD-A1	HC-240EVD-A1	HC-250EVD-A1
電器特性			
額定電壓	24 KV		25 KV
耐電壓	60 KV		60 KV
衝擊電壓	125 KV		150 KV
爬電距離	526 mm	541 mm	551 mm
局部放電	26.4 KV < 3PC		27.5 KV < 3PC
機械特性			
抗拉破壞	2000 KG		
彎曲破壞	600 KG		
扭轉破壞	30 KG-M		

訂貨編號： 801.E225E.A101

801.E240E.A101

801.E250E.A101