



額定 / 耐壓 / 衝擊 - 24 / 60 / 125 KV 拉伸 / 彎曲 / 扭力 - >2000KG / 600KG / >30 KG-M 局部放電 < 3PC



24KV

HC-210AVD (C. D. =427mm)

*非標準品，接單生產



Epoxy Mold

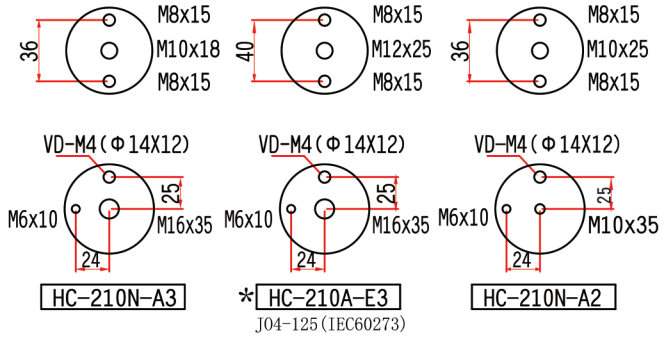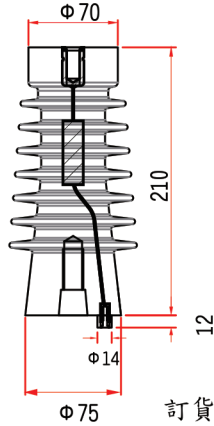

訂貨編號：801. E210N. A301 801. E210A. E301 801. E210N. A201

額定 / 耐壓 / 衝擊 - 25 / 80 / 150 KV 拉伸 / 彎曲 / 扭力 - >2000KG / 600KG / >30 KG-M 局部放電 < 3PC



25KV

HC-230AVD (C. D. =447mm)

*非標準品，接單生產



Epoxy Mold

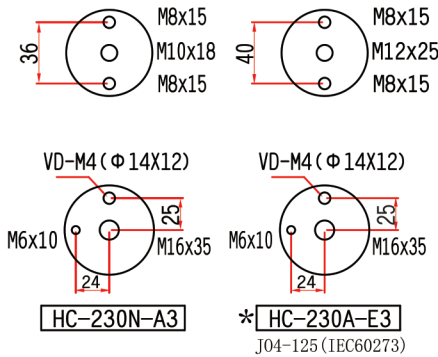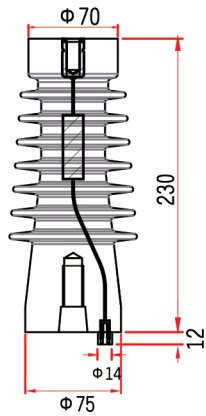

訂貨編號：801. E230N. A301 801. E230A. E301

拉伸 / 彎曲 / 扭力 - >2000KG / 600KG / >30 KG-M 局部放電 < 3PC


27KV

HC-240EVD

訂貨編號：801. E225E. A101/801. E240E. A101/801. E250E. A101



Epoxy Mold

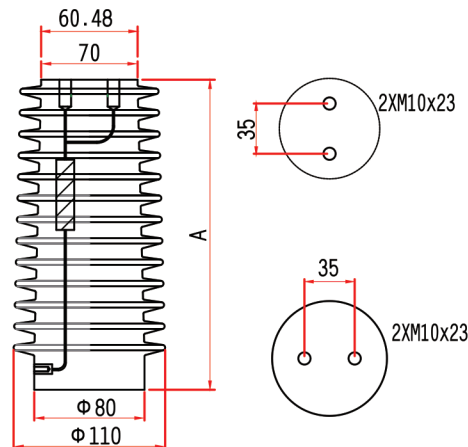

A	225	240	250
型號	HC-225EVD-A1	HC-240EVD-A1	HC-250EVD-A1
電器特性			
額定電壓	24 KV		25 KV
耐電壓	60 KV		80 KV
衝擊電壓	125 KV		150 KV
爬電距離	526 mm	541 mm	551 mm
局部放電	26.4 KV < 3PC		27.5 KV < 3PC
機械特性			
抗拉破壞	2000 KG		
彎曲破壞	600 KG		
扭轉破壞	30 KG-M		