



# 高壓驗電礙子

## Epoxy-mold Voltage Detector

24KV

額定 / 耐壓 / 衝擊 - 24 / 60 / 125 KV



拉伸 / 彎曲 / 扭力 - &gt;2000KG / 600KG / &gt;30 KG-M

局部放電 &lt; 3PC

HC-210AVD  
(C.D.=427mm)



Epoxy Mold

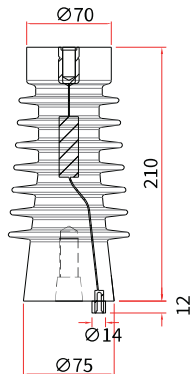

\* HC-210AVD-E3  
JO4-125(IEC60273)

訂貨編號： 801.E210A.E301

25KV

額定 / 耐壓 / 衝擊 - 25 / 80 / 150 KV



拉伸 / 彎曲 / 扭力 - &gt;2000KG / 600KG / &gt;30 KG-M

局部放電 &lt; 3PC

HC-230AVD  
(C.D.=447mm)



Epoxy Mold

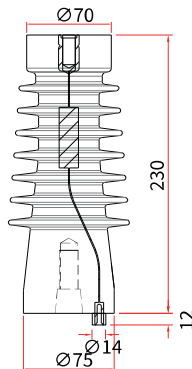

\* HC-230AVD-E3


訂貨編號： 801.E230A.E301

27KV



額定 / 耐壓 / 衝擊 - 27 / 80 / 150 KV

拉伸 / 彎曲 / 扭力 - &gt;2000KG / 600KG / &gt;30 KG-M

局部放電 &lt; 3PC



Epoxy Mold

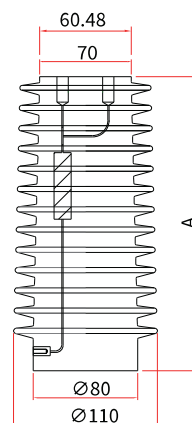

A	240
型號	HC-240EVD-A1
電器特性	
額定電壓	27 KV
耐電壓	80 KV
衝擊電壓	150 KV
爬電距離	541 mm
局部放電	26.4 KV < 3PC
機械特性	
抗拉破壞	2000 KG
彎曲破壞	600 KG
扭轉破壞	30 KG-M

訂貨編號： 801.E240E.A101