
55 Great Jones Street New York NY 10012 212 473 2501

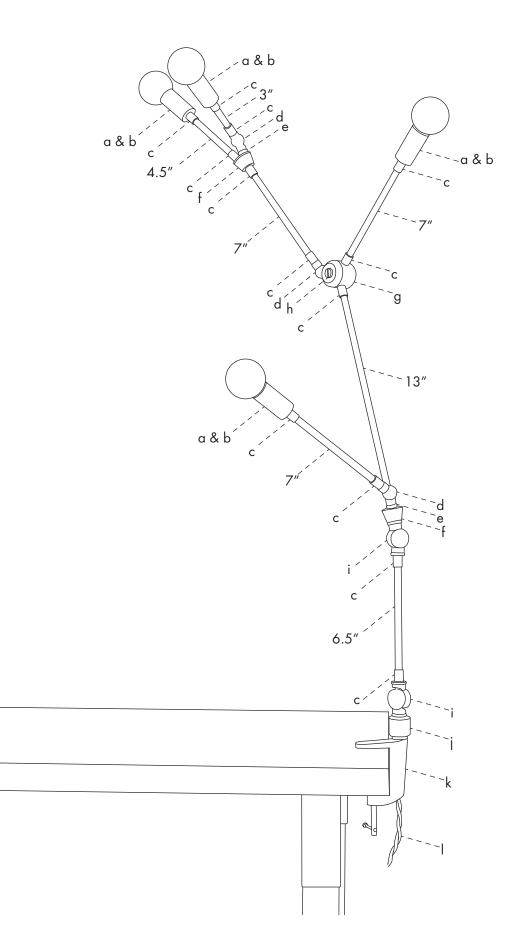

YOU MAKE IT – TABLE LIGHT PARTS LIST

LINDSEY ADELMAN STUDIO

55 Great Jones Street New York NY 10012 212 473 2501

From Grand Brass (www.grandbrass.com):

- a. 4 candelabra sockets. Item SO20025-IC.
- **b.** 4 candelabra socket cups. Item CU577BR.
- c. 13 couplings. Item NE449NP.
- **d.** 3 friction swivels. Item SV140.
- e. 2 bead nuts. Item NU430.
- **f.** 2 cluster bodies. Item BOT2.
- g. 1 large cluster body. Item BOLG3.
- h. 2 hole plugs. 1 each, Item FI1/8 PLUG and FI1/4PLUG.
- i. 2 large swivels with teeth. Item SV100.
- i. 1 cluster body with no side holes. Item BOS0X8.
- k. 1 table clamp. MICLAMP
- I. 8 feet cloth covered wire. Item WITWISTGREY.

arms:

- 1 3" arm. Item PIST03
- 1 4.5" arm. Item PIST04.5
- 1 6.5" arm. Item PIST06.5
- 3 7" arms. Item PIST07
- 1 13" arm. Item PIST13

(not shown, various other parts):

plug. Item PL183W
nipples, 1/2" long. Item NIO-1/2x1/8.
nipple, 1" long. Item NI-0x1/8.
blue wire nuts. Item WINUTB.
grey wire nuts. Item WINUTG.
Electrical tape. Item TAE60.

From McMaster-Carr (www.mcmaster.com):

25 feet white wire. Item 7587K954. 25 feet black wire. Item 7587K951. Heat shrink tubing. Item 7864K22.


From House of Antique Hardware (www.houseofantiquehardware.com):

4 Small round carbon filament candelabra base bulbs. Item R-010KC-CNDL-RND.

Tools needed:

Wire strippers Needlenosed pliers Flat head screwdriver Lighter or hairdryer for heat shrink tubing

LINDSEY ADELMAN STUDIO 55 Great Jones Street

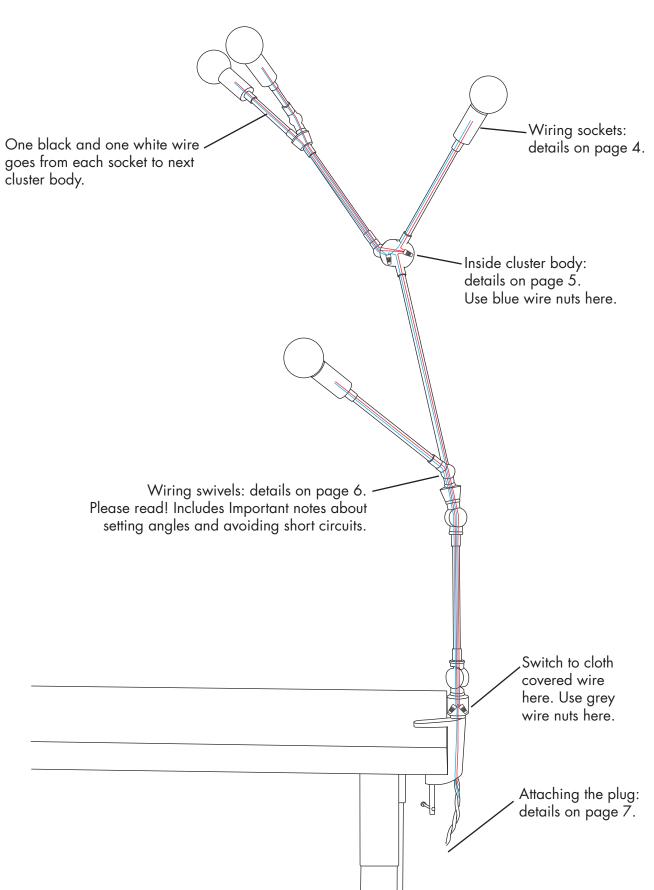


55 Great Jones Street New York NY 10012 212 473 2501




Strip wire and twist the ends.



Tighten screw.

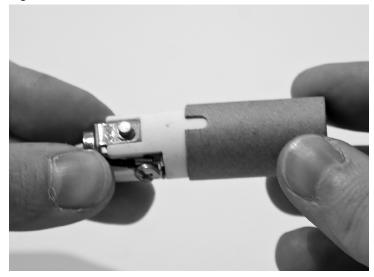



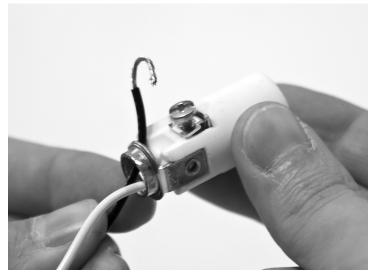


Hook black wire aroung GOLD screw.




Do the same for the white wire and SILVER screw.

- Slide cardboard sleeve back on.

55 Great Jones Street New York NY 10012 212 473 2501

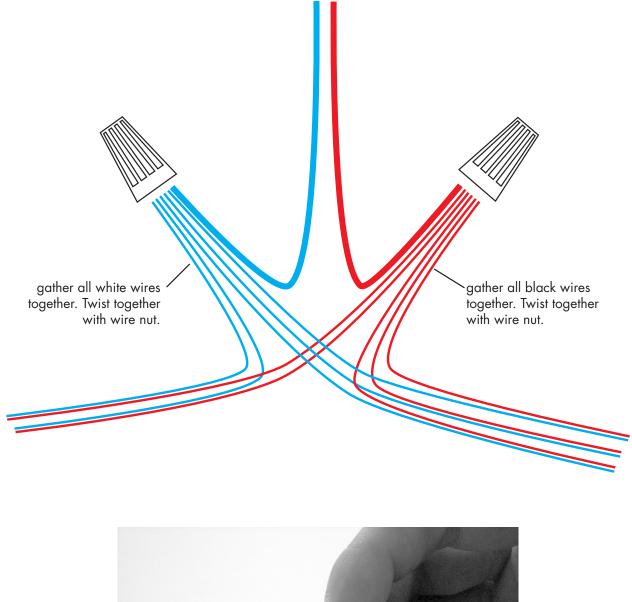

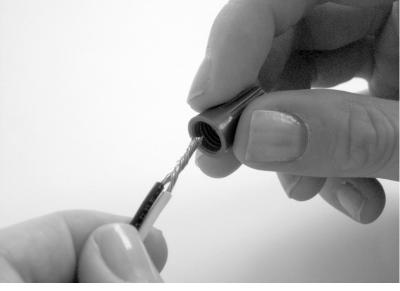



Slip heat shrink over wires. Shrink a little bit nearest the swivel, using a hair dryer or lighter. BE CAREFUL NOT TO BURN THE WIRES – move the lighter quickly and stop as soon as tubing has shrunk.



Slip the tubing down toward the swivel, so that the little shrunken bit goes inside the swivel.




Bend wires and push them into the cavity of the swivel. Place washer over wires. It is best to set your angle now and not change – too much swiveling back and forth can cut the wires and cause a short cicuit.



Place the second half of the swivel on and tighten with the screw, making sure not to trap any wires between the two halves.

55 Great Jones Street New York NY 10012 212 473 2501

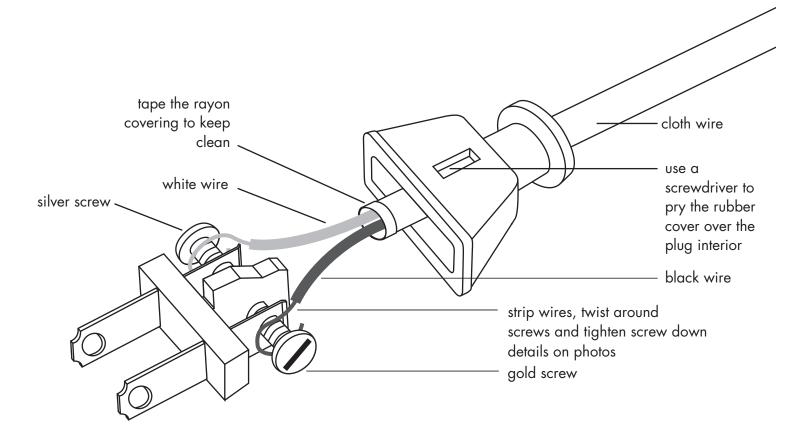

Lindsey Adelman Studio provides this information solely as a guide, and cannot be held liable for any consequences whatsoever. DIY can go wrong, and it therefore must be stressed that nothing should be attempted without applying common sense, and only if you are confident in your ability to carry out the job with safety (both your own and others') and successfully. Please remember that this guide has been given to you in good faith for free, and neither its accuracy nor legality can be relied upon.