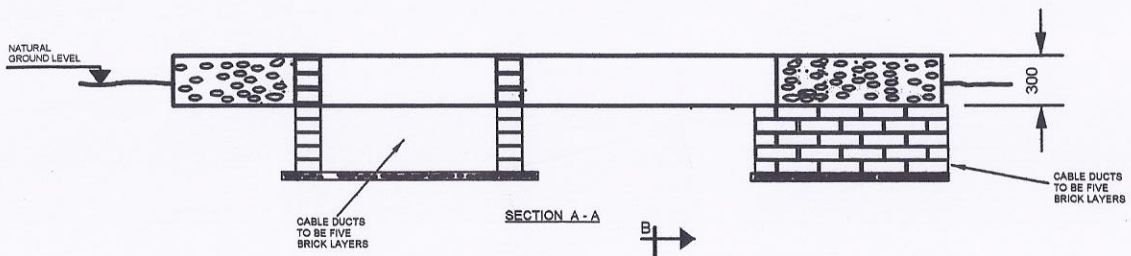

SECTION A - A

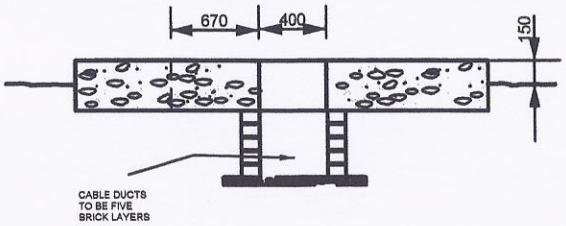

SECTION B - B

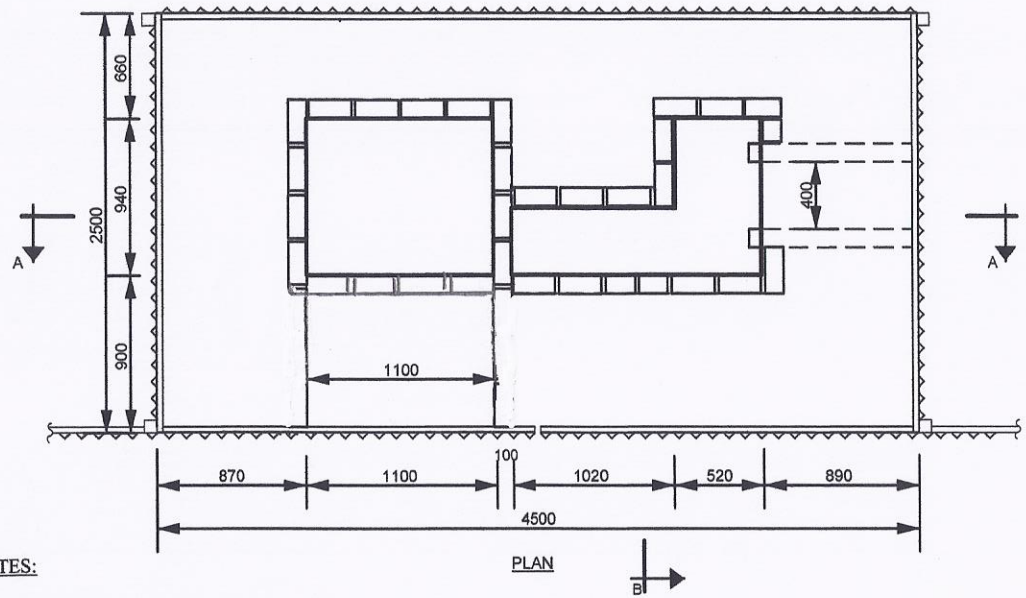

PLAN

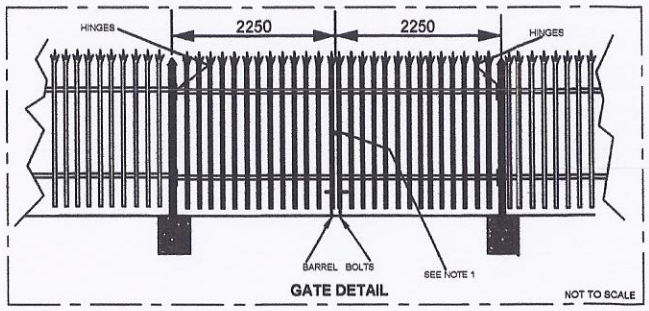

GATE DETAIL NOT TO SCALE

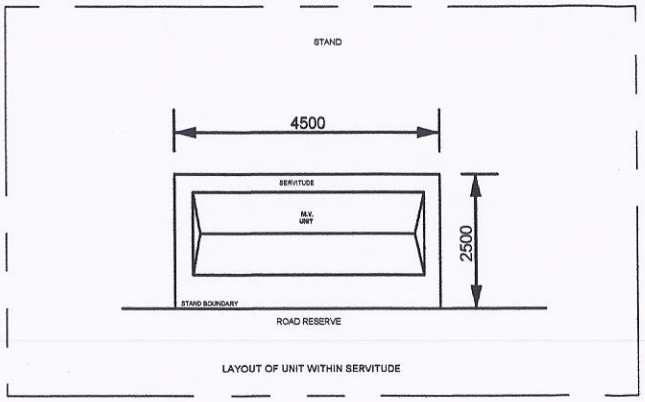

LAYOUT OF UNIT WITHIN SERVITUDE

NOTES:

1. Two, 2.25 metre palisade swing gates, 1,8 m high, provided with suitable locking arrangement (to suit Council padlock) and barrel bolts.
2. 75 x 75 mm Square tubing posts of 2 200 mm high to be planted 400 mm deep and secured in concrete.
3. Provide hinges on gates.
4. Concrete slab to be 150 mm above natural ground level.
5. Concrete strength - 25 Mpa at 28 days.
6. Palisade indicated, however, the servitude can be fenced off with a wall or fence of similar construction than the boundary wall or fence.

ALL DIMENSIONS ARE IN MILLIMETRES.

EKURHULENI METROPOLITAN MUNICIPALITY
GERMISTON CUSTOMER CARE CENTRE
ENERGY DEPARTMENT

AREA REQUIRED TO HOUSE M. V. METERING UNIT(SIDE)

DATE:	08 MARCH 2011	PROJECT No:	
DRAWN AND COMPILED BY:	HOPE MALAMBE	Z:\Tpool\ElecAdmin\Hmalambe\E-TR168.C.DRG	

APPROVED BY

ENGINEERING TECHNICIAN	SENIOR ENGINEER CONSTRUCTION AND PLANNING
T. SIBILOANE	M. J. SWANEPOEL

CHIEF AREA ENGINEER ENERGY

ACTING CHIEF AREA ENGINEER

DATE :

REVISIONS

No.	DESCRIPSION	BY	DATE
1	FIVE LINE OF BRICKS INSTEAD OF THREE	H.H.M.	8.03.11
2	INCRESING THE DUCT TO 1100 MM	H.H.M.	22.2.16
3			
4			
5			
6			

NOT TO SCALE

PLAN No. : 168/C