


Metallized BOPET Film

On acrylic treated side, high barrier, corona treated reverse.

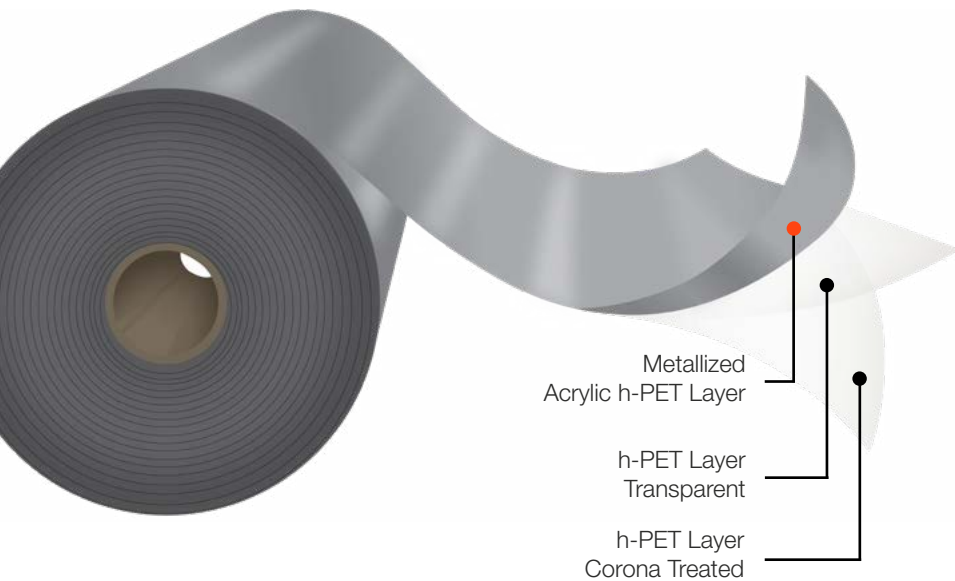

Opet MetalFilm a-MT+

EN a - MT



Description

Opet MetalFilm a-MT+ is metallized on one side by a controlled vacuum deposition process of high purity aluminum. The base raw material is PET homopolymer. The metal layer is located on the outside.

Main Characteristics

- Metallized outside, corona treated inside
- High barrier to light, oxygen and moisture
- Outstanding machinability
- Excellent flatness and dimensional stability
- Very high bonds to aluminium, adhesives and inks
- Moisture and temperature resistance

Applications

This product is typically used as the internal web in laminations for products which require excellent light protection and high moisture and / or oxygen barrier. The metal on the acrylic treatment side delivers good bond strengths in water and solvent based laminations. It is recommended to use adhesives with good elastic curing to avoid affecting lamination bonds. It meets FDA regulations for direct food contact. This film is moisture and temperature resistant in hot filling and sterilization applications.

* Important Considerations

It is recommended to store this material at conditions not exceeding 86°F, at shadow and with a relative humidity of 60%.

It is important to keep overwrap to protect rolls from humidity while they are not used in order to avoid blocking of this material.

There might be a deterioration of certain physical properties by adverse storage conditions through time. It is therefore advisable to keep an adequate inventory turn-over of this material.

Standard Dimensions*

*This product has lot size and width restrictions. Please consult your sales representative. Refer to ENa-TM as the metal inside variant

OpetFilm Code	Thickness (mils)	Yield (in ² /lb)	Width (in)	Core Size	22½" Ø Outside Diam.		30" Ø Outside Diam.		Treatment
					Length (ft)	Weight (lb/in)	Length (ft)	Weight (lb/in)	
EN a 10 MT	0.39	50,200	15 to 80	6"	66,600	16.18	126,900	30.73	Metal Out Corona In
EN a 12 MT	0.47	41,900			55,800		105,600		
EN a 23 MT	0.9	21,800			28,900		55,100		

Typical Values of Physical Properties *

*Information and data presented in this data sheet are intended to be used as general guidelines. Technical specifications are available upon request.

Property	Unit	Testing Method	Thickness in mils		
			0.39	0.47	0.91
Optical Density	%	Tobias	2.8		
Metal Adhesion	M	g/in	610		
Coefficient of Friction - Kinetic	T/T	-	ASTM D1894		
Tensile Strength	MD	lb/in ²	30,500		
	TD		31,900		
Elongation at Break	MD	%	125		
	TD		95		
Secant Modulus @ 2%	MD	lb/in ²	566,000		
	TD		609,000		
Shrinkage @ 300 °F, 30 min	MD	%	1.2		
	TD		1.0		
Surface Tension	NM	dyne/cm	OHG M004		
Water Vapor T. R. @ 100 °F, 90% R. H.		g/(100 in ² .day)	ASTM F1249		
Oxygen T. R. @ 73 °F, 0% R. H.		cm ³ /(100 in ² .d)	ASTM D3985		

Opet MetalFilm a-MT+

EN a - MT

