


Multilayer White Cavitated BOPP

OPP VoidFilm

VDE - TT

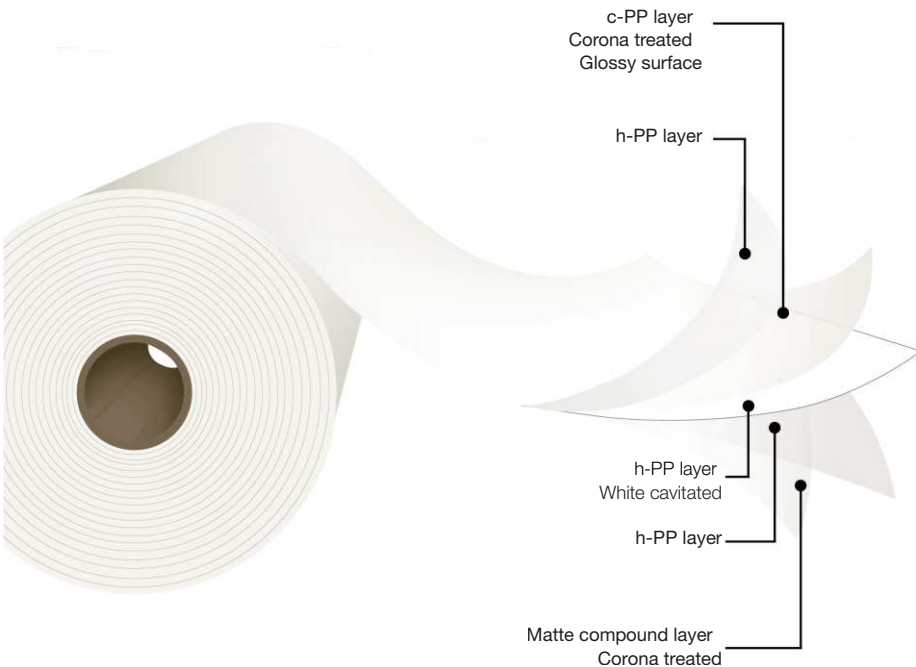

One side matte, high thermal resistance, both sides corona treated

Description

Five layer film with controlled cavitation and white pigmentation. It contains a combined migratory / non migratory slip and antistatic package for an excellent machinability. This film is corona treated in both sides.

Main Characteristics

- White film with controlled cavitation.
- Matte finish on one side and glossy finish on the other.
- Designed for lamination processes and/or label applications.
- Excellent flatness and dimension stability.

Applications

This product is designed to be employed in label market. Its paper-look appearance on the matte side allows substitution in a variety of applications where moisture resistance, high durability and/or ease of recyclability are required. The film density has been optimized to improve handling resistance. In order to have more applications of this film, it meets FDA regulations for direct food contact.

* Important Considerations

- It is recommended to store this material at conditions not exceeding 30°C, under shade and with a relative humidity of 60%. To protect against humidity and avoid film blocking, rolls should stay covered with the plastic overwrap when not in use.
- The information in this data sheet is based on tests carried out in our laboratories and it is intended to be used for reference only, and does not constitute a specification; therefore, should not be construed as a guarantee of performance. It is the responsibility of the user to carry out the necessary tests to guarantee its use for the intended applications.
- This product complies with FDA and EU regulations. For more detailed information about our technical and regulatory documents, please visit our website: <https://www.obengroup.com/en/documents>

Standard Dimensions *

Film Code	Thickness (mils)	Yield (in ² /lb)	Width (in)	Core Size	22 1/2" Φ Outside Diam.		30" Φ Outside Diam.		Treatment
					Length (ft)	Weight (lb/in)	Length (ft)	Weight (lb/in)	
VDE 60 TT	2.36	16,800	15 to 80	3" & 6"	12,500	8.9	23,000	16.4	Both

*This product has lot size and width restrictions. Please consult your sales representative.

Typical Values of Physical Properties **

Property	Unit	Testing Method	Thickness in Mils	
			2.36	
Light Transmission	-	ASTM D1003	15	
Gloss 45°	TI	ASTM D2457	10	
	TE		90	
Coefficient of Friction - Kinetic	-	ASTM D1894	0.4	
Tensile Strength	DM	ASTM D882	11,700	
	DT		26,200	
Elongation at Break	DM		160	
	DT		40	
Secant Modulus 2%	DM		246,600	
	DT		435,200	
Surface Tension	-	ASTM D2578	40	

**Information and data presented in this data sheet is intended to be used as general guidelines. Physical properties specifications are available upon request.

OPP VoidFilm

VDE - TT