

REVISION HISTORY (FOR DELTEC USE ONLY)	
1	ALT WINDOWS @ PANELS D & O FROM 7/0X5/2 TO 6/0X5/2. ADDED 6/0X5/2 WINDOWS @ PANEL H. ADDED 6/0X5/2 @ PANEL L. ALT WINDOW @ PANEL E FROM 7/0X5/2 TO 6/0X4/2. REMOVE F.P. @ PANEL B. ALT STAIRS TO ACCOMMODATE WIDTH OF 4". ADDED 9' GARAGE DOORS AND PANEL 1/0 FOR WING. ALL AS PER CUSTOMERS MARKED PRINT. 6-13-00
2	SHORTENED GARAGE TO 24'. PANELS AND INDICATORS ALTERED TO SUIT. MOVED DOOR FR GARAGE TO STAIR LANDING. CHANGED WINDOWS FR DH TO SLIDERS. MOVED TOILET AND SHOWER IN BATH# 3. MOVED LINEN CLOSET. ADDED CLOSET TO BEDROOM #3 W/ 3/0 POCKET DOOR. MOVED ISLAND IN KITCHEN. REMOVED WALL IN CLOSET @ KITCHEN. ALL AS PER CUSTOMERS MARKED PRINT. 4/4/00
3	ADDED STEMWALL TO ACCOMMODATE CRAWLSPACE & SLAB CHANGE IN BSMT. ADDED NOTE #6 & SECTION 2-C TO SUIT. ALT STRING OF DOORS @ PANEL #1. ALT DOORS @ PANELS M & A FROM PGD TO FRENCH DBL DOORS. ALT ISLAND IN KITCHEN TO 5' X 4'. ALL AS PER CUSTOMERS SIGNED PRINT/PANELS 0/6/0/0. DELETED TEMPERED DES. PANEL E. ALT HT FROM 5/6 TO 5/2. AS A PLAN CORRECTION. 6-13-00
4	INCORPORATED PRODUCTION SPECIFICATIONS. 7-28-00



- GENERAL NOTES:**
- WINDOWS ARE TO BE MANUFACTURED BY ELLISON.
 - ALL EXTERIOR SWINGING DOORS TO BE SUPPLIED AND INSTALLED ON SITE BY OTHERS. DELTEC TO SUPPLY ROUGH OPENINGS ONLY.
 - MUST BE LOAD BEARING WALL TO SUPPORT MODIFIED FLOOR TRUSSES FOR STAIRWAY OPENING.
 - STAIR LINO:
(15) RISERS @ 7-7/16"
(14) TREADS @ 9-1/2" (EXCLUDING NOSING)
 - PANEL "D" TO SIT ON 16-5/8" KNEEWALL. KNEEWALL "D1" TO BE 7"-9" WIDE.
 - PORTION OF WING WALLS TO SIT ON MASONRY STEMWALL. STEMWALL REQUIRED TO MAINTAIN CORRECT ALIGNMENT OF WALL PANELS.

PRODUCTION SPECIFICATIONS (1200 UNIT)	
WALL PANEL HEIGHT	7'-11"
WALL PANEL THICKNESS	2X6
SILL PLATE MATERIAL	S.P.F.
FOAM (YES/NO)	YES
5/8" CDX (YES/NO)	YES
SIDING	PINE LAP
SKIRT LENGTH	19 INCHES
ORDER OF COVERING	STUD-CDX-FOAM-SIDING
HIGH WIND REQUIREMENTS (YES/NO)	NO
NOTES:	


WALL PANEL SCHEDULE (FOR DELTEC USE ONLY)				
PANEL	R.O. OR SOLID	LOC. (L,R,C OR DIS.)	MOUNTING HEIGHT (TOP OF WALL TO SILL)	WINDOW/DOOR SPECIFICATION
A	R.O. 74" X 83"	C	83"	
B	SOLID			
C	SOLID			
D	R.O. 71" X 61-7/8"	C	83"	ELLISON VINYL TWIN DBL HUNG ((2) 3/0X5/2)
D2	16-5/8" KNEEWALL X 7'-9" WIDE			
E	R.O. 71" X 61-7/8"	C	83"	ELLISON VINYL TWIN DBL HUNG ((2) 3/0X5/2)
F	SOLID			
G	R.O. 50-1/2" X 83"	12" R	83"	
H	R.O. 38-1/2" X 83"	17" L	83"	
I	R.O. 38-1/2" X 83"	24" R	83"	
J	SOLID			
K	SOLID			
L	R.O. 71" X 37-7/8"	C	83"	ELLISON VINYL TWIN DBL HUNG ((2) 3/0X5/2)
M	R.O. 74" X 83"	C	83"	
N	R.O. 71" X 61-7/8"	C	83"	ELLISON VINYL TWIN DBL HUNG ((2) 3/0X5/2)
O	R.O. 71" X 61-7/8"	C	83"	ELLISON VINYL TWIN DBL HUNG ((2) 3/0X5/2)

PRODUCTION SPECIFICATIONS (24' X 24' WING)	
WALL PANEL HEIGHT	7'-11"
WALL PANEL THICKNESS	2X6
SILL PLATE MATERIAL	S.P.F.
FOAM (YES/NO)	YES (SHIPPED LOOSE)
5/8" CDX (YES/NO)	YES
SIDING	PINE LAP (SHIPPED LOOSE)
SKIRT LENGTH	19 INCHES
ORDER OF COVERING	STUD-CDX
HIGH WIND REQUIREMENTS (YES/NO)	NO
NOTES:	


WALL PANEL SCHEDULE (FOR DELTEC USE ONLY)				
PANEL	R.O. OR SOLID	LOC. (L,R,C OR DIS.)	MOUNTING HEIGHT (TOP OF WALL TO SILL)	WINDOW/DOOR SPECIFICATION
A1	6" SOLID			
B1	SOLID			
C1	4" SOLID			
D1	7'-6 1/2" SOLID (SEE NOTE #1)			
E1	SOLID (SEE NOTE #2)			
F1	SOLID (SEE NOTE #3)			
H1	10-1/2" SOLID (SEE NOTE #4)			
I1	SOLID			
J1	6"-8" PANEL R.O. 38-1/2" X 83"	12" L	83"	

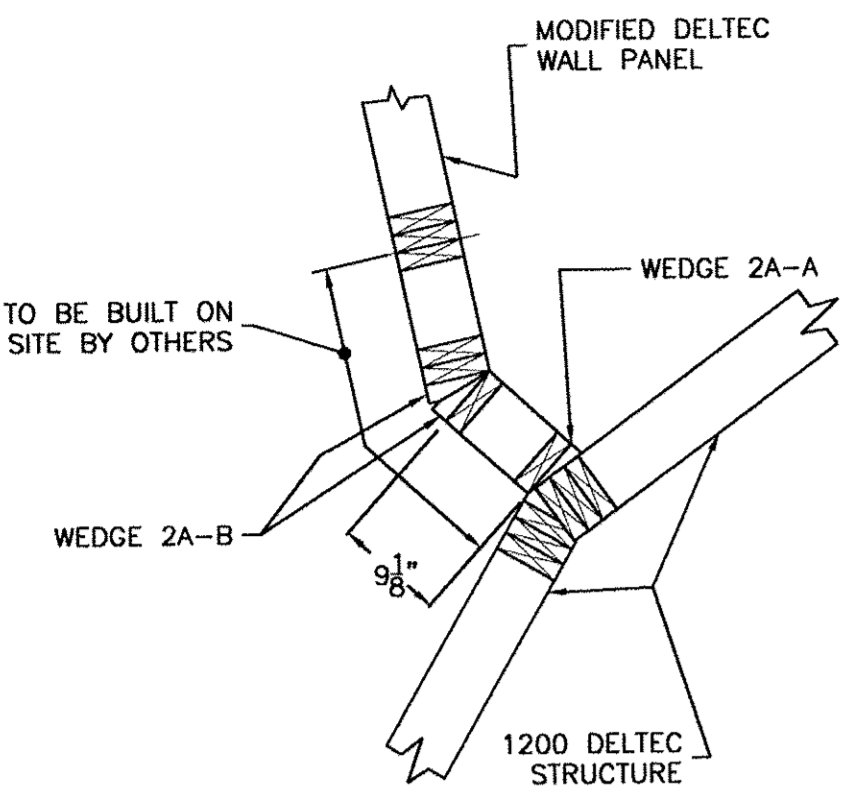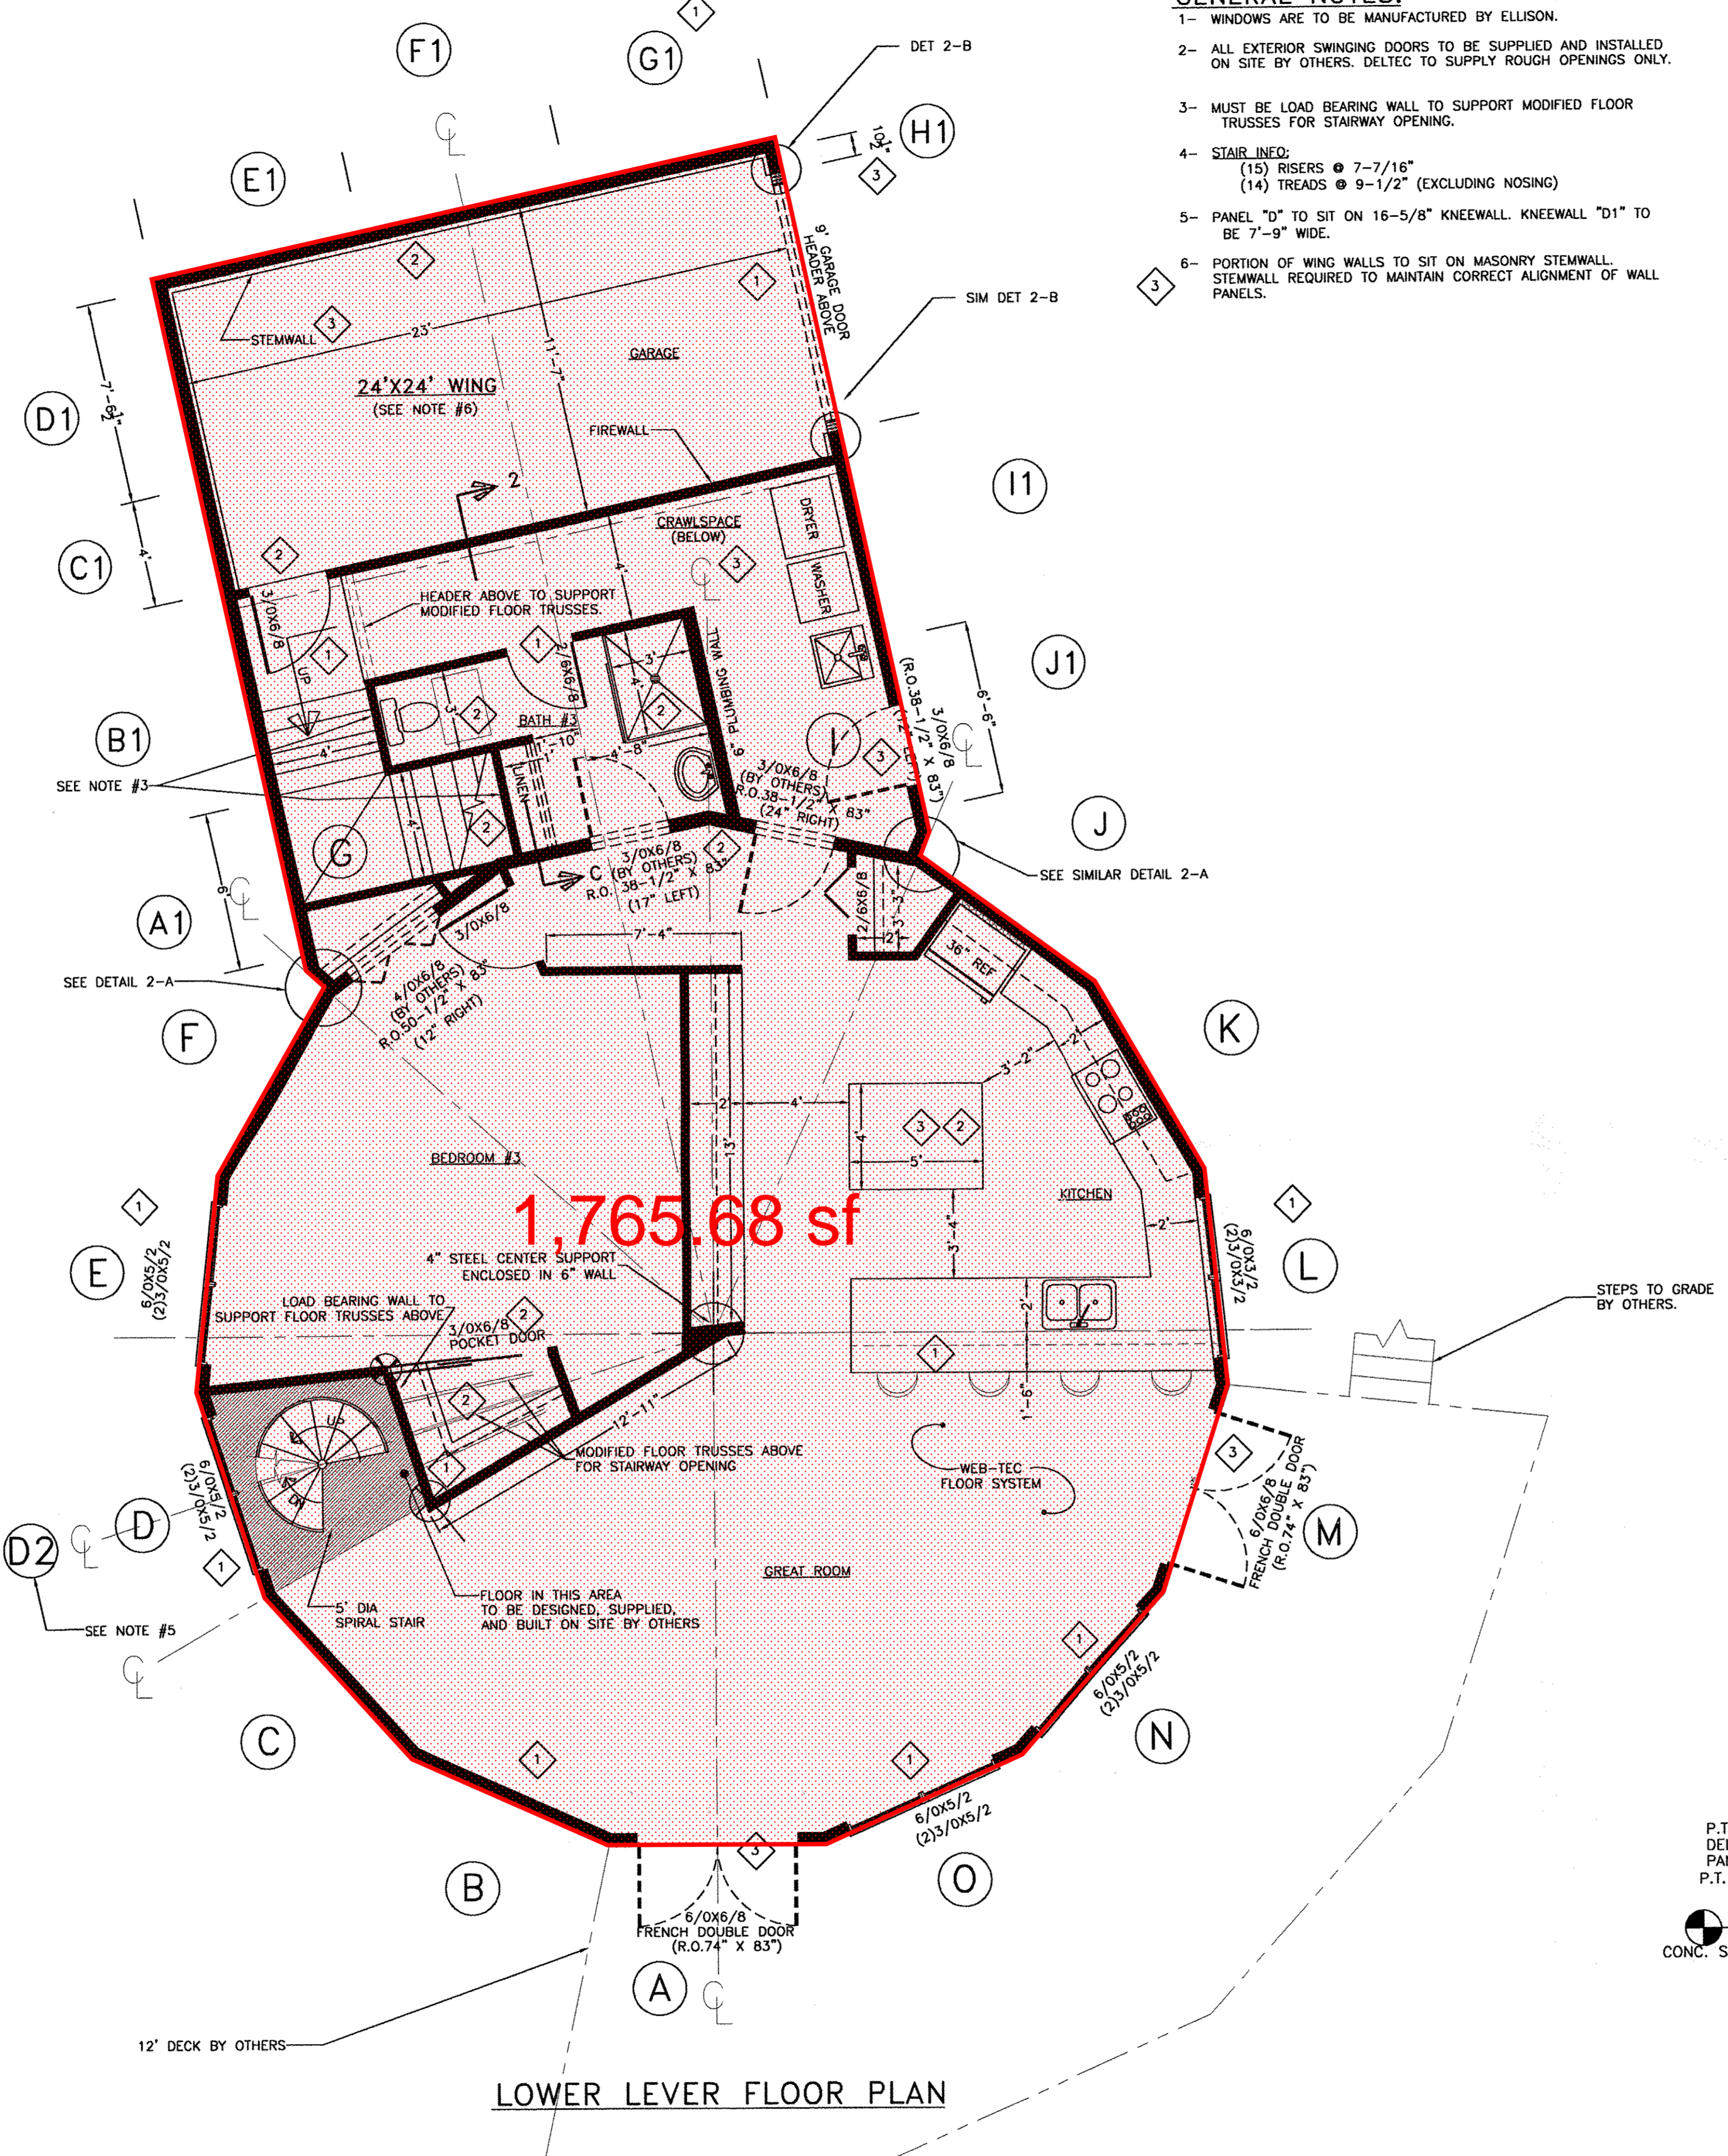


DETAIL 2-A
SCALE: 3/4"=1'-0"

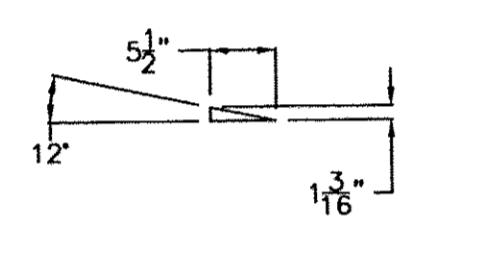


WEDGE 2A-A
(1) REQUIRED PER CONNECTION

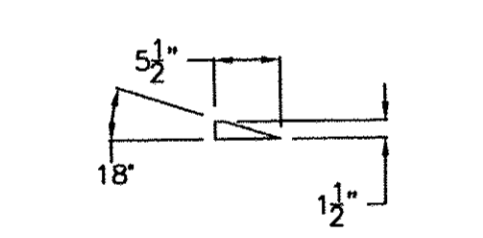

WEDGE 2A-B
(2) REQUIRED PER CONNECTION

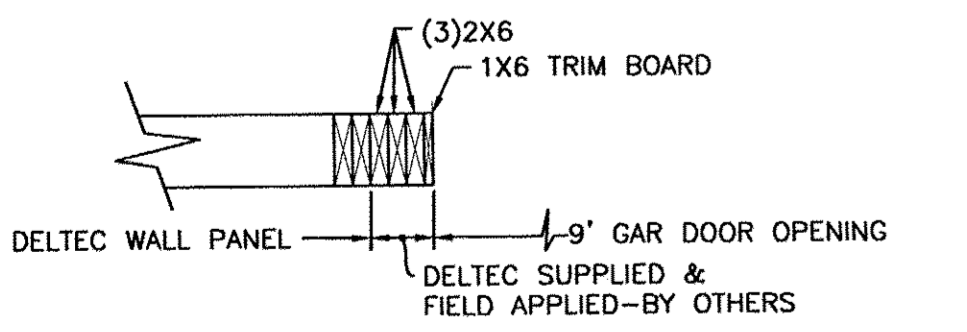

DETAIL 2-B
SCALE: 3/4"=1'-0"

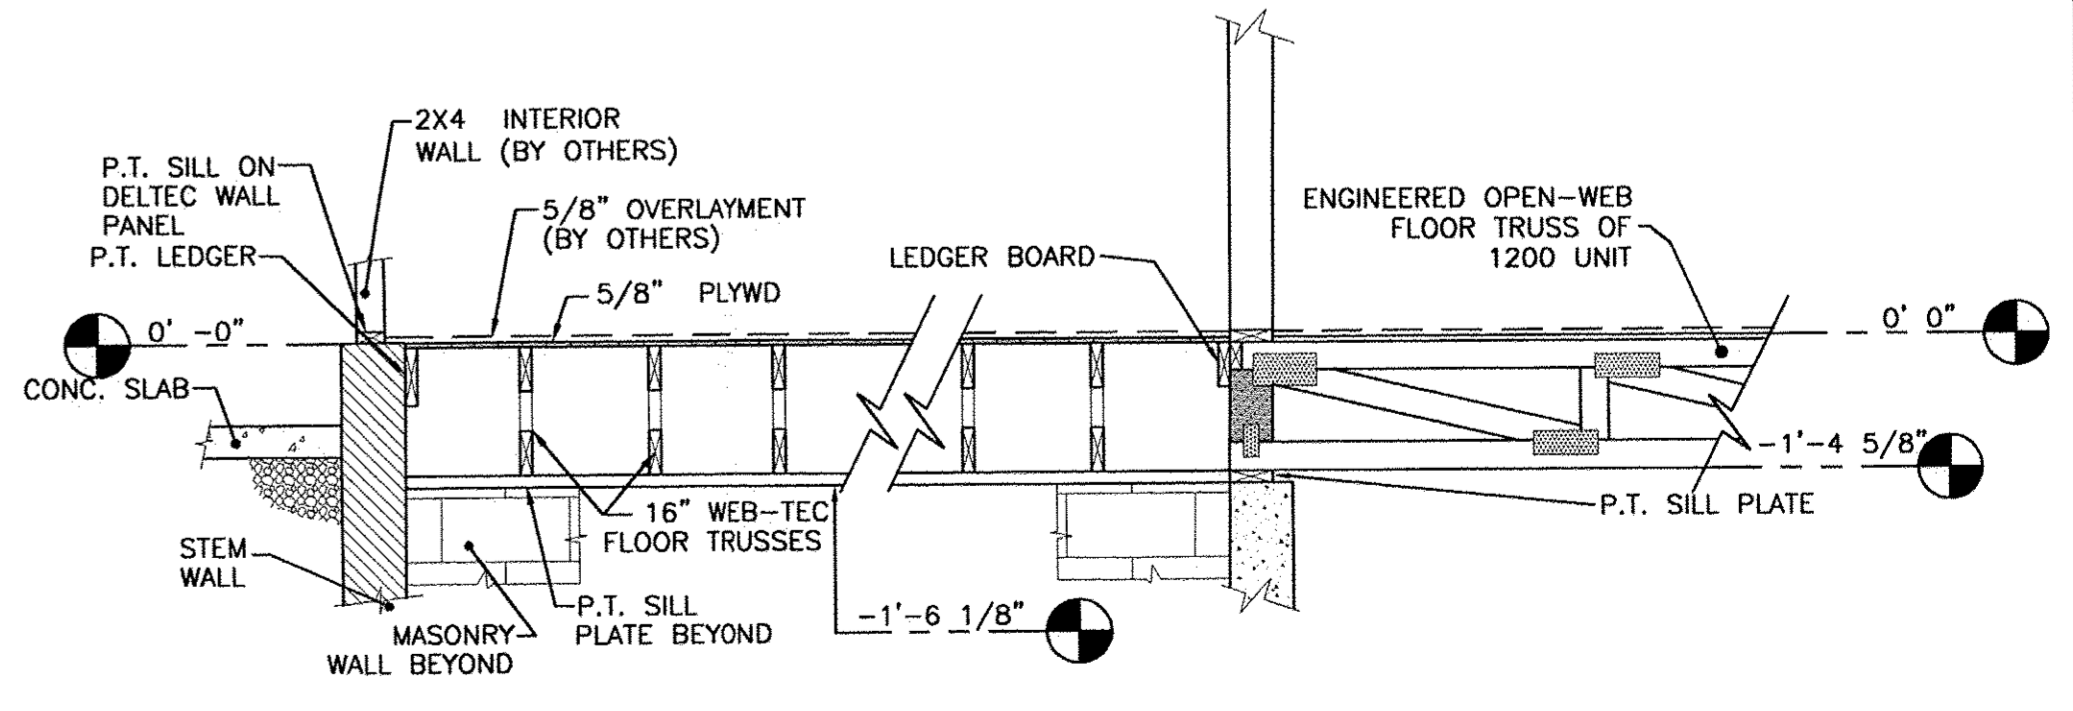

SECTION 2-C
SCALE: 1/2"=1'-0"

CHECKED BY:		DATE: 3/8/00
PANEL HEIGHT: 8'	SCALE: 1/4"=1'-0"	DWN:
PANEL THICKNESS: 2X6	1200/0012-562	
JOB #: 00008	VELVET MOTSINGER	2 OF 3
QUOTE #:	2-ST 1200 WING ON BSMT/LOWER LEVEL PLAN	0012-562