IES MASTER
Institute for Engineers (IES/GATE/PSUs)

ESE-2016

Detailed Exam Solutions
(Objective Paper-I)
Civil Engineering

In case there is any kind of discrepancy in solutions please write to us at ***ies_master@yahoo.co.in*** or call us at : **Ph: 011-41013406, 09711853908** for rectification/deletion/updation of the same.

OFFICE
F-126, Katwaria Sarai, N.D-16. Ph : 011-41013406, 9711853908, 8130909220
Email : ies_master@yahoo.co.in,http://www.iesmaster.org

SCROLL DOWN

IES MASTER
Institute for Engineers (IES/GATE/PSUs)

Explanation of Civil Engg. Objective Paper-I (ESE - 2016)

SET - A

1. Consider the following statements :

1. There will be no defects in select grade timbers.
2. The codal values for strength of grade-II timer without defects may be reduced by 37.5%.
3. For timber used as columns, the permissible stress in ungraded timbers is adopted with a multiplying factor of 0.50.
4. In case of wind force and earthquakes, a modification factor of 1.33 is adopted.

Which of the above statements are correct ?

(a) 1 and 3 only (b) 1 and 4 only
(c) 2 and 4 only (d) 2 and 3 only

Ans. (c)

Sol. Some defects are permitted in all grades of timber and all other defects unlikely to affect any of the mechanical strength properties.

- As IS: 1331 –1971 provides for reduction in strength of Grade-II timber without defects not by more than 37.5%.
- Permissible stress in ungraded timbers is adopted with a multiplying factor of 0.80.
- Modification factor of 1.33 is adopted in case of wind and earthquake forces

2. Consider the following statements regarding timber :

1. The strength of timber increases by Kiln seasoning.
2. Cutting of wood is to be done prior to treatment.
3. Water seasoning is good for prevention of warping.
4. ASCU treatment enhances the strength of wood.

Which of the above statements are correct ?

(a) 1, 2 and 3 only (b) 2, 3 and 4 only
(c) 1, 3 and 4 only (d) 1, 2, 3 and 4

Ans. (a)

Sol. Seasoning of timber causes increases in strength, durability, workability and resilience.

Timber for treatment must be sound and dried to an appropriate moisture content. All wood working processes like cutting to size, boring, etc. shall be done prior to treatment.

Seasoning reduces shrinkage and warping

ASCU treatment is a method of preservation of timber, which results in durability of wood and not strength.

3. Gase(s) emitted during rotting or decomposition of timber is /are mainly

(a) Methane and Hydrogen
(b) Hydrogen Sulphide
(c) Carbonic acid and Hydrogen
(d) Ammonia

Ans. (c)

Sol. Rot in timber is decomposition or putrefaction generally caused by damp atmosphere which causes emission of gasses mainly carbonic acid & hydrogen.

4. Efflorescence of bricks is due to

(a) Excessive burning of bricks
(b) High silt content in brick clay

(c) High porosity of bricks
(d) Soluble salts present in parent clay

Ans. (d)

Sol. Effloresence is caused because of alkalies present in clay. Salts such as sulphates of soidum and potassium, if present in clay are dissolved by the absorbed water. On drying grey or white powder patches appear on the brick surface, which is called as efforescence.

5. Disintegration of bricks masonry walls is primarily due to

1. Efflorescence
2. Magnesium sulphate in bricks
3. Calcined clay admixtures
4. Kankar nodules

Which of the a above statements are correct ?

(a) 1, 2 and 3 only (b) 1, 2 and 4 only
(c) 3 and 4 only (d) 1, 2, 3 and 4

Ans. (d)

6. Consider the following test :

1. Transverse strength test
2. Water absorption test
3. Impact test
4. Breaking strength test

Which of the above are relevant to testing of tiles ?

(a) 1, 2 and 3 only
(b) 1, 2 and 4 only
(c) 3 and 4 only
(d) 1, 2, 3 and 4

Ans. (d)

Sol. As per IS 13630 : 2006, all the four tests are performed.

7. Which of the following statements is/are correct regarding the strength of cement ?

1. Particle sizes less than 3μm increases the viscous nature of the cement.
2. Finer particles in cement can be replaced by fly-ash to improve the strength.

(a) 1 only (b) 2 only
(c) Both 1 and 2 (d) Neither 1 nor 2

Ans. (c)

Sol.
- As particle size decreases viscous nature of cement decreases.
- Fly ash reacts with available lime and alkali in concrete, producing additional cementitious compounds as calcium silicate hydrate (C–S–H) binder.

  This additional binder produced by fly ash reaction with available binder allows fly ash concrete to gain strength over time. This will ultimately exceed the strength of fly ash concrete than of cement concrete mixes.

8. The constituent compound in Portland cement which reacts immediately with water, and also sets earliest, is

(a) Tricalcium silicate
(b) Dicalcium silicate
(c) Tricalcium aluminate
(d) Tetracalcium aluminoferrite

Ans. (a)

Sol. Rate of hydration is

$C_3A > C_4AF > C_3S > C_2S$

C_4AF and C_3A are responsible for flash set. When water is added to the cement, the quickest to react with water is C_3A.

9. Which of the following statements are correct with regard to cement mortar ?

1. Workability of cement mortar can be improved by addition of lime.
2. Fly-ash cement is economical in plastering jobs.
3. Addition of saw dust improves workability.
4. Sand in mortar can be replaced by finely crushed fire bricks.

(a) 1, 2, 3 and 4
(b) 1, 2 and 3 only
(c) 3 and 4 only
(d) 1, 2 and 4 only

Ans. (d)

Sol. Addition of saw dust decreases the workability because of water absorption.

10. In a concrete mix of proportion 1 : 3 : 6, the actual quantity of sand, which is judged to have undergone 15% bulking, per unit volume of cement, will be

(a) 3.00 (b) 3.45
(c) 4.50 (d) 6.00

Ans.(b)

Sol. Mix proportion = 1 : 3 : 6

Let the volume of cement = 1 m^3
(unit volume of cement)

Volume of sand = 3 m^3

Volume of aggregate = 6 m^3

Actual volume of sand = $3\left(1+\frac{15}{100}\right)=3.45m^3$

11. The Rheological behavior of concrete, when represented by shear stress vs rate of shear, is characterized as

(a) $\tau=\tau_0+\mu.\dot{\gamma}$ (b) $\dot{\tau}_0=\tau+\mu.\dot{\gamma}$
(c) $\frac{\tau}{\tau_0}=\mu.\dot{\gamma}$ (d) $\tau=\mu.\dot{\gamma}$

where : τ = shear stress,
τ_0 = (initial) yield value,
μ = at-point plastic viscosity
$\dot{\gamma}$ =at-point rate of shear

Ans. (a)

Sol. Concrete is most often assumed to behave as a bingham fluid.

Hence, $\tau=\tau_0+\mu\dot{\gamma}$

12. Which method of curing of concrete is recommendable for rapid gain of strength of concrete ?

(a) Sprinkling water
(b) Membrane curing
(c) High-pressure steam curing
(d) Infrared radiation curing

Ans. (c)

Sol. High pressure steam curing is generally recommended for rapid gain of strength of concrete.

13. Which of the following is appropriate as simple field method for assesing consistency of concrete ?

(a) Compacting factor (b) Slump test
(c) Vee-Bee test (d) Kelly Ball test

Ans. (d)

Sol. Kelly ball test is field method for assessing consistency of concrete while compaction factor test, slump test and vee-Bee test is used to measure workability of concrete.

14. Which of the following are relatable to Autoclaved Aerated Concrete ?

1. Light weight
2. Strong

3 Inorganic
4. Nontoxic

(a) 1, 2 and 3 only (b) 1, 2 and 4 only
(c) 3 and 4 only (d) 1, 2, 3 and 4

Ans. (d)

Sol. Properties of autoclaved aerated concrete are as follows :

(i) Thermal efficiency

(ii) Superior fire resistance

(iii) Light weight

(iv) Great ventilation

(v) Non toxic

(vi) Strong

(vii) Inorganic

15. The workability of concrete becomes more reliable depending on

1. Aggregate-cement ratio
2. Time of transit
3. Grading of the aggregate

(a) 1 only (b) 2 only
(c) 3 only (d) 1, 2 and 3

Ans. (d)

Sol. Workability of concrete depends upon all the three components.

16. The longitudinal strain of cylindrical bar of 25 mm diameter and 1.5 m length is found to be 3 times its lateral strain in a tensile test. What is the value of Bulk Modulus by assuming E = 1×10^5 N/mm^2 ?

(a) 2×10^5 N/mm^2 (b) 1.1×10^5 N/mm^2
(c) 1×10^5 N/mm^2 (d) 2.1×10^5 N/mm^2

Sol. (c)

Ans.

|longitudinal strain| = 3 × |lateral strain|

$$\text{Possions ratio } \mu = \left|\frac{\text{lateral strain}}{\text{longitudinal strain}}\right|$$

$$\mu = \frac{1}{3}$$

$$\text{Bulk modulus } K = \frac{E}{3(1-2\mu)}$$

$$K = \frac{E}{3\left(1-2\times\frac{1}{3}\right)}$$

$$K = E = 1 \times 10^5 \text{ N/mm}^2)$$

17. For an elastic material, Poisson's ratio is μ, Modulus of Elasticity is E, Modulus of Rigidity is C and Bulk Modulus is K. μ is expressible in terms of K and C as

(a) $\frac{6K-2C}{3K-2C}$ (b) $\frac{6K+2C}{3K-2C}$

(c) $\frac{6K-2C}{6K+2C}$ (d) $\frac{3K+2C}{6K+2C}$

Ans. (c)

Sol. Poisson ratio, $\mu = \frac{3K-2G}{6K+2G}$

18. A mild steel bar of length 450 mm tapers uniformly. The diameters at the ends are 36 mm and 18 mm, respectively. An axial load of 12kN is applied on the bar. E = 2×10^5 N/mm^2. The elongation of the bar will be

(a) $\frac{1}{3\pi}$mm (b) $\frac{1}{6\pi}$mm

(c) $\frac{3\pi}{2}$mm (d) $\frac{2}{3\pi}$mm

IES MASTER
Institute for Engineers (IES/GATE/PSUs)

ANNOUNCES EXCLUSIVE BATCHES FOR ESE 2017

[G.S. & ENGINEERING APTITUDE]
[ADDITIONAL TECHNICAL SUBJECTS]

PROGRAM FEATURES

1. Comprehensive study booklets containing objective question will be provided.
2. Classes by expert faculties in respective areas.
3. 2-days demo class will be provided to students.
4. Students enrolled in this course will be eligible for test series batch for preliminary exam of ESE.

TOPICS COVERED

1. Current issues of national and international importance relating to social, economic and industrial development.
2. Engineering aptitude covering logical reasoning and analytical ability.
3. Engineering Mathematics and Numerical Analysis.
4. General Principles of Design, drawing, Importance of Safety.
5. Standard and Quality practices in production, construction, maintenance and services.
6. Basics of Energy and Environment: Conservation, environmental pollution and degradation, climate change, environmental impact assessment.
7. Basics of project management.
8. Basics of material science and engineering.
9. Information and communication technologies (ICT) based tools and their applications in engineering such as networking, e-governance and technology based education.
10. Ethics and values in engineering profession.

SCROLL DOWN

Additional technical subjects as per ESE-2017 syllabus

Branch	Subjects
Civil	Dynamic analysis & earthquake resistant design Tender process, rate analysis, etc. Engineering Geology
Mechanical	Renewable source of energy, Mechatronics & Robotics
Electrical	Signal & System, Computer fundamental
Electronics	Advance Electronics Basics of Electrical Engineering Advance communication

G.S. & Engineering aptitude Program Fee & Course Duration

	Fee (in ₹)	Regular Batch Duration	Weekend Batch Duration	Short Duration Batch
Previous Year IES Master Students : [Postal Program, OTS, Ex-IES Master, CQPP, Interview]	12500	2-3 Months Starting on : 21st June,16	3 Months Starting on : 16th July,16	1-1½ Months Starting on : 28th July,16
Non-ES Master Students	16500	3-6 Hours Daily	8 Hours Daily	6 Hours Daily

Additional Technical Subjects Program Fee

	Fee (in ₹)
Previous Year IES Master Students : [Postal Program, OTS, Ex-IES Master, CQPP, Interview]	3500/- Per Subject
Non IES Master Students	5500/- Per Subject

HOW TO APPLY

Students can register by making payments in person with Cash/DD at our office located at **F-126, Katwaria Sarai, New Delhi-110016**, from 9:00 am to 8:30 pm

OUR OFFICE IS OPEN SEVEN DAYS A WEEK.


Students can pay Online also



SCROLL DOWN

Ans. (b)

Sol.

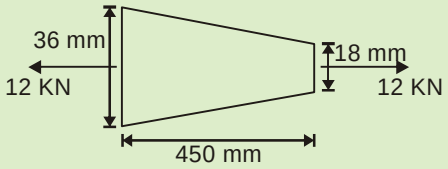

$$\text{Elongation of bar} = \frac{4PL}{\pi d_1 d_2 E}$$

$$= \frac{4\times12\times10^3\times450}{\pi\times36\times18\times2\times10^5}$$

$$= \frac{1}{6\pi}\text{mm}$$

19. Which of the following statements are correct for stresses acting on mutually perpendicular faces of a plane element ?

1. The sum of the normal stresses in mutually perpendicular planes is equal to the sum of the principal stresses.
2. The shearing stresses in two mutually perpendicular planes are equal in magnitude and direction.
3. Maximum shear stress is half of the difference between principal stresses.

(a) 1, 2 and 3 only (b) 1 and 2 only
(c) 2 and 3 only (d) 1 and 3 only

Ans. (d)

Sol. Shearing stresses in two mutually perpendicular planes are equal in magnitude but not same in direction.

Statement-I and III are true.

20. Which of the following statements are correct?

1. Strain in the direction of applied stress is known as longitudinal strain.
2. Tensile stress results in tensile strain in linear and lateral directions.
3. Strains in all directions perpendicular to the applied stress are known as lateral strain.
4. Ratio of change in volume to original volume is known as volumetric strain.


(a) 1, 2 and 3 only
(b) 1, 3 and 4 only
(c) 3 and 4 only
(d) 1, 2, 3 and 4

Ans. (b)

Sol. Tensile stress results in tensile strain in longitudinal and compressive strain in lateral directions.

Statement I, III and IV are true.


21. The state of stress on an element is as shown in the figure. If $E = 2\times10^5$ N/mm^2 and Poisson's ratio = 0.3, the magnitude of the stress σ for no strain in BC is

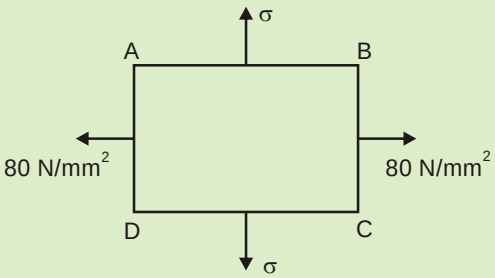

(a) 84 N/mm^2 (b) 64 N/mm^2
(c) 34 N/mm^2 (d) 24 N/mm^2

Ans. (d)

Sol.



$$E = 2 \times 10^5 \text{ N/mm}^2$$

$$\mu = 0.3$$

for no strain in BC

$$\frac{\sigma_1}{E} - \frac{\mu\sigma_2}{E} = 0$$

$$\Rightarrow \quad \sigma_1 = 0.3 \times 80$$

$$\Rightarrow \quad \sigma_1 = 24 \text{ N/mm}^2$$

22. In the cross-section of a timber, cambium layer can occur in

(a) Inner Bark and Sap Wood
(b) Pith and Heart Wood
(c) Sap Wood and Heart Wood
(d) Outer Bark and Sap Wood

Ans. (a)

Sol. Cambium layer occurs in innerbarks and sap wood.

23. Consider the following statements :

1. In the infinitesimal strain theory, dilatation is taken as an invariant.
2. Dilatation is not proportional to the algebraic sum of all normal stresses.
3. The shearing modulus is always less than the elastic modulus.

Which of the above statements is/are correct ?

(a) 1 only (b) 1 and 2 only
(c) 2 only (d) 1, 2 and 3

Ans. (d)

Sol. $\frac{E}{3} \le G \le \frac{E}{2}$

In infinitesimal strain theory displacement of material is much smaller than any relevant dimension of the body so that its geometry and properties of material can be assumed to be unchanged (i.e. dilation is taken as invariant).

24. Which one of the following represents constitutive relationship ?


(a) Vertical displacements in a structure
(b) Rotational displacements in a structure
(c) System of forces in equilibrium
(d) Stress-strain behavior of a material

Ans. (d)

Sol. Constitutive relation is relation between two physical quantities that is specific to the material.


Hence stress strain behaviour of solid material is constitutive relationship.

25. A square element of a structural part is subjected to biaxial stresses as shown in the figure. On a plane along BD, the intensity of the resultant stress due to these conditions will be

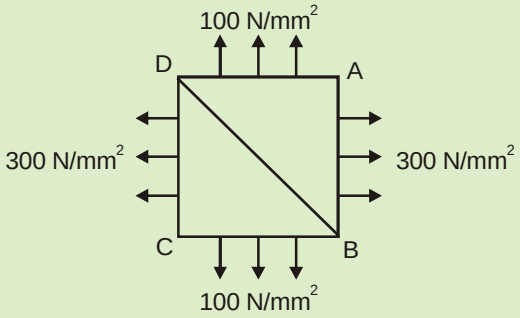

(a) $25\sqrt{5}\,\text{N/mm}^2$ (b) $50\sqrt{5}\,\text{N/mm}^2$
(c) $75\sqrt{5}\,\text{N/mm}^2$ (d) $100\sqrt{5}\,\text{N/mm}^2$

Ans. (d)

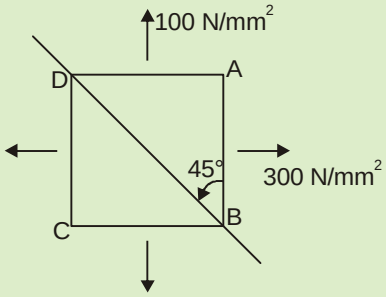

Hence BD is plane of maximum shear stress

$$\tau = \frac{\sigma_1 - \sigma_2}{2}$$


Shear stress $\tau = \frac{300-100}{2} = 100\ \text{N/mm}^2$

Normal stress $\sigma = \frac{\sigma_1 + \sigma_2}{2} = 200\ \text{N/mm}^2$

Resultant stress $= \sqrt{(100)^2 + (200)^2}$

$= 100\sqrt{5}\ \text{N/mm}^2$

26. A structural element is subjected to pure shear of 80 N/mm^2, as shown in the figure. The yield stresses both in tension and in compression are 240 N/mm^2. According to the maximum normal stress theory, the factors of safety in tension and compression are, respectively

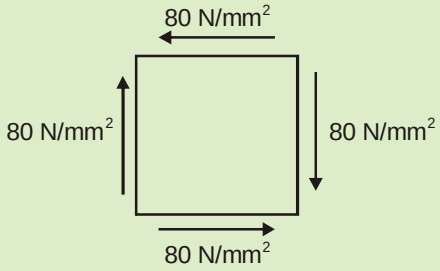

(a) 2 and 2 (b) 2.5 and 2.5
(c) 3 and 3 (d) 4 and 4

Ans. (c)

Sol. This is a case of pure shear.

Principal streses in this case is $(+\tau, -\tau)$

σ_1 = 80 N/mm^2 (Tension)

σ_2 = –80 N/mm^2 (Compresion)

Given σ_y = 240 N/mm^2

Factor of safety as per maximum normal stress theory = $\frac{\sigma_y}{\sigma}$

$= \frac{240}{80}$ $\left[\because |\sigma_1| = |\sigma_2|\right]$

= 3

27. Principal stresses at a point are 80 N/mm^2 and 40 N/mm^2, both tensile. The yield stress in simple tension for this material is 200 N/mm^2. The values of factors of safety according to maximum principal stress theory and maximum shear stress theory, respectively, are

(a) 2.5 and 2.5 (b) 2.5 and 5
(c) 5 and 5 (d) 5 and 1.67

Ans. (a)

Sol. Given $\sigma_1 = 80\text{N/mm}^2$, $\sigma_2 = 40\text{N/mm}^2$

σ_y = 200 N/mm^2

Max. principal stress = 80 N/mm^2 = σ_P

FOS as per Max. principal stress Theory

$= \frac{\sigma_y}{\sigma_P}$

$= \frac{200}{80} = 2.5$

Max. shear stress = Max. of $\left(\frac{\sigma_1 - \sigma_2}{2}, \frac{\sigma_1}{2}, \frac{\sigma_2}{2}\right)$

= Max. of $\left(\frac{80-40}{2}, \frac{80}{2}, \frac{40}{2}\right)$

$= \text{Max. of } (20, 40, 20)$

$= 40 \text{ N/mm}^2$

FOS as per Max. shear stress theroy $= \frac{\tau_{max}}{\tau}$

$= \left(\frac{200/2}{40}\right)$

$= 2.5$

28. The principal stresses at a point are 2σ (tensile) and σ (compressive), and the stress at elastic limit for the material in simple tension is 210 N/mm^2. According to maximum shear strain theory, the value of σ at failure is

(a) 70 N/mm^2 (b) 105 N/mm^2

(c) 140 N/mm^2 (d) 210 N/mm^2

Ans. (a)

Sol. Given $\sigma_1 = 2\sigma,\ \sigma_2 = -\sigma$

$\sigma_y = 210 \text{ N/mm}^2$

As per Max. shear strain theory.

$$\frac{\tau_{max}}{G} \le \frac{fy}{2G}$$

$$\tau_{max} = \text{Max. of } \left(\frac{\sigma_1 - \sigma_2}{2}, \frac{\sigma_1}{2}, \frac{\sigma_2}{2}\right)$$

$$= \text{Max. of } \left(\frac{2\sigma - (\sigma)}{2}, \frac{2\sigma}{2}, \frac{\sigma}{2}\right)$$

$$= \text{Max. of } \left(1.5\sigma, \sigma, \frac{\sigma}{2}\right)$$

$$= 1.5\sigma$$

$$\frac{1.5\sigma}{G} \le \frac{210}{2G}$$

$$\sigma \le \frac{210}{2 \times 1.5}$$

$$\sigma \le 70 \text{ N/mm}^2$$

29. A thin steel ruler having its cross-section of 0.0625 cm × 2.5 cm is bent by couples applied at its ends so that its length l equal to 25 cm, when bent, as a circular arc, subtends a central angel $\theta = 60°$. Take E = 2×10^6 kg/cm^2. The maximum stress induced in the ruler and the magnitude is


(a) 2618 kg/cm^2 (b) 2512 kg/cm^2

(c) 2406 kg/cm^2 (d) 2301 kg/cm^2

Ans. (a)

Sol. Given :

Cross-section of ruler = 0.0625 cm × 2.5 cm.

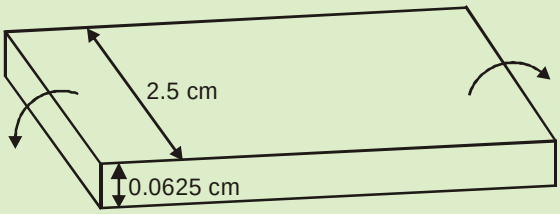


Angle subtended = 60°

$\therefore \quad l = R$

$$25 = R \times \frac{\pi}{180} \times 60$$

$\Rightarrow \quad R = 23.87 \text{ cm}$



Max. stress in the ruler will be on the extreme end.

$$\therefore \quad \frac{f}{y} = \frac{E}{R}$$

$$\frac{f}{\frac{0.0625}{2}} = \frac{2 \times 10^6}{23.87}$$

$\Rightarrow \quad f = 2618 \text{ Kg/cm}^2$

IES MASTER

Institute for Engineers (IES/GATE/PSUs)

ANNOUNCES

NEW BATCH FOR

IES | GATE | PSUs

AS PER NEW SYLLABUS OF ESE-2017

GENIUS BATCH

IES Master is launching an exclusive batch for the Smart Learners who are extraordinary, way above the rest. The Genius Batch shall focus on giving a cutting edge to the students by offering smart comprehensive learning skills.

- These are in fact regular batches with similar faculty, study material, tests, teaching pedagogy but all structured in a smart and efficient way due to the composition of the students.
- This is because the eligibility criterion of these batches is different resulting in faster pace and brilliant level of discussions and learning.



Commencing from

16th JUNE, 2016

(Branch: CE, ME, EE & ECE)

Apply Now!

Admission Open for

SESSION (2016-17)

SCROLL DOWN

FEATURES

- Suitable for those who wish to understand concepts and solve problems.
- Saving in time due to uniformity of students capability will leave more time for self study practice and revision and potential for higher ranks.
- Class notes will be provided in hard copy.
- Concepts will be explained thoroughly continuous practice with question solving and discussion will keep the students up to date with all the topics covered and revised.
- Daily tests will be held for practice and preparation for exams.
- Since all students will belong to the same intelligence quotient, there is more uniform and collective progress.
- Class by highly experienced faculty.

ELIGIBILITY

(Any one of the following)

- B.Tech or M.Tech from IIT/NIT/DTU
- Cleared written ES exam
- GATE Rank upto 2000
- Through Genius Batch Entrance Test.
- 70% in B.Tech from Private Engineering College / Any reputed college.

***Those students who do not satisfy above eligibility criteria can appear for GENIUS BATCH ENTRANCE TEST (*Conducted by IES Master*).**

About Genius Batch Entrance Test

IES Master believes that students who have not performed previously may also have inherent talent and hence they should be given opportunity without being biased by the previous track record. Thus IES MASTER is announcing Entrance test for student desirous of taking admission in Genius Batch but are not meeting the direct admission criteria.

Examination Date:

30 May 2016,
7 June 2016,
& 12 June 2016

Examination Time:

6:00 PM To 8:00 PM

Examination Pattern:

- Entire paper will be objective type
- Each question will be provided by 4 alternatives.
- Total questions - 100
  (General Aptitude-50 & Engineering Discipline-50)
- Exam Duration - 2 hour

Registration:

Registration Starting Date:
18th April, 2016.

(Registration Free)

Application Form:

Forms are Available at our Head office (F-126, Katwaria Sarai, New Delhi-110016

Can apply online 'www.iesmaster.org'.

Marking Scheme:

Total Marks - 100
(each question will carry 1 marks) & 1/3 marks will be deducted for a wrong answer.

Syllabus:

General Aptitude & Engineering Discipline

For Any Query -
8010009955, 01141013406
www.iesmaster.org

SCROLL DOWN

30. Which of the following statements are correct ?

1. Cranes are employable in moving and/or hoisting loads.
2. With the use of dipper and stick, power shovels can be used as hoes.
3. Ovedrive for higher speeds is a facility often used comfortably in the working of a tractor.
4. Clam shells are less desirable than draglines if the material is water-saturated.

(a) 1 and 4 only (b) 1 and 2 only
(c) 2 and 3 only (d) 3 and 4 only

Ans. (a)

31. Two similar bars of Steel and Aluminium are heated to a same temperature. Forces are applied at the ends of the bars to maintain their lengths unaltered. If the ratio of Young's moduli of Steel and Aluminium is 3, and the ratio of the coefficients of thermal expansion of Steel to that of aluminium is 0.5, what is the stress on the Aluminium bar if the stress on the Steel bar is 100 MPa ?

(a) 16.7 MPa (b) 66.7 MPa
(c) 136.7 MPa (d) 150.0 MPa

Ans. (b)

Sol. Given : $\frac{E_{steel}}{E_{Alumi}} = 3, \frac{\alpha_{steel}}{\alpha_{alumi}} = 0.5$

$$\sigma_{steel} = 100 MPa \ \ \sigma_{Aluni} = ?$$

We know,

$$\sigma = E \in$$

Here, $\in = \alpha T$


$$\therefore \quad \frac{\sigma_1}{\sigma_2} = \frac{E_1 \in_1}{E_2 \in_2}$$

$$\frac{\sigma_{steel}}{\sigma_{Alumi}} = \frac{E_{steel} \times \alpha_{steel} \times T}{E_{Alumi} \times \alpha_{Alumi} \times T}$$

$$\frac{100}{\sigma_{Alumi}} = 3 \times 0.5$$

$$\sigma_{Alumi} = \frac{100}{1.5} = 66.7 MPa$$


32. In order that the extreme fibre stresses in bending will be in the ratio 4:3 in the beam shown in the following figure, the width b of the upper flange (b < 10cm) of the beam section is to be



(a) 6.1 cm (b) 6.6 cm
(c) 5.1 cm (d) 5.6 cm

Ans. (d)

Sol. Since b < 10 cm, top fibre will have higher stress.

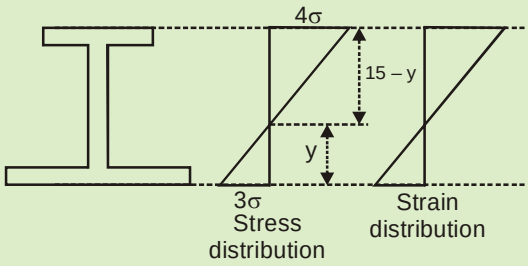

Let the stress in extreme fibres be 4σ and 3σ.

Let the distance of neutral axis from bottom = y. We know $\frac{f}{y} = \frac{M}{I} = \frac{E}{R}$

$$\therefore \quad \frac{4\sigma}{15-y} = \frac{3\sigma}{y}$$

$$4y = 45 - 3y$$

$$7y = 45$$

y = 6.428 cm from bottom

C.G. from bottom

$$= \frac{10\times2.5\times1.25+10\times2.5\times7.5+b\times2.5\times13.75}{10\times2.5+10\times2.5+b\times2.5}$$

$$= \frac{87.5+13.75b}{20+b}$$

Now, $\frac{87.5+13.75b}{20+b}=6.428$

$$\Rightarrow 87.5+13.75b=128.56+6.428b$$

$$7.322b = 41.06$$

$$\Rightarrow b = 5.6 \text{ cm}$$

33. A structural steel beam has an unsymmetrical I-cross-section. The overall depth of the beam is 200 mm. The flange stresses at the top and bottom are 120 N/mm^2 and 80 N/mm^2, respectively. The depth of the natural axis from the top of the beam will be

(a) 120 mm (b) 100 mm

(c) 80 mm (d) 60 mm

Ans. (a)

Sol. Overall depth = 200 mm.

$$\sigma_{top} = 120 \text{ N/mm}^2$$

$$\sigma_{bottom} = 80 \text{ N/mm}^2$$

Let the depth of netural axis from top = y

$$\because \quad \frac{f_1}{y_1}=\frac{f_2}{y_2}$$

$$\frac{120}{y}=\frac{80}{200-y}$$


$$2(200-y) = 2y$$

$$600-3y = 2y$$

$$y = \frac{600}{5}$$

$$= 120 \text{ mm from top.}$$

34. The bending moment at A for the beam shown below (With BD being a rigid bar) is

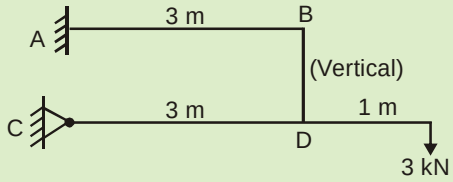


(a) Zero (b) 12 kN-m

(c) 8 kN-m (d) 6 kN-m

Ans. (b)

Sol.

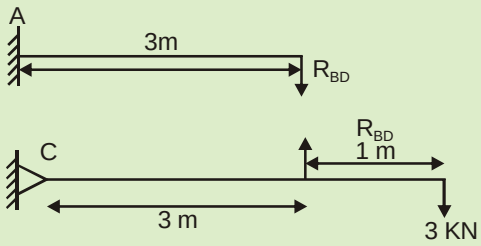

Since, there is a hinge at C,

$$\therefore \quad \Sigma M_C = 0$$

$$3\times4-R_{BD}\times3=0$$

$$\Rightarrow R_{BD} = 4 \text{ KN}$$


Now,

$$M_A = R_{BD} \times 3$$

$$= 4 \times 3$$

$$= 12 \text{ KNm}$$

Alternatively

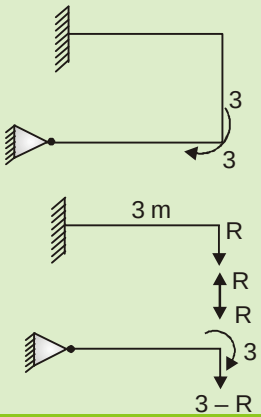



$\Rightarrow (3 - R) \times 3 + 3 = 0$


$\Rightarrow \quad R = 4$


$\Rightarrow \quad M_A = 4 \times 3 = 12$ kNm


35. The bending moment diagram for the beam shown below is

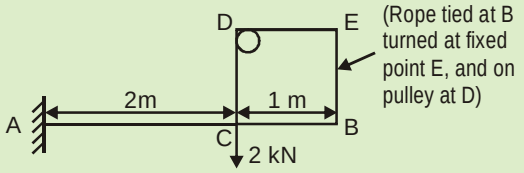

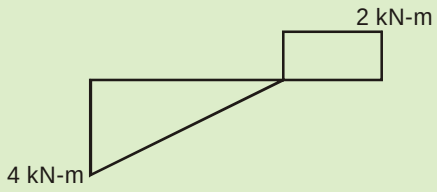(a)

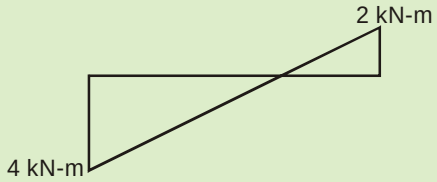
(b)

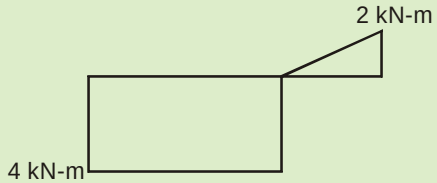
(c)

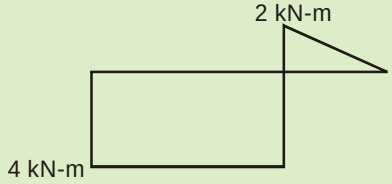
(d)


Ans. (*)

36. A circular shaft rotates at 200 rpm and is subject to a torque of 1500 Nm. The power transmitted would be

(a) 10πkW (b) 15πkW

(c) 20πkW (d) 30πkW

Ans. (a)

Sol. Given N = 200 rpm, T = 1500 Nm


$$\omega = \frac{2\pi N}{60} = \frac{2\pi \times 200}{60} = \frac{20}{3}\pi \text{ rad/s}$$

$$P = T.\omega$$

$$= 1500 \times \frac{20\pi}{3} = 10000\pi \text{ watt}$$

$$= 10\pi \text{ kW}$$

37. Torques are transmitted to the solid circular shaft as shown in the figure below. If the corresponding permissible stress in the shaft is 60 N/mm^2, the diameter of the shaft is nearly.

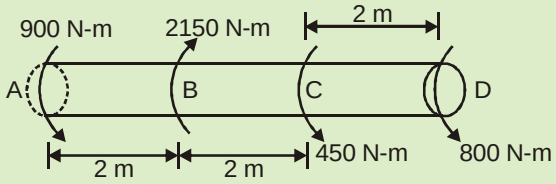


(a) 57.3 mm (b) 47.3 mm

(c) 37.3 mm (d) 27.3 mm

Ans. (b)

Sol.

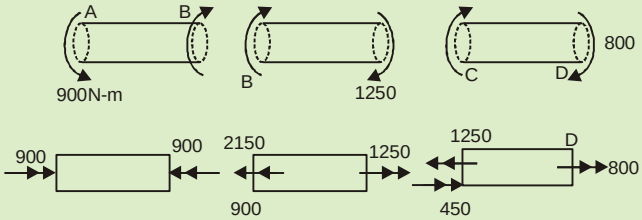

Max. torque at ny section = 1250 N – m

$$\tau_{perm} = 60 \text{N/m}^2$$

$$\because \quad \frac{\tau}{r} = \frac{T}{J}$$

$$\therefore \quad \frac{60}{d/2} = \frac{1250 \times 1000}{\pi d^4/32}$$

$$\Rightarrow \quad d = 47.34 \text{ mm}$$

38. A solid circular shaft has a diameter d. It polar modulus will be

(a) $\frac{\pi}{16}d^2$ (b) $\frac{\pi}{64}d^3$

(c) $\frac{\pi}{16}d^3$ (d) $\frac{\pi}{32}d^2$

Ans. (c)

Sol. Polar moment of inertia for a

Circular saft = $\frac{\pi d^4}{32}$

Plar modulus = $\frac{J}{y}=\frac{\pi d^4}{32\times\frac{d}{2}}$

$=\frac{\pi d^3}{16}$

Where y = distance of maximum stress fibre from centre.


39. A hollow steel shaft has outside diameter and inside diameter d/2. The value of d for the shaft, if it has to transmit 200 hp at 105 rpm with a working shear stress of 420 kg/cm^2, is

(a) 5.6 cm (b) 2.6 cm

(c) 12.1 cm (d) 15.5 cm

Ans. (a)

Sol.



Given, P = 200 hP,

N = 105 rpm

τ_{max} = 420 Kg/cm^2

P = T.ω

$200 \times 746 = T\times\frac{2\pi\times105}{60}$

T = 13569 N-m

As we know,

$\frac{\tau}{r}=\frac{T}{J}$


$\frac{420}{d/2}=\frac{13569}{\frac{\pi}{32}\left(d^4-\left(\frac{d}{2}\right)^4\right)}$

$\frac{840}{d}=\frac{13569}{\frac{\pi}{32}\times\frac{15}{16}\times d^4}$

$\Rightarrow$ d = 5.6 cm

40. Two thin-walled tubular members made of the same material have the same length, same wall thickness and same total weight and are both subjected to the same torque of magnitude T. If the individual cross-sections are circular and square, respectively, as in the figures, then the ratios of the shear stress τ reckoned for the circular member in relation to the square member will be

Figures not to scale

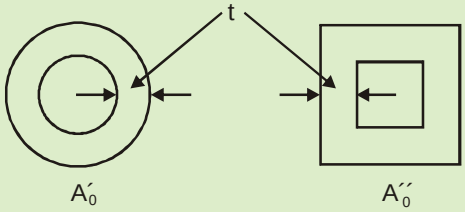


(a) 0.785 (b) 0.905

(c) 0.616 (d) 0.513


Ans. (a)

Sol. For thin walled section shear stress $\tau=\frac{T}{2tA_m}$

A_m = mean area



Weight of the two member is same hence

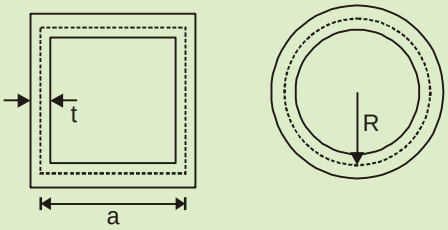

$$4at = 2\pi R \times t$$

$$a = \frac{\pi R}{2}$$

Ratio of spear stress,

$$\frac{\tau_c}{\tau_s} = \frac{\left(\frac{T}{2A_m t}\right)_c}{\left(\frac{T}{2A_m t}\right)_s}$$

$A_{ms} \approx a^2$, $A_{mc} = \pi R^2$ neglecting thickness

$$\frac{\tau_c}{\tau_s} = \frac{A_{ms}}{A_{mc}} = \frac{a^2}{\pi R^2}$$

$$\frac{\tau_c}{\tau_s} = \frac{\left(\frac{\pi R}{2}\right)^2}{\pi R^2} = \frac{\pi}{4} = 0.785$$

41. In the analysis of beams subjected to loads, the point with Nil Bending Moment can be a

1. Point of Contraflexure
2. Point of Maximum Shear Force
3. Point of Inflection

Which of the above statements is/are correct ?

(a) 1 only (b) 2 only
(c) 3 only (d) 1, 2 and 3

Ans. (a)

Sol.




42. A mild steel bar, 1.5 m long, has a square section 40 mm × 40 mm. The bar is subjected to a two-dimensional stress, σ_x =310 N/mm^2 (tensile) and σ_y =300 N/mm^2 (compressive). E=2×10^5 N/mm^2, Poisson's ratio $\mu = 0.3$. The elongation of the bar is the direction of σ_x will be

(a) 1.25 mm (b) 1.75 mm
(c) 2.25 mm (d) 3 mm

Ans. (d)

Sol.



$l = 1.5$ m

$\sigma_x = 310$ N/mm^2

$\sigma_y = -300$ N/mm^2

$$\varepsilon_x = \frac{\sigma_x}{\varepsilon} - \frac{\mu\sigma_y}{\varepsilon}$$

$$= \frac{310}{2\times10^5} - \frac{0.3\times(-300)}{2\times10^5}$$

$$\frac{\delta}{l} = 0.002$$

$$\delta = 0.002 \times 1500$$

$$= 3 \text{ mm}$$

43. A tractor has a permissible loaded speed of 200 m/minute, which can increase by 25% when the load is removed/deposited. Generally, it is operated at 80% of the permissible speed (loaded unloaded). It works at a location where haul distance is 120 m. Rest allowance per round-trip is taken as 50 seconds on an average. Fixed time per trip, for loading and

IES MASTER

Institute for Engineers (IES/GATE/PSUs)

Awards for

THE ACHIEVERS IN ESE - 2016

1st



2nd



3rd



4th - 20th



21st - 100th will get consolation prizes

NOTE :

1. The student must be of Classroom program/Online Test Series/ Interview Guidance/ Classroom Test Series/ Conventional Question Practice Program of **IES MASTER**.
2. Students who are enrolled in more than one course will be entitled only to a single prize based on their rank.

In all cases, the decision of the management of **IES MASTER** *shall be final.*

F-126, Katwaria Sarai, New Delhi - 110 016 | Ph.: 011-41013406 | M. : 9711853908, 8130909220
Web : www.iesmaster.org | E-mail : ies_master@yahoo.co.in

SCROLL DOWN

unloading and turnaround, etc., is 30 seconds. What is its effective cycle time ?

(a) 157 seconds (b) 161 seconds
(c) 173 seconds (d) 182 seconds

Ans. (b)

Sol. Running speed of loaded tractor

$= 200 \times 0.8 = 160$ m/minute

Running speed of unloaded tractor

$= 200 \times 1.25 \times 0.8$


$= 200$ m/minute

Total time for the trip

$$= \frac{120\times 60}{160} + \frac{120\times 60}{200} + 50 + 30$$

$= 161$ seconds


44. The bending moment at A for the beam shown below (not to scale) is

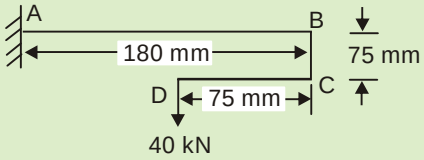


(a) 3200 kN.mm (b) 3600 kN.mm
(c) 4200 kN.mm (d) 4800 kN.mm

Ans. (c)

Sol.

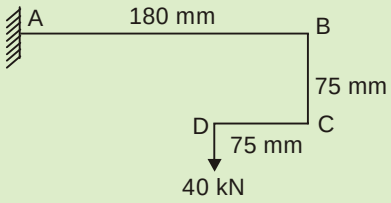


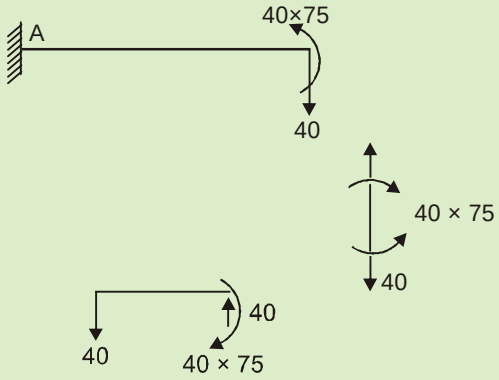

$M_A = 40 \times 45 - 40 \times 180$


$= -4200$ kNmm

45. In the pin-end cantilever truss shown below, member FG had been fabricated 10 mm longer than required. How much will point E deflect vertically ?



(a) 10 mm (b) 20 mm
(c) 30 mm (d) 40 mm

Ans. (c)

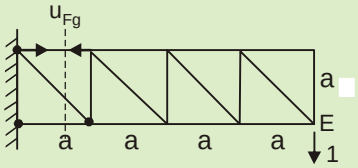

$U_{Fg} \times a = 1 \times 3a$

$U_{Fg} = 3$

$\delta_E = \Sigma u_i \lambda_i = 10 \times 3 = 30$ mm

46. The purpose of lateral ties in a short RC column is to

(a) Avoid buckling of longitudinal bars
(b) Facilitate compaction of concrete

(c) Increase the load carrying capacity of the column
(d) Facilitate construction

Ans. (a)

Sol. Lateral ties are provided to avoid buckling of longitudinal bars.

47. When a two-hinged parabolic arch is subjected to a rise in ambient temperature, the horizontal thrust at the support will


(a) Increase
(b) Decrease
(c) Remain same
(d) Increase or decrease depending on the span

Ans. (a)

Sol. Horizontal thrust due to increases in temperature by ΔT

$$H = \frac{\alpha \cdot \Delta t \cdot l}{\int_0^l \frac{y^2 ds}{EI}}$$


48. The degree of static indeterminacy for a rigid frame as shown below is



(a) 0 (b) 1
(c) 2 (d) 3

Ans. (b)

Sol.

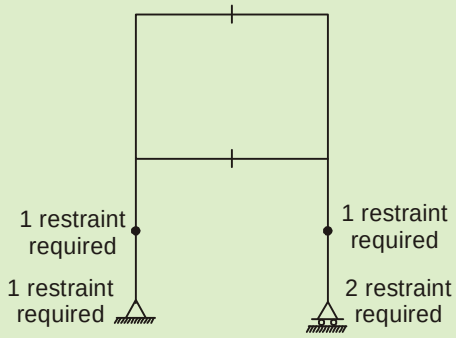

No. of cuts required = 2

No. of restraint required = 1 + 2 + 2 = 5

Degree of static

indeterminacy = 3C – r
= 3 × 2 – 5 = 1

49. In the slope-deflection equations, deformations are considered to be caused by

(a) Shear forces and bending moments only
(b) Axial forces, shear forces and bending moments
(c) Axial forces and bending moments only
(d) Bending moments only

Ans. (d)

Sol. In slope deflection equation, deformation are considered to be caused by bending moments only.

50. The maximum bending moment caused by a set of concentrated moving loads is

(a) Always at the midpoint of span
(b) Between the midpoint and concentrated load next to the midpoint of the span
(c) Not definable
(d) Always under a load close to the centroid of the set of loads

Ans. (d)

Sol. The maximum bending moment caused by a set of concentrated moving loads occurs when the mid point of span lies midway between the C.G. of load and the concerned load. Max B.M. always occurs under a load.

51. Force method of analysis of a structure is particularly preferred when

1. The degrees of freedom of the structure become large
2. The structure has less number of static, and more number of kinematic, indeterminacies
3. The structure has more numbers of static, and less numbers of kinematic, indeterminacies

(a) 1 only (b) 2 only
(c) 3 only (d) 1, 2 and 3

Ans. (b)

Sol. Force method uses force as basic unknown variable which is a function as static indeterminacies so, force method is preferred when there is less no. of static and more numbers of kinematic indelerminacies.

52. Stiffness matrix method is the category of

1. Compatibility method
2. Displacement method
3. Force method
4. Equilibrium method

(a) 1 and 3 only (b) 1 and 4 only
(c) 2 and 3 only (d) 2 and 4 only

Ans. (d)

Ans. Stiffness matrix method is modification of slope deflection method which uses equilibrium equation to determine the kinematic (displacement) response of structure and then force response

53. Muller-Breslau Principal for obtaining influence lines is applicable to

1. Statically determinate beams and frame
2. Statically indeterminate structures, the material of which is elastic, and follows Hooke's law.
3. Any statically indeterminate structure

(a) 1 and 2 only (b) 1 only
(c) 2 only (d) 1 and 3 only

Ans. (a)

54. The plastic neutral axis

1. Divides the given section into two equal halves
2. Divides the given section into two unequal parts
3. Lies on the centroidal axis of the section

(a) 1 only (b) 2 only
(c) 3 only (d) 2 and 3 only

Ans. (a)

55. The plastic moment capacity M_P is

(a) Less than the yield moment
(b) Equal to the yield moment
(c) Greater than the yield moment
(d) Dependent on section dimensions

Ans. (c)

Sol. Plastic moment capacity is greater than the yield moment because in plastic stage all the fibres are yielded where as in other only outer fibre yieldes.

56. Web crippling is caused by

(a) Excessive bending moment

(b) Failure of web under point loads

IES MASTER

Institute for Engineers (IES/GATE/PSUs)

ANNOUNCES

NEW BATCH FOR

IES | GATE | PSUs

AS PER NEW SYLLABUS OF ESE-2017

CIVIL	MECHANICAL	EE & ECE
REGULAR (EVE.) (Genius Batch) 16th June, 2016	**REGULAR** 20th June, 2016	**REGULAR** 20th June, 2016
REGULAR (AFT.) 13th June, 2016		
WEEKEND 18th June, 2016	**WEEKEND** 18th June, 2016	**WEEKEND** 18th June, 2016

Genius BATCH



— Commencing from —

16th June, 2016

(Branch: CE, ME, EE & ECE)

ADMISSION OPEN FOR

SESSION (2016-17)

APPLY NOW!

www.iesmaster.org

8010009955

Office: F-126, Katwaria Sarai, New Delhi - 110 016

SCROLL DOWN

(c) Width of flanges
(d) Column action of web

Ans. (b)

Sol. Web crippling is actually local buckling that occur when the web is slender. It occur due to high magnitude of point load which result in stress concentration and bearing failure.

57. The block shear failure of a bolted joint in tension occurs because of

1. Use of higher shear strength bolts
2. Use of paltes with higher bearing strength

(a) 1 only (b) 2 only
(c) Both 1 and 2 (d) Neithter 1 nor 2

Ans. (c)

Ans. When high shear strength bolt and high bearing strength plates are used, length of connection gets reduced leading to block shear failure

58. As per IS code, the maximum longitudinal pitch allowed in bolted joints of tension members is nominally

(a) 12 times the thickness of the plate
(b) 12 times the diameter of the bolt
(c) 16 times the thickness of the plate
(d) 16 times the diameter of the bolt

Ans.(c)

Sol. maximum longitudinal pitch allowed is 16 times the thickness as the plate

59. ISMB 100 (r_x = 40 mm, r_y = 10 mm) has been used as a column in a industrial shed. Along the minor axis, the the column has restraints in the form of purlins at 1.0 m intervals. Effective length factor along major and minor axes are 1.2 and 1.0, respectively. If the slenderness ratio is restricted to 120, the maximum column height will be

(a) 1.0 m (b) 2.4 m
(c) 4.0 m (d) 4.8 m

Ans. (c)

Sol. $S_r = 1.2 \times \frac{L}{r_y}$

$120 = 1.2 \times \frac{L}{40}$

L = 4.0 m

60. As per IS 800 – 2007, the permitted slenderness ratio for a bracing member in case of hangers shall be

(a) 140 (b) 145
(c) 150 (d) 160

Ans. (d)

Sol. Clause 12.8.2.2 of IS 800 : 2007

61. A rectangular beam of depth d is under bending. Load has been gradually increased when the top fibre has obtained five times the strain at the first yield. What detph of the beam will still respond by elastic conditions?


(a) 0.16 d (b) 0.20 d
(c) 0.25 d (d) 0.40

Ans. (b)

Sol. $\phi = \frac{5 \in y}{\frac{d}{2}} = \frac{\in y}{x}$

$x = \frac{d}{10} = 0.1d$

depth of elastic section = 2x = 0.2d

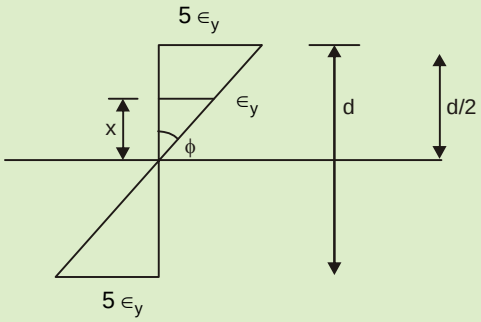

62. The ultimate moment capacity of a mild steel section is usually

(a) Equal to the plastic moment capacity

(b) More than the yield moment capacity

(c) Let than the yield moment capacity

(d) More than the plastic moment capacity

Ans. (a)

63. The portal bracing in a truss-bridge is used to

(a) Transfer load from top of end posts to bearings

(b) Maintain the rectangular shape of the bridge cross-section

(c) Stiffen the structure laterally

(d) Prevent the buckling of top chord under side sway

Ans. (c)

Sol. Portal bracing stiffens the structure laterally and transfer the wind and seismic load from top of end posts to bearing.

64. Consider the following cases in the design of reinforced concrete members in flexure:

1. Over-reinforced section
2. Tension failure
3. Compression failure
4. Under-reinforced section

Which of the above cases are considered for safe design of R.C members in flexure?

(a) 1 and 2 only (b) 2 and 4 only

(c) 3 and 4 only (d) 1 and 3 only

Ans. (b)

Sol. Under-reinforced section which result in tension failure give ample warning before collapse.

65. The bond between steel and concrete is mainly due to

1. Mechanical resistance
2. Pure adhesive resistance
3. Frictional resistance

(a) 1 and 2 only (b) 1 and 3 only

(c) 2 and 3 only (d) 1, 2 and 3

Ans. (d)

Sol. 1. Mechanical resistacne is developed due to bearing stress against the rib. whereas friction and adhesive property develop at the contact of steel and concrete.

66. The carbonation process is demonstrated more by

(a) Atmospheric corrosion

(b) Choloride corrosion

(c) Stress corrosion

(d) Hydrogen embrittlement

Ans. (a)

Carbonation occure when carbon dioxide from the air penetrates the concrete and reacts with hydroxides such as cacium hydroxide to form cabonates

$Ca(oH)_2 + CO_2 \longrightarrow CaCo_3 + H_2O$

This reaction reduces the pH of the pore solution as low as 8.5, at which the passive film on the steel is not stable.

67. When a sprially reinforced short column is loaded axially, the concrete inside the core is subjected to

(a) Bending and compression

(b) Biaxial compression

(c) Triaxial compression

(d) Uniaxial compression

Ans. (c)

The concrete inside the core is subjected to tri-axial compression. It is confined by hoop stress in spiral reinforcement and axial load transfer path.

68. In a reinforced concrete section, shear stress distribution is diagrammatically

(a) Wholly Parabolic


(b) Wholly Rectangular

(c) Parabolic above NA and Rectangular below NA

(d) Rectangular above NA and Parabolic below NA

Ans. (c)

Sol.

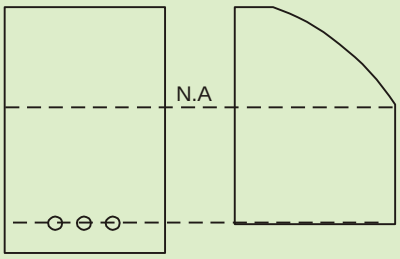

69. As per IS 456 – 2000, the maximum permissible shear stress, τ_{Cmax}, is based on

(a) Diagonal tension failure

(b) Diagonal compression failure

(c) Flexural tension failure

(d) Flexural compression failure

Ans. (b)

Sol. τ_{cmax} is based on diagonal compression failure.

70. Footings shall be designed to sustain the

1. Applied loads
2. Moments and forces under relatable loading conditions
3. Induced reactions

(a) 1and 2 only (b) 1 and 3 only

(c) 2 and 3 only (d) 1, 2 and 3

Ans. (d)

Sol. As per IS 456 : Clause 34.1

71. Reinforced concrete slabs are designed for

1. Shear
2. Flexure
3. Positive bending moment
4. Negative bending moment

(a) 1, 2 and 3 only (b) 1 and 4 only

(c) 2, 3 and 4 only (d) 1, 2, 3 and 4

Ans. (c)

Sol. Slabs are designed for bending and deflection and not designed for shear because

(i) Slabs have much small depth than beams.

(ii) Most of slabs subjected to uniformly distributed loads.

72. As compared to the working stress method of design, the limit state method of design premises that the concrete can admit

(a) A lower stress level

(b) A higher stress level

(c) Occasionally higher, but usually lower, stress level

(d) Only the same stress level

Ans. (b)

73. The bending stress in a T-beam section is maximum

1. At top fibre
2. At centroidal fibre
3. At bottom fibre

(a) 1 only (b) 2 only

(c) 3 only

(d) At a level which is dependent on the loading condition.

Ans. (d)

Sol. At lower stress value bottom fibre has maximum stress whereas if we increase loading, concrete under tension undergoes cracking in such condition maximum bending stress can be at top fibre

74. If the loading on a simply supported pre-stressed concrete beam is uniformly distributed, the centriod fo the pre-stressing tendon should be as

(a) A straight profile along the lower edge of the kern

(b) A parabolic profile with convexity downward

(c) A straight profile along the centriodal axis

(d) A circular profile with convexity upward

Ans. (b)

Sol. The centriod profile as tendon must be provided such that section is under uniform compression. For uniformly destributed loading a parabolic profile with convexity downward is provided.

75. In a post-tension pre-stressed concrete beam, the end block zone is in between the end of the beam and the section where

(a) The shear stresses are maximum

(b) Only shear stresses exist

(c) No lateral stresses exist

(d) Only longitudinal stresses exist

Ans. (d)

Sol. The zone between the end of the beam and the section where only longitudinal stress exist is generally referred to as the anchorage zone or end block zone.

76. In the pre-tensioning method

1. Tension in concrete is induced directly by external force
2. Tension is induced in the tendons before concreting
3. Concrete continues to be in tension after pre-stressing

(a) 1 only (b) 2 only

(c) 3 only (d) 1 and 3 only

Ans. (b)

Sol. In pretensioning, tension is induced in the tendons before concreting. Once the concrete sets and hardens, tendons are cut and prestress is transferred to concrete. Hence after application of prestress, concrete is in compression.

77. Flexural collapse in over-reinforced beams is due to

(a) Primary compression failure

(b) Secondary compression failure

(c) Primary tension failure
(d) Bond failure

Ans. (b)

Sol. Over reinforced beam undergo compression failure which is a sudden failure due to crushing of concrete in compression zone. this type of failure of compression zone is called secondary compression failure.

78. If a beam is likely to fail due to high bonding stresses, then its bond strength can be increased most economically by

(a) Providing vertical stirrups
(b) Increasing the depth of the beam
(c) Using smaller diameter bars in correspondingly more numbers
(d) Using higher diameter bars by reducing their numbers

Ans. (c)

Sol. To increase bond strength we should use smaller diameter bars in correspondingly large numbers (such that area of steel remains same). This would effectively increase surface area of contact between steel and concrete.

Stirrups are used in beams to counter shear force. Increase in depth of beam would not bring any change in bond strength.

79. A single-acting reciprocating pump has a stroke of 25 cm, speed of 135 rpm, and a piston of 30 cm diameter. If its slip has been estimated as 4% at a particular operating condition, what is the corresponding realized discharge through a height of 14 m?

(a) 33·2 *l*ps (b) 35·6 *l*ps
(c) 37·0 *l*ps (d) 38·2 *l*ps

Ans. (d)

Sol. L = Stroke length = 25 cm
N = speed = 135 rpm
D = Dia. of piston = 30 cm
Slip = 4%

$$\%\ \text{slip} = \left(1-\frac{Q_{acutal}}{Q_{Theotical}}\right)\times 100$$

$$\Rightarrow \quad 4 = \left(1-\frac{Q_{acutal}}{\frac{ALN}{60}}\right)\times 100$$

$$4 = \left(1-\frac{Q_{ac}}{\frac{\pi}{4}(D)^2\times L\times\frac{N}{60}}\right)\times 100$$

$$(1-0.04)\frac{\pi}{4}(0.3)^2\times 0.25\times\frac{135}{60} = Q_{ac}\ (m^3/s)$$

$$= 38.17\ l/s$$

80. In the design of pre-stressed concrete structures, which of the following limit states will qualilfy as the limit states of serviceability?

1. Flexural
2. Shear
3. Deflection
4. Cracking

(a) 1 and 2 only (b) 3 and 4 only
(c) 1 and 4 only (d) 2 and 3 only

Ans. (b)

Sol. In the method of design based on limit state concept, the structure shall be designed to

safely all loads liable to act on it. The resistance to bending, shear, torsion and axial loads at every section shall not be less than the appropriate value at that section produced by the probable most unfavorable combination of loads on the structure using the appropriate partial safety factors. This constitutes assessing limit state of collapse.

The structure shall also satisfy limit states of serviceability requirements, such as limitations on deflection and cracking.

81. Consider the following statements:

1. Pumps used in series are generally of the centrifugal type.
2. Centrifugal pumps, though yielding comparatively smaller discharges than axial flow pumps, yield higher heads (at each stage) compared to axial flow pumps.

Which of the above statements is/are correct?

(a) 1 only (b) 2 only
(c) Both 1 and 2 (d) Neither 1 nor 2

Ans. (c)

82. When steel reinforcing bars are provided in masonry, the bars shall have an embedment with adequate cover in cement-sand mortar not leaner than

(a) 1 : 3 (b) 1 : 4
(c) 1 : 5 (d) 1 : 6

Ans. (a)

Nature of work	Type of Cement Mortar	Type of Line Mortar
Reinforced Brikwork	1:3 which means 1 part cemnt. 3 part Scmed (in term of volume)	
Plaster work	1:3 to 1:4	1:2
Stone Masonary with ordinary stones	1:6	1:2 lime being hydraulic lime
Stone Masonary with best variety of stones		1:2 lime being hydraulic lime
Think joints in brickwork		1:3; lime being fat lime
General RCC works	1:3	
Construction work in water logged areas & exposed conditions	1:3	1:3 lime being hydraulic lime
Damp proof courses and cement - concrete roads	1:2	

83. The efficacy of pumpcrete is based primarily on

1. The capacity of pump
2. The aggregate size, which should not exceed 8 cm
3. The diameter of pipe being large, with more than 30 cm being desirable
4. The performance of the agitator

(a) 1 and 4 only (b) 1 and 2 only
(c) 3 and 4 only (d) 2 and 3 only

Ans. (a)

Sol. Efficiency of concrete pump depends on

- Length of horizontal pipe–300 to 400 m
- Length of vertical pipe

- Number of bends
- Diameter of pipe line (150 mm – 200 mm)
- Slump of concrete (> 75 mm)
- Capacity of pump
- Maximum size of Aggregate = 40 mm
- Performance of Agitation

84. In a non-tilting type drum mixer,

1. Large size aggregate up to 20 – 25 cm can be handled
2. Mixing time is less than 2 minutes
3. Discharge is through buckets onto the platform
4. For large size mixers, the mixing time should be slightly increased if handling more than 800 litres of the mix

Which of the above statements are correct?

(a) 1 and 2 only (b) 2 and 3 only
(c) 1, 2 and 4 only (d) 3 and 4 only

Ans. (d)

Sol. In Non tilting mixtures large size of aggregates upto 80 mm can be used.

As per IS-456 : 2000 mixing time shall be closer to 2 min

85. How many impellers are required for a multi-stage pump to lift 4000 /pm against a total head of 80 m at a speed of 750 rpm; given that N_s for each impeller should be between 720 to 780 units?

(a) 6 (b) 5
(c) 4 (d) 3

Ans. (b)

Sol. $$N_S = \frac{N\sqrt{Q}}{H_m^{3/4}}$$

$$\frac{720+780}{2} = \frac{750\times\sqrt{4000/60}}{H_n^{3/4}}$$

$$\Rightarrow \quad H_m = 16 \text{ m}$$

$$\Rightarrow \quad \text{No. of impellers} = \frac{80}{16} = 5$$

86. A 15 cm centrifugal pump delivers 6 /ps at a head of 26 m running at a speed of 1350 rpm. A similarly designed pump of 20 cm size runs at the same speed. What are the most likely nearest magnitudes of discharge and delivery head provided by the latter pump?

(a) 11 /ps and 46 m (b) 14 /ps and 52 m
(c) 11 /ps and 52 m (d) 14 /ps and 46 m

Ans. (d)

Sol.

Pump 1	Pump 2
$D = 15$ cm	$D_1 = 20$ cm
$Q = 6$ /ps	$Q_1 =$
$H = 26$ m	$H_1 =$
$N = 1350$ rpm	$N_1 = 1350$ rpm

$$\frac{ND}{\sqrt{H}} = \frac{N_1D_1}{\sqrt{H_1}}$$

$$\frac{15}{\sqrt{26}} = \frac{20}{\sqrt{H_1}}$$

$$H_1 = 46.22 \text{ m}$$

Also $$\frac{Q}{D^3N} = \frac{Q_1}{D_1^3N_1}$$

$$\Rightarrow \quad Q_1 = 6\times\left(\frac{20}{15}\right)^3$$

$$= 14.22 \text{ lps}$$


87. Which fo the following statements are correct as operating characteristics of centrifugal pump?

1. As discharge increases from zero value, head slightly increases; then the head declines gently; and beyond a certain discharge, the head falls steeply.
2. As discharge increases, efficiency increases from zero, rising fast to a maximum value and then falls rapidly, more rapidly than the head-discharge curve.
3. BHP increases from a non-zero (positive) value at zero discharge, the increase being only moderate before it starts falling beyond a certain discharge.

(a) 1, 2 and 3 (b) 1 and 2 only
(c) 1 and 3 only (d) 2 and 3 only

Ans. (a)

Sol.



88. Engines used in earthwork equipment are qualified by the power developed under sepcified conditions. As operating conditions change, the power developed will increase with local ambience, if

1. Ambient temperature increases
2. Ambient temperature decreases
3. Ambient pressure increases
4. Ambient pressure decreases

Which of the above statements are correct?

(a) 1 and 3 only (b) 1 and 4 only
(c) 2 and 3 only (d) 2 and 4 only

Ans. (c)

Sol. $H_0 = H_S \times \frac{P_0}{P_S} \times \sqrt{\frac{T_S}{T_0}}$

H_0 = Observed horse power
H_S = Standard horse power
P_0 = Observed barometric pressure
P_S = Standard barometric pressure
T_S = Absolute temperature for standard conditions
T_0 = Absolute temperature for observed condition.

Power increases when pressure increases and temperature decreases.

89. Manometric head developed h_m in m, and discharge Q in *l*ps in respect of two pumps, 1 and 2, are tabulated. The pumps are connected in series against a static head of 100 m. Total head losses for a discharge of Q are as $\frac{Q^2}{100}$(m). What is the delivered discharge?

Q in *l*ps	15	18	20	22	25
h_{m1} in m	60·6	61·2	62·0	55·0	48·0
h_{m1} in m	50·8	51·0	48·8	45·8	40·0

(a) 20·15 *l*ps (b) 21·25 *l*ps
(c) 21·95 *l*ps (d) 22·20 *l*ps

Ans. (b)

Sol.

Q	Available head	Required head $\left(100+\frac{Q^2}{100}\right)$ neglecting velocity head $\frac{V_d^2}{2g}$
15	111.4	102.25
18	112.2	103.24
20	110.8	104.0
21	105.8	104.41
21.5	103.3	104.615
22	100.8	104.82
25	88.0	106.25

Hence, discharge Q will lie between 21 and 21.5.

90. A reciprocating pump has a stroke of 30 cm, spped of 100 rpm, and a piston of $22\cdot5$ cm diameter. It discharge and $18\cdot9$ *l*ps. What is the slip of the pump?

(a) 3.12 % (b) $3\cdot54\%$

(c) $4\cdot15\%$ (d) $4\cdot95\%$

Ans. (d)

Sol. $\%\text{slip} = \left(1-\frac{Q_{ac}}{Q_{th}}\right)\times 100$

$Q_{th} = \frac{ACN}{60} = \frac{\pi}{4}(0.225)^2\times 0.3\times\frac{100}{60}\ m^3/s$

$= 0.01987\ m^3/s$

$= 19.87\ l/s$

$Q_{ac} = 18.9\ l/s$

$\Rightarrow$ % slip $= \left(1-\frac{18.9}{19.87}\right)\times 100 = 4.95\%$

91. The following data were recorded when a centrifugal pump worked at its maximum efficiency: Q = 40 *l*ps; Manometric head developed = 25 m; Input shaft horse power = 11.9 W. What is the non-dimensional specific speed of the pump it it was running at 1500 rpm? (May adopt the following (all in S.I. units):

$g^{1/4} = 1\cdot77$, $g^{1/2} = 3\cdot132$, $g^{3/4} = 5\cdot544$,

$\sqrt{2} = 1\cdot414$, $\sqrt{5} = 2.236$ and $\sqrt{10} = 3\cdot162$)

(a) 165 (b) 155

(c) 145 (d) 135

Ans. (b)

Sol. Given that ϕ = 40 lps (centrifugal pump)

manometric head, H_m = 25 m

Non dimensional specific speed $N_s = \frac{N\sqrt{Q}}{(gH_m)^{3/4}}$

$N_S = \frac{1500\times\sqrt{40}}{(9.81\times 25)^{3/4}}$

N_S =153.07 rpm

(Discharge has been taken in lps instead of m^3/s which is actually not correct).

92. The total head to be developed by a centrifugal pump is expected to be up to 50 m. The normal ratio of radii of impeller rim and impeller eye of 2 is maintained. The design is for a speed of 1300 rpm, What is the nominal diameter of the impeller? Take $\sqrt{g} = 3\cdot13$ and $\frac{1}{\pi} = 0\cdot318$.

(a) 53 cm (b) 57 cm

(c) 60 cm (d) 64 cm

Ans. (a)

For starting of pump min centrifugal head developed $\geq H_m$

Hence,

$$H_m = \frac{\left(\frac{\pi D_B N}{60}\right)^2 - \left(\frac{\pi D_A N}{60}\right)^2}{2g} = 50 \text{ m}$$


Given that $\frac{D_B}{D_A} = 2$

$$\left(\frac{\pi D_B N}{60}\right)^2 \left[1 - \left(\frac{D_A}{D_B}\right)^2\right] = 2g \times 50$$

$$\left(\frac{\pi D_B \times 1300}{60}\right)^2 = \frac{2 \times 9.81 \times 50}{(1 - 0.5^2)}$$

$$\boxed{D_B = 53 \text{ cm}}$$

93. Activities A, B, C and D constitute a small project; their interrelationship, expected duration and standard deviation of this expected duration are shown in the figure, respectively.




With a view to improving the speed of implementation, each of B, C and D are split into three equal segments, maintaining appropriate inter-relationships between A and each of these nine segments. What will be the standard deviation of the modified project duration after segmentation (to the nearest $\frac{1}{10}$ unit)?

(a) 6·2 (b) 5·6

(c) 5·2 (d) 4·6

Ans. (b)

Sol.

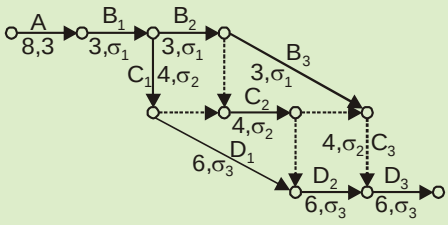

If activity B is divided into 3 equal parts then each part will have duration 3 units and standard deviation σ_1

where $4.5 = \sqrt{\frac{\sigma_1^2 + \sigma_1^2 + \sigma_1^2}{(3-1)}}$

$\Rightarrow \quad \sigma_1 = \sqrt{\frac{2}{3}} \times 4.5$

Similarly, S.D. of C_1, C_2, $C_3 = \sigma_2 = \sqrt{\frac{2}{3}} \times 3$ each

S.D. of D_1, D_2, $D_3 = \sigma_3 = \sqrt{\frac{2}{3}} \times 1.5$ each

Modified project duration

$= 8 + 3 + 4 + 6 + 6$

$= 33$ units

Modified project S.D.

$$= \sqrt{3^2 + \frac{2}{3} \times 4.5^2 + \frac{2}{3} \times 3^2 + \left(\frac{2}{3} \times 1.5^2\right) \times 3}$$

$= 5.7$

94. Which of the following is/are the main drawback(s) in adopting bar charts?

1. All the activities are shown as being independent of each other
2. The sequence of activities is not defined at all

3. It is difficult to judge whether an activity is completed or not

(a) 1 only (b) 2 only
(c) 3 only (d) 1, 2 and 3

Ans. (d)

Sol. Bar chart does not show intedependency of activities. Hence they seem to be independent of each other and their sequence is not shown.

Bar chart does not depeict review of project progress hence it is difficult to judge whether an activity is complete or not.

95. The purpose of work-break-down structure in project planning is mainly to

1. Facilitate and improve the decision-making on procurement of resources
2. Relate activities under particular trade specializations to help in organizing for project staff
3. Co-ordinate regarding milestone events across trade specializations to improve the synergy between the trades

(a) 1 and 2 only (b) 1 and 3 only
(c) 2 and 3 only (d) 1, 2 and 3

Ans. (d)

96. Which of the following statements is/are correct?

1. An activity is in between two node numbers, which need not be in an increasing order in the activity progress sequence.
2. The length of the arrow in a network has certain significance.
3. Concurrent acitvities are mutually independent and can possibly be taken up simultaneously.

(a) 1 only (b) 3 only
(c) 2 only (d) 1, 2 and 3

Ans (b)

Sol. Length of arrows in network diagram has no significance.

An activity lies between two nodes. Number of nodes increase as the activity progresses.

97. Which of the following statements are implicit in developing the critical path network?

1. Only one time estimate is required for any activity
2. Time only is the controlling factor at this stage
3. Time and cost both are controlling factors at this stage
4. Critical events may have positive, negative, or zero float

(a) 1 and 2 only (b) 1 and 3 only
(c) 1 and 4 only (d) 2 and 4 only

Sol. (b)

Ans. In CPM only one time estimate is given for each activity.

In CPM time and cost both are controlling factors.

Float is associated with activity hence 4^{th} statement is wrong.

98. In the crtical path method of project planning, free float can be

(a) Greater than independent float

(b) Greater than total float

(c) Less than independent float

(d) Equal to total float

Ans. (a)

Sol. In critical path method.

Total float = LFT – EFT = LST – EST

Free Float = $F_T - S_j$

Independent Float = $F_f - S_i$

$\therefore$ Free float will be greater then independent float.

$\therefore$ Free float will be less than total float.

99. Slack time in PERT analysis

(a) Can never be greater than zero

(b) Is always zero for critical actvities

(c) Can never be less than zero

(d) Is minimum for critical events

Ans. (d)

Sol. In PERT analysis slack time can be

(a) +ve i.e S > 0

(b) –ve i.e S < 0

(c) Zero i.e S = 0

But for critical events slack will be minimum or zero.

Slack is associated with events hence statements (b) is wrong

Note:- Generally for crtical activities slack will be zero, but it can be minimum also.

100. A small project consists of 3 actvities P, Q and R to be executed in that sequence. The relationship between time duration (in 'Units of tme-T) and corresponding total direct cost (C units) for each of the activities, for alternate mutually exclusive possible durations for each activity, are tabulated herewith:


P		Q		R	
T	C	T	C	T	C
8	250	6	340	8	400
9	235	7	320	10	375
10	225	8	295	12	350
11	215	9	275		

For a total duration of 25 units of time, the least total direct cost for the complete project will be

(a) 965 units (b) 950 units

(c) 940 units (d) 925 units

Ans. (d)



Sol.

T	C	T	C	T	C
8	250	6	340	8	400
9	235	7	320	10	375
10	225	8	295	12	350
11	215	9	275		

Normal project duration = 11+9+12 = 32 units

Normal project cost = 840 units

Crash P by 2 day.

Project duration = 30 units

Project cost = 860 units

Crash R by 4 days.

Project duration = 26 units

Project cost = 910 units

Crash P by 1 day.

Project duration = 25 units

Project cost = 925 units.

IES MASTER
Institute for Engineers (IES/GATE/PSUs)

Announces

NEW BATCH FOR

IES GATE PSUs

MECHANICAL & ELECTRICAL

IES master synonymous with quality of teaching, result producing ability, quality material and test series is launching Mechanical & Electrical Engineering Batch.

OFFERING **40%** DISCOUNT TO **1ST 100 STUDENTS**

Batches	Date of Start
Regular	20th June 2016
Genius Batch	16th June 2016
Weekend Batch	18th June 2016

PROGRAM FEATURES

1. In depth explanation beginning from basics, useful for fresher students.
2. Regular class room tests, discussion and online test on regular basis will help students in regular evaluation of one's performance & identifying areas needs to be worked upon.
3. Personal interaction & "whatsapp" support system will help students clear his doubts instantly.
4. Comprehensive study materials with sufficient practice questions will help students restrict himself to material provided so that no time is wasted in working upon other Books.
5. Free demo for 5-days with 100% fee refund policy within 5-days.
6. To start with, we are offering 40% discount to 1st 100 students.

Admission Open for Session (2016-17), Apply Now

For Details, call at **8010009955, 011-41013406, 9711853908**
F-126, Katwaria Sarai, New Delhi - 110 016.

Web: www.iesmaster.org
E-mail: ies_master@yahoo.co.in | info@iesmaster.org

Directions: Each of the next **twenty (20)** items consists of two statements, one labelled as the 'statement (I)' and the other as 'statement (II)'. examine these two statements carefully and select the answers to thse items using the codes given below:

Codes:

(a) Both statement (I) and statement (II) are individually true and statement (II) is the correct explanation of statement (I)

(b) Both statement (I) and statement (II) are individally true but statement (II) is not the correct eplanation of statement (I)

(c) Statement (I) is true but statement (II) is false

(d) Statement (I) is false but statement (II) is true.

101. **Statement (I):** Splitting of fibres is a type of seasoning defect in wood.

Statement (II): Seasoning of timber is a general requirement for structural purposes.

Ans. **(b)**

Sol. Spliting is separation of fibers along the grain and extends from one end of the blank to the other end it is due to seasoning defect.

Seasoning of timber is a general requirement for structural purpose because it helps in

1. Reducing tendency to sphit warp and shrink.
2. Immune from attack by insects.
3. Increasing strength durability, workability and resilience.
4. Reduce weight and minimize cost of transportation.
5. Readily burning of timber, if used as fuel.

102. **Statement (I):** Hardwoods are used in special purpose heavy constrctions.

Statement (II): Hardwoods too are porous in nature.

Ans. **(b)**

Sol. Hardwoods are used in special purpose heavy construction because they are strong in tension, compression and shear, strong along and across the grains.

All hardwoods have vessels (little pipelines) that are used in sap production. When the vessels are cut across the end grain, they are referred to as pores, thus hardwoods are known as "porous woods".

103. **Statement (I):** In general, bricks cannot be used in industrial foundations.

Statement (II): Heavy duty bricks can withstand higher temperatures.

Ans. **(b)**

104. **Statement (I):** In multistoried constructions, burnt clay perforated bricks are used to reduce the cost of construction.

Statement (II): Perforated bricks are economical and they also provide thermal insulation.

Ans. **(a)**

105. **Statement (I):** Positive displacement pumps can be used for pumping of ready-mixed concrete.

Statement (II): The coarse aggregate in the mix is unlikely to be crushed during positive displacement.

Ans. **(a)**

106. **Statement (I):** Fire resistance of plastering can be achieved by mixing surkhi to the cement mortar.

Statement (II): Insulation against sound and fire be achieved by adding sufficient water in-situ just before applying the mortar.

Ans. **(c)**

107. **Statement (I):** Water containing less than 2000 ppm of dissolved solids can generally be used

satisfactorily for making concrete.

Statement (II): The presence of any of zinc, manganese, tin, copper or lead reduces the strength of concrete considerably.

Ans. (b)

108. **Statement (I):** Though a non-elastic material, yet concrete exhibits a linear relationship between stress and strain at low values of stress.

Statement (II): The modulus of elasticity of concrete is dependent on the elastic properties of aggregate and on curing.

Ans. (b)

109. **Statement (I):** Finer the cement, greater is the need for water for hydration and workability.

Statement (II): Bleeding of a mix occurs due to low water-cement ratio.

Ans. (c)

110. **Statement (I):** The failure of a mild steel specimen of circular cross-section, subjected to a torque occurs along its cross-section.

Statement (II): The failure occurs on a plane of the specimen subjected to maximum shear stress; and mild steel is relatively weak in shear.

Ans. (a)

111. **Statement (I):** In elastic analysis of structures, the neutral axis is the intersection between the plane of bending and the neutral plane.

Statement (II): Neutral axis in the context of plastic analysis of structures is always the Equal area axis of the cross-section.

Ans. (d)

112. **Statement (I):** Whereas shutter vibrators are preferred for use with pre-stressed beams, needle vibrators are preferred in foundation concreting.

Statement (II): Needle vibrators are susceptible to get dysfunctional with leaking-in of cement slurry – which is not the case with the shutter vibrator.

Ans. (b)

113. **Statement (I):** The forward edge of wheels or outriggers acts as a fulcrum in determining the lifting capacity of a mobile crane.

Statement (II): There is in-build security and safety against sudden dropping of load, as well as against abrupt swinging, in the working of a mobile crane.

Ans. (b)

Sol. The stability-limited rated load for a mobile crane supported on outriggers is 85% of tipping load.

$\because$ Tipping takes about fulcrum.

114. **Statement (I):** Hand-operated chain-hoists include differential screw-geared types within their range.

Statement (II): In case of a hoist-winch, the capacity of the hoist is increased by a number of gear reductions.

Ans. (b)

Sol. Hand operated chain hoist are screw geared and differential type i.e., they are self locking and will automatically hold a load in position.

Winch is used for pulling and hoisting objects, lower is the gear ratio higher is the power.

115. **Statement (I):** When employing weigh-batching for mix preparation, bulking of sand has to be accounted for.

Statement (II): Bulked sand will affect the proportional composition of the ingredients to be used in making wet concrete of the desired eventual strength.

Ans. (d)

116. Statement (I): Critical path(s) through a CPM network can be identified even without working out the backward pass computations by a competent user.

Statement (II): Critical path is the progressive chain of activities from start to finish (not excluding between splitting and merging nodes) through the network where total float is absent throughout (including through dummy arrrows, if appropriate).

Ans. (b)

Sol. Critical path is the longest path time wise which canbe determined from forward path method only

117. Statement (I): For implementing weigh-batching, separate compartments are made for storing large quantities of the aggregates. Besided lifting and loading equipments, there must be regular assessment of grading and also of moisture content.

Statement (II): Whereas eventual strength of the mix depends also on the grading of the ingredients, the water needs too must be properly computed and implemented.

Ans. (b)

118. Statement (I): Resources optimization is largely a pre-implementation pursuit whereas resources allocation is a through-implementation dynamic process.

Statement (II): Resources allocation has a larger bearing on inventory management than resoures optimization.

Ans. (b)

119. Statement (I): Crashing of project duration always increases the cost of the project on its completion, no matter what the indirect, or overhead, costs are.

Statement (II): The critical path along the project activities network diagram is compressed in the process of investigating the crashing of the project duration, and not the non-critical activities, up to a certain stage of crashing.

Ans. (d)

120. Statement (I): In the operation of reciprocating pumps, slip can sometimes be negative.

Statement (II): Under conditions of high speed, long suction pipes (without cavitation) and short delivery pipes, inertia pressure can be relatively rather high, causing the delivery value to open before the discharge stroke begins.

Ans. (a)

IES MASTER

Institute for Engineers (IES/GATE/PSUs)

OUR TOP RESULTS IN ESE-2015











and Many More.....

OUR TOP RESULTS IN ESE-2014





OUR TOP RESULTS IN ESE-2013



and Many More.....

OUR TOP RESULTS IN ESE-2012



and Many More.....

If found any discrepancy please bring it to our notice.