

: HEINE Hand-held Ophthalmic Instruments





[ C-01.14.602 ]

#### The ideal portable addition to a static full-size slit lamp.

HSL150 features bright, white XHL Xenon Halogen illumination comparable in intensity with the best static slit lamps for examination of the anterior segment. The compact, ergonomic design provides instant loupe alignment of the slit image for comfortable operation.

HSL150 provides a 10 mm x 0,2 mm up to 14mm x 4mm slit image for direct focal illumination with an optical section.

The ideal alternative for examinations where a static slit lamp is not available or practical to use. This hand-held slit lamp is invaluable for screening, in accident and emergency rooms, and for bed-ridden patients or small children.

- : Magnified view with 20-Diopter loupe.
- Instant selection of interference cobalt blue filter (FITC) for corneal examination.
- Instant selection of loupe position for optimal alignment with slit.
- Advanced multi-coated optics maximize light transmission and reduce reflexes.
- Full metal construction assures perfect optical alignment and will provide a lifetime of reliable performance.
- HEINE 2.5 V or 3.5 V XHL® Xenon Halogen Technology provides a bright, white light for true full-size slit lamp brightness.
- : Continuously adjustable brightness control.
- Compact design for complete portability and ease of use.
- 100% dustproof construction, for a lifetime of maintenance-free performance.
- The HSL150 instrument head weighs only 70g, the lightest portable Slit lamp available.
- : 6x magnification.



HEINE HSI 150° Hand-held Slit Lamp with HEINE BETA SLIM® handle

#### Typical applications include:

- : Corneal examination for foreign bodies or ocular trauma.
- Corneal examination with fluorescein using the precision interference cobalt blue filter
- : General examination of the anterior segment, iris and crystalline.
- Primary diagnosis of patients with eye infections.
- Examination of elderly and bed-ridden patients.
- Contact lens work.
- : Industrial medicine.

## [ HEINE HSL 10 x® LOUPE ATTACHMENT ]

ORDER NO [LOUPE ATTACHMENT]: [C-00.14.606]

#### Loupe attachment with 10x magnification for HSL 150.

With precision magnification optics for crisp, clear images.

- 10x magnification when combined with HSL150 Loupe.
- Increased working distance from examiner to patient.
- Large field of view.
- With an additional detachable TP-elastomer Eyepiece to steady the instrument on the brow and avoid stray light. Can be replaced with a soft TP-elastomer cap, suitable for spectacle-wearers.



: HEINE LAMBDA 100® Retinometer Unique design.



# [ HEINE LAMBDA 100® RETINOMETER ]

ORDER NO [ HEAD ONLY ] : 3.5V [ C-02.35.015 ]\*

2.5V [ C-01.35.015]\*

3.5 V [ C-02.35.010 ]\*\*

2.5V [ C-01.35.010 ]\*\*

 $^{\star}$  with acuity scale 20/300 to 20/25 (scale 2)

\*\* with acuity scale 0.06 to 0.8 (decimal scale 1)

assessing potential visual acuity of patients with cataracts and other opacities. LAMBDA 100 - clinically tested

The first compact instrument for

with excellent results.

- : Simple, easy-to-use controls. Reliable diagnosis, easy to operate.
- The instrument fits onto battery- or rechargeable handles. Complete mobility - no dependence on the slit lamp.
- : Compact, lightweight (100g). Can be used anywhere - even bedside.
- HEINE XHL® Xenon Halogen Technology and brightness control. Avoids patient discomfort from dazzle.
- Includes explanatory card for patient instruction.



Examples of various acuity grating patterns (visual angle 1')



Visus =  $0.5\left(\frac{20}{40}\right)$ 





### Three simple steps to potential acuity assessment with LAMBDA 100.

- Switch on instrument, select acuity, select grating angle, reduce ambient lighting.

  Rest Retinometer against the patient's forehead. Scan the pupil with the red light spot to find a "window" through which the patient can recognize the grating pattern and identify its angle.

  Select progressively-finer grating patterns with different angles until the patient can no longer recognize the angle.
- The value of the last recognizeable angle indicates potential acuity.







: HEINE BETA 200 S® Ophthalmoscope
Perfection in detail.



[ C-01.30.120 ]

#### Superior aspherical optics.

The BETA 200 S is the first hand-held direct ophthalmoscope with a combination of patented aspherical optics 1) and single-step diopter selection from -36D to +38D for precise lens selection and a crisp, focused fundus image in all diagnostic situations.

HEINE's aspherical optical system uses the Gullstrand principle to separate the illumination and observation beams. Corneal and iris reflexes are avoided and a complete section of the retina is visible even with a small pupil.

7 apertures for diagnostic flexibility in both large and small pupils.

1) U.S. Pat. 4.963.014

- Aspherical optics avoid corneal and iris reflex.
- 74 single-diopter steps (from -36 to +38 dpt) for perfect focus even with high refractive error.
- The optics are mounted on a metal frame to ensure a lifetime of optical precision.
- 7 different apertures for retinal examination with both large and small pupils.
- Separate interference red-free filter for improved contrast when viewing retinal blood-vessels.
- A powerful HEINE XHL® Xenon Halogen bulb for full illumination with bright, white
- Dustproof and maintenance-free for the life of the instrument.
- The ergonomic rounded shape fits the orbita comfortably. Ergonomic, one-handed operation.
- The multi-coated, recessed eyepiece avoids stray light during the examination.
- The soft brow rest steadies the instrument and protects the examiners glasses.



#### **Apertures**

#### Patented "Aspherical Optical System" (AOS) exclusively from HEINE

reduces corneal and iris reflexes to provide large, crisp and glare-free fundus images.



[ 01 ] Cobalt blue filter



[ 02 ] Fixation star with polar co-ordinates



[ 03 ]



Large aperture

Medium aperture

[ 04 ]

[ 05 ] Macula aperture / MicroSpot




[ 06 ] Slit aperture



[ 07 ] Hemispot

- [ A ] without red-free filter
- [B] with red-free filter

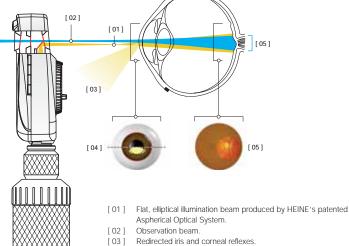

- The elliptical light beam enters through the lower half of the cornea. The illumination beam has been separated from the observation beam (Gullstrand-Principle). All reflexes are diverted away from the observation beam due to the curvature of the reflective cornea
  - Due to the flat, compressed form of the light beam, a maximum amount of light enters through the pupil.
- Once past the anterior chamber, the light beam opens up dramatically to illuminate a large area of the retina.

# : HEINE BETA 200® Retinoscope A new benchmark.



# [ HEINE BETA 200® RETINOSCOPE

# HEINE ParaStop® for total precision in selecting a parallel beam.

The BETA 200 Retinoscope with ParaStop<sup>1)</sup> and the latest in multi-coated optics provides an exceptionally-bright fundus reflex for improved accuracy of diagnosis.

ParaStop was designed and developed to simplify precise selection of a parallel illumination beam. ParaStop helps to determine the cylinder axis more precisely and speeds up subsequent testing after refraction.

The internal polarisation filter in the BETA 200 eliminates stray light and internal reflex without reducing brightness.

1) U.S. Pat. 5.859.687

 ParaStop simplifies precise selection of a parallel beam.

- Multi-coated optics ensure bright, clear images.
- : The internal polarisation filter eliminates stray light and internal reflex.
- : A single control sleeve adjusts vergence of the beam and provides streak rotation.
- The powerful, bright HEINE XHL® Xenon Halogen bulb ensures easy recognition of neutralisation.
- Can be changed from a streak to a spot retinoscope by simply changing the bulb.
- Instrument controls are made of metal to guarantee lifelong precision and quality of operation.
- : Improved ergonomic shape effectively shields the examiner's orbit from stray light.
- :- Totally-dustproof, maintenance-free.
- : Optional detachable orange filter for light-sensitive patients.
- Optional holder for fixation cards available.
- : Includes detachable brow-rest for spectacle wearers.

2.5V [C-01.15.353]\*
3.5V [C-02.15.363]\*\*
2.5V [C-01.15.363]\*\*


\*\* Spot Retinoscope


ORDER NO [ HEAD ONLY ] : 3.5 V [ C-02.15.353 ]\*



# ParaStop and polarisation filter

- [ 01 ] Polarisation filter, eliminates internal reflexes and stray light.
- [ 02 ] Semi-reflector mirror: Simultaneous illumination and observation. Reflected light from the retina enters the examiner's eye.
- [03] Condensor lens adjustable by a single control sleeve: Produces a divergent, convergent or parallel beam of light.
- [ 04 ] A special retinoscope bulb rotates for diagnosis of the cylinder axis.
- [ 05 ] ParaStop simplifies and speeds up the precise detection of cylinder axis.

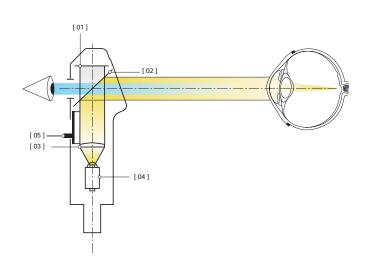



## HSL150 Hand-held Slit Lamp

113E 130 Halid-field Sift Earlip		
for BETA or BETA SLIM handles	2.5 V	3.5 V
HSL150, without handle	C-01.14.602	C-02.14.602
XHL Xenon Halogen spare bulb	X-01.88.098	X-02.88.099
Replacement filter attachment for HSL150		C-00.14.605
HSL 10x Loupe Attachment for HSL150		C-00.14.606
Set complete with HSL 150 and BETA SLIM handle		
<pre>(slim, compact), with:</pre>	2.5 V	3.5 V
BETA SLIM battery handle, in soft pouch, without spare bulb		
same, with HSL10x Loupe Attachment, spare bulb, in hard case	C-268.10.105	
BETA SLIM rechargeable handle and NT 200 charger, spare bulb, in hard case		C-266.20.470
same, with HSL10x Loupe Attachment, in hard case		C-268.20.470
Set complete with HSL 150, BETA handle (standard size) and spare bulb in hard case, with:	2.5 V	3.5 V
BETA battery handle	C-265.10.118	
same, with HSL10x Loupe Attachment	C-267.10.118	
BETA R rechargeable handle		C-265.20.376
same, with Lithium-lon battery		C-265.27.376*
BETA R rechargeable handle with HSL10x Loupe Attachment		C-267.20.376
same, with Lithium-lon battery		C-267.27.376
BETA TR rechargeable handle and transformer	_	C-265.20.384
same, with Lithium-lon battery		C-265.27.384*
BETA TR rechargeable handle and transformer with HSL10x Loupe Attachment		C-267.20.384
same, with Lithium-lon battery	_ ,	C-267.27.384
BETA NT rechargeable handle and NT 200 charger		C-265.20.420
same, with Lithium-Ion battery		C-265.27.420*
BETA NT rechargeable handle and NT 200 charger with HSL10x Loupe Attachment		C-267.20.420
same, with Lithium-Ion battery		C-267.27.420

\*Price on request.



LAMBDA 100 Retinometer	2.5 V	3.5 V
LAMBDA 100 Retinometer head with acuity scale 20/300 to 20/25 (scale 2), without handle	C-01.35.015	C-02.35.015
LAMBDA 100 Retinometer head with acuity scale 0.06 to 0.8 (decimal scale 1), without handle	C-01.35.010	C-02.35.010
XHL Xenon Halogen spare bulb	X-01.88.077	X-02.88.078
Patient card (for patient instruction prior to examination)		C-00.35.005
Set complete with LAMBDA100 Retinometer, acuity scale 0.06 to 0.8		
(decimal scale 1), patient card and spare bulb in hard case, with:	2.5 V	3.5 V
BETA battery handle	C-187.10.118	
BETA R rechargeable handle		C-187.20.376
same, with Lithium-lon battery		C-187.27.376
BETA TR rechargeable handle and transformer		C-187.20.384
same, with Lithium-lon battery		C-187.27.384
BETA NT rechargeable handle and NT 200 charger		C-187.20.420
same, with Lithium-lon battery		C-187.27.420
Set complete with LAMBDA100 Retinometer, acuity scale 20/300 to 20/25		
(scale 2), patient card and spare bulb for each instrument in hard case, with:	2.5 V	3.5 V
BETA battery handle	C-189.10.118	
BETA R rechargeable handle		C-189.20.376
same, with Lithium-lon battery		C-189.27.376
BETA TR rechargeable handle and transformer		C-189.20.384
same, with Lithium-lon battery		C-189.27.384
BETA NT rechargeable handle and NT 200 charger		C-189.20.420
same, with Lithium-lon battery		C-189.27.420



BETA 200 S Ophthalmoscope	2.5 V	3.5 V
BETA 200 S Ophthalmoscope, without handle	C-01.30.120	C-02.30.120
XHL Xenon Halogen spare bulb	X-01.88.069	X-02.88.070
Set complete with BETA 200S Ophthalmoscope, 1 spare bulb in hard case, with:	2.5 V	3.5 V
BETA battery handle	C-261.10.118	
BETA R rechargeable handle		C-261.20.376
same, with Lithium-lon battery		C-261.27.376
BETA TR rechargeable handle and transformer		C-261.20.384
same, with Lithium-lon battery		C-261.27.384
BETA NT rechargeable handle and NT 200 charger		C-261.20.420
same, with Lithium-lon battery		C-261.27.420



2.5 V	3.5 V
C-01.15.353	C-02.15.353
X-01.88.087	X-02.88.089
C-01.15.363	C-02.15.363
X-01.88.088	X-02.88.090
	C-00.15.355
	C-00.15.356
	C-00.15.357
	C-00.15.359
	C-00.15.360
2.5V	3.5 V
	C-34.20.376
	C-34.27.376
	C-34.20.384
	C-34.27.384
	C-34.20.420
	C-34.27.420
2.5 V	3.5 V
C-76.10.118*	
	C-76.20.376
	C-76.27.376
	C-76.20.384
	C-76.27.384
	C-76.20.420
	C-76.27.420
	C-01.15.353 X-01.88.087 C-01.15.363 X-01.88.088 2.5 V C-34.10.118*

 $<sup>^{\</sup>star} \text{ Available with large battery handle } \textbf{X-01.99.120} \text{ (doesn't fit into hard cases)}. \text{ Please specify with your order.}$ 





Set complete with BETA 2005 Ophthalmoscope, BETA 200 Streak Retinoscope,		
detachable brow rest, 1 spare bulb in hard case, with:	2.5 V	3.5 V
BETA battery handle	C-262.10.118	
BETA R rechargeable handle		C-262.20.376
same, with Lithium-Ion battery		C-262.27.376
BETA TR rechargeable handle and transformer		C-262.20.384
same, with Lithium-Ion battery		C-262.27.384
BETA NT rechargeable handle and NT 200 charger		C-262.20.420
same, with Lithium-Ion battery		C-262.27.420

# HEINE QUALITY

A company makes history and gives a name to outstanding product quality: HEINE. Founded in 1946, family owned, rich in tradition and today international market leader in a complete range of diagnostic instruments. HEINE products meet all international standards (ISO/CE) and represent the leading edge in precision and ergonomic design. Ongoing dedication to research and development has created a solid and diverse technology base for continued quality and product leadership. Over 500 employees worldwide contribute to this success.



We reserve the right to change specification without notice.

Your distributor

#### HEINE