


WIRING DIAGRAM FOR SUSI ADAPTERS MODEL # SWDGX9-SK & SWDGXR9-SK FOR SHARK/EPM 6000 METER IN GE CASE WITH POWER CONNECTED

SERVICE: WYE, 4-WIRE WITH 3 PTs AND 3 CTs

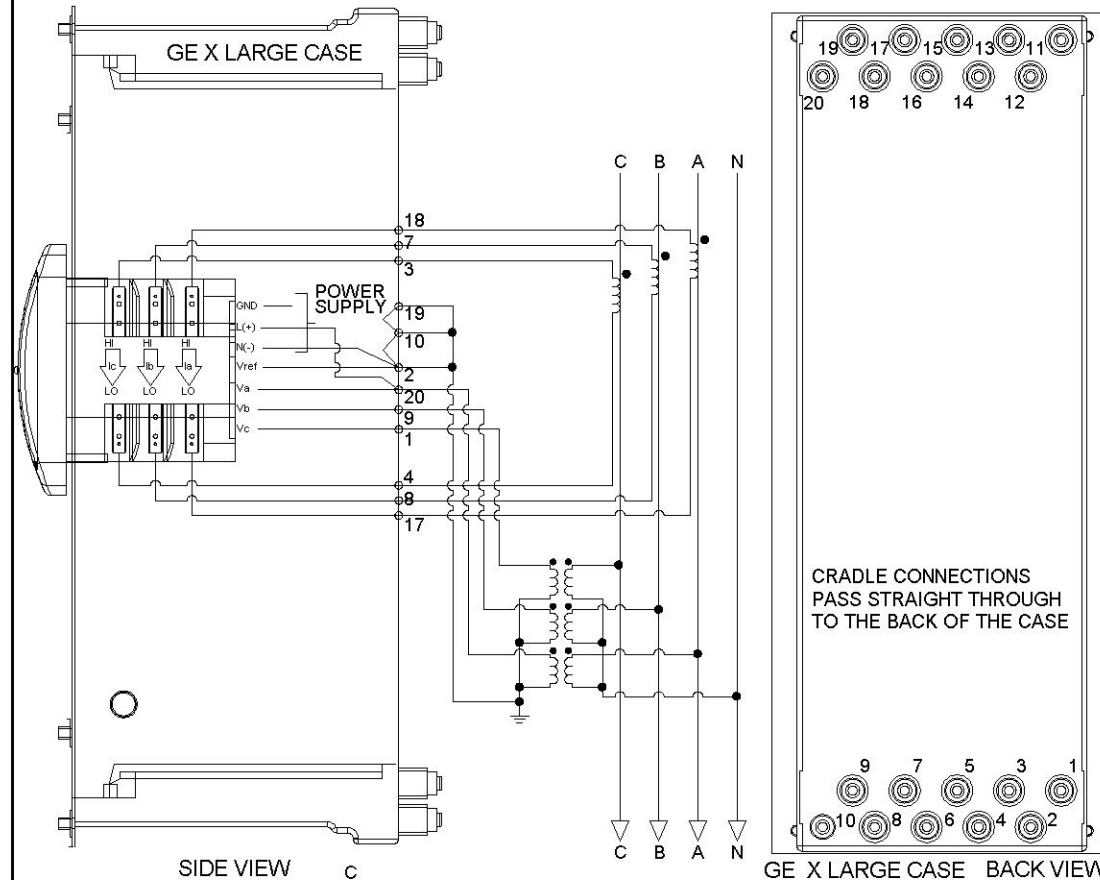

NOTES:

1. SELECT "3 EL WYE" (3 ELEMENT WYE) IN METER PROGRAMMING SETUP.
2. CONNECT GND DURING INSTALLATION AS DESIRED.

B	4/30/2013	MS			Updated Address and Title
A	7/09/09	CM			INITIAL RELEASE
REV	DATE	BY	CHK	APVD	REVISION DESCRIPTION
INFORMATION ON THIS DRAWING IS THE SOLE PROPERTY OF SUSI ADAPTERS. DO NOT COPY OR DISTRIBUTE WITHOUT WRITTEN PERMISSION FROM SUSI ADAPTERS. INTERPRET PER ANSI Y14.5 DO NOT SCALE DRAWING! ALL DIMENSIONS IN INCHES UNLESS NOTED OTHERWISE TOLERANCES SHALL BE: XXX = ± .005 X = ± .05 XX = ± .015 ANGLES: ± 0°5'					
DWN: RLH DATE: 7/09/09 CHK: ENGR:				SUSI ADAPTERS 9580 Red Bird Lane Johns Creek, GA 30022 PH: 770-448-6810 www.SUSIadapters.com	
TITLE: SWDGX9-SK SHARK/EPM 6000 METER WIRING				DWG. NO. 610-1510-05	REV: B
SHEET OF 1				SCALE: 0.4" = 1"	DWG SIZE: B