



PAL16-P-XX

SPECIFICATION

- Made of solid brass
 - Ceramic Cartridge
 - Hot Cartridge: CAR-HT-SO-8H-01
 - Cold Cartridge: CAR-HT-SO-8C-01
 - 1/2" male connection
 - Flow rate 4,5L/min. [1.2 gpm] @60psi
 - Universal drain included
 - Limited lifetime warranty
- * 1gpm & 0.5 gpm are available.

WARRANTY

Products covered by a full limited lifetime warranty against all manufacturing defects.

For more information about the product, or before proceeding to any installation please consult the installation manual.


SPÉCIFICATION

- Fabriqué de laiton massif
 - Cartouche en céramique
 - Cartouche chaud: CAR-HT-SO-8H-01
 - Cartouche froid: CAR-HT-SO-8C-01
 - Connexion 1/2" Male
 - Débit: 4,5L/min [1.2 gpm] @60psi
 - Drain universelle inclus
 - Garantie à vie limitée
- *1 gpm et 0,5 gpm sont disponibles.

WARRANTY

Products covered by a full limited lifetime warranty against all manufacturing defects.

For more information about the product, or before proceeding to any installation please consult the installation manual.

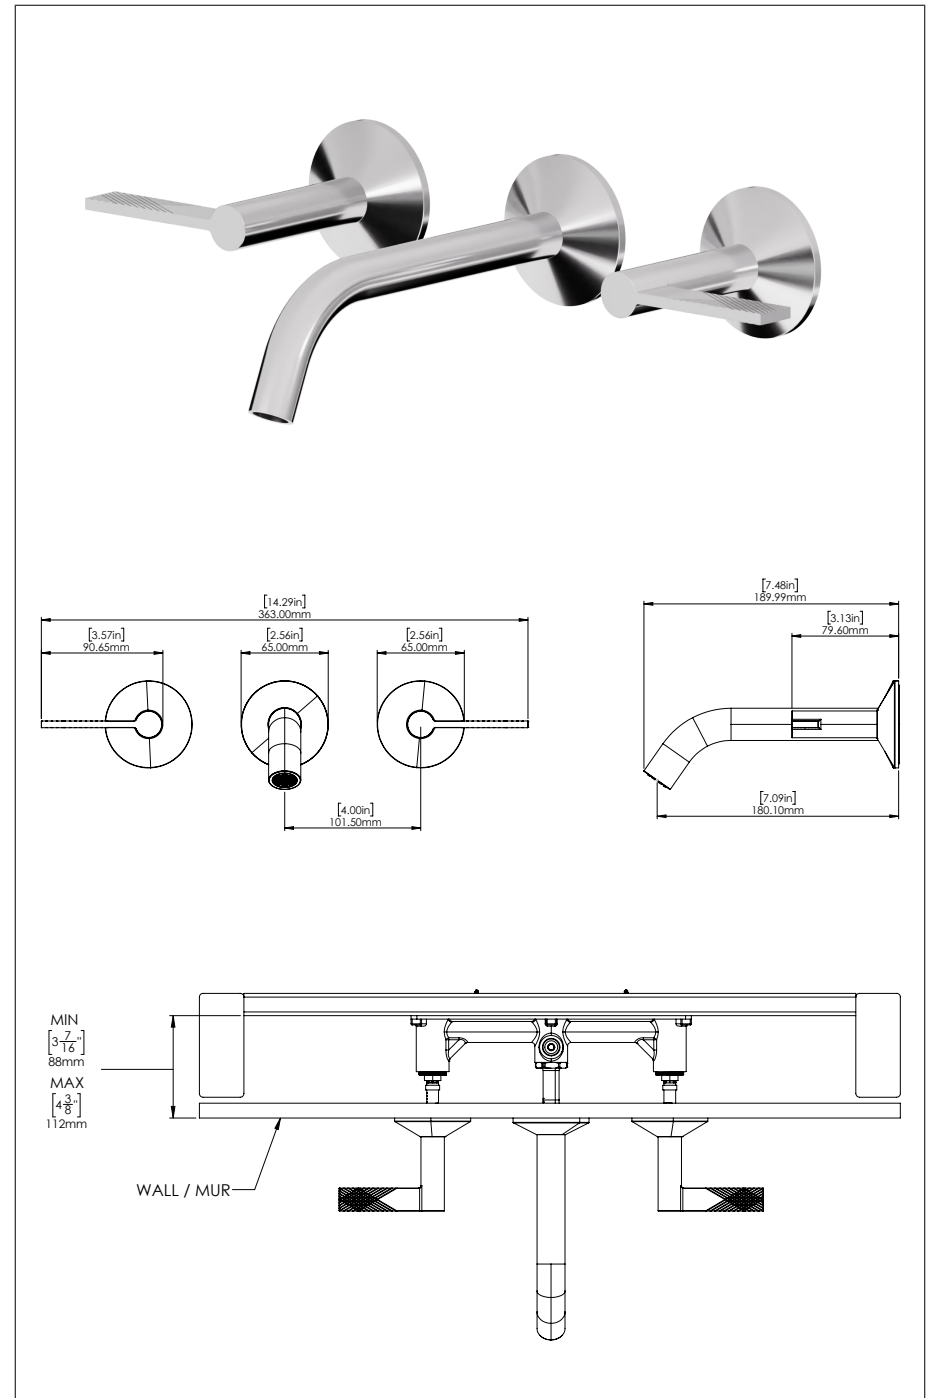

The product may vary slightly from its dimension and appearance.
Les dimensions et l'aspect du produit peuvent varier légèrement de l'illustration