

Water Softener

1" Porting, High-Efficiency, WiFi Monitoring

The 189UF with Aqua Alert® combines high-efficiency water softening with the ability to monitor and control your softener from your phone. Third-party certified to provide luxuriously soft water, enjoy advanced features while using less salt and water.

KEY FEATURES

AQUA ALERT®: Enjoy full control from the convenience of your phone with smart features like salt refill reminders, leak alert, and salt and water tracking. Optional leak alarm and remote water shut off give you complete control and peace of mind.

UPFLOW REGENERATION: Saves salt by preserving the unused portion of the softening bed from unnecessary ion exchange.

PRECISION BRINING: Calculates the exact amount of brine required to regenerate, using up to 30% less salt.

AUTOMATIC SYSTEM REFRESH: If no water is used for seven (7) days, the system will perform an automatic refresh to prevent bacteria growth.

BACKWASH FREQUENCY PRESET: Save up to 2,000 gallons of water per year by skipping up to ten (10) backwash cycles on clean municipal water supply.

SOFT WATER BRINE TANK REFILL: Keeps tank & injectors clean.

SOFT WATER RECHARGE: If capacity goes below 3%, an automatic 15-minute recharge restores softening until the next regeneration.

TANK FEATURES: Brine tank with safety float, air check and injection molded brine grid to reduce bridging. Moisture wicking neoprene tank jacket included with all pressure tanks.

VALVE FEATURES

TRUE 1" PORTING

For high-flow applications.

1" 90-DEGREE ELBOWS

Included for easy installation.

TIMESAIVING QUICK CONNECT FITTINGS & PRE-INSTALLED BYPASS

Quick connect fittings on bypass, drain line (10' included), brine line and power cord.

UNIQUE BYPASS DESIGN

Integrated turbine meter saves space, eliminates connections and is more durable.

OPTIONAL LEAK ALARM

A physical leak alarm placed near the floor drain will sound if a leak is detected. A Leak Alarm message will be sent to your phone and e-mail.

FOUR LINE TOUCH PAD

LCD DISPLAY No-touch rotating information display. Just set the time, date, and hardness.

48-HOUR PROGRAMMING MEMORY

Automatic programming restore for up to 48 hours during power loss.

AQUA ALERT® ENABLED

Ensures your system is performing properly with push notifications to your phone and e-mail.



CONTROL VALVE



PRESSURE TANK



AQUA ALERT®

AQUA ALERT®
LEAK ALERT / SALT SENSOR /
PERFORMANCE MONITORING



IAPMO R&T Certified to
NSF/ANSI 44, 372 and
CSA B483.1.



COMPONENT

Technical Specifications

QUICK LINKS



Homeowner's Manual



Installation Guide



Maintenance Guide



Trouble Shooting Guide



Parts Breakdown



Programming Guide



Warranty Sheet



Aqua Alert Manual

PROFESSIONALLY ENGINEERED FOR PERFORMANCE

MODEL NUMBER	WG189UF-100 WF	WG189UF-150 WF	WG189UF-200 WF	WG189UF-300* WF
Item Number	82492	82493	82494	82495
SYSTEM CAPACITY GRAINS				
@ 10 lbs / Cubic Feet	30,000	45,000	60,000	90,000
@ 6 lbs / Cubic Feet (Factory Setting)	25,000	37,500	50,000	75,000
@ 3 lbs / Cubic Feet	15,000	22,500	30,000	45,000
REGENERATION WATER USAGE (GALLONS)				
Clean Water (Factory Setting)	43.4 gal	62.7 gal	87.1 gal	139.2 gal
Problem Water	64.3 gal	90.3 gal	124.6 gal	196.2 gal
Resin Quantity (Cubic Feet)	1.0 ft ³	1.5 ft ³	2.0 ft ³	3.0 ft ³
Pressure Tank Size (Inches)	9 x 48	10 x 54	12 x 52	14 x 65
Media Loaded	Yes	Yes	Yes	No
Salt Storage Capacity	270 lbs	270 lbs	350 lbs	420 lbs
Flow Rate @ 15 psi Pressure Drop	11.0 US gpm	11.2 US gpm	12.2 US gpm	12.6 US gpm
Flow Rate @ 25 psi Pressure Drop	15.0 US gpm	15.1 US gpm	16.2 US gpm	16.6 US gpm
Backwash Flow Rate	2.0 US gpm	2.5 US gpm	3.5 US gpm	5.0 US gpm
Shipping Weight	102 lbs	134 lbs	169 lbs	279 lbs
Regeneration Type	UPFLOW (COUNTER CURRENT)			
Plumbing Connections	AQUAFINE® 8% CATION EXCHANGE RESIN			
Resin Type	AQUAFINE® 8% CATION EXCHANGE RESIN			
Electrical Requirements	INPUT 120V 60 Hz - OUTPUT 12V 650mA			
Water Temperature Limits	MIN 40° - MAX 110° F (4° - 43° C)			
Water Pressure Limits	MIN 30 - MAX 125 PSI (207 - 862 KPA)			


*DUE TO WEIGHT, THESE SYSTEMS COME UNLOADED. MEDIA COMES PREMEASURED. ALL ABOVE ASSEMBLED UNITS SUPPLIED WITH PRE-INSTALLED BYPASS WITH BRINE TANK SAFETY FLOAT AND AIR CHECK.

DIMENSIONS

WG189UF WF	100	150	200	300
TANK/VALVE A x B (inches)	56.25 x 9.0	62.25 x 10.0	60.5 x 12.0	74.25 x 14.0
BRINE TANK C x D (inches)	18.1 x 34.5	18.1 x 34.5	20.3 x 37.4	23.0 x 40.5

AQUA ALERT® WIFI Optional Accessories

ITEM NUMBER	DESCRIPTION
60010380	KIT, LEAK SENSOR & 1" ELECTRIC BALL VALVE
60010378	LEAK SENSOR, WIFI
60010379	1" ELECTRIC BALL VALVE, WIFI

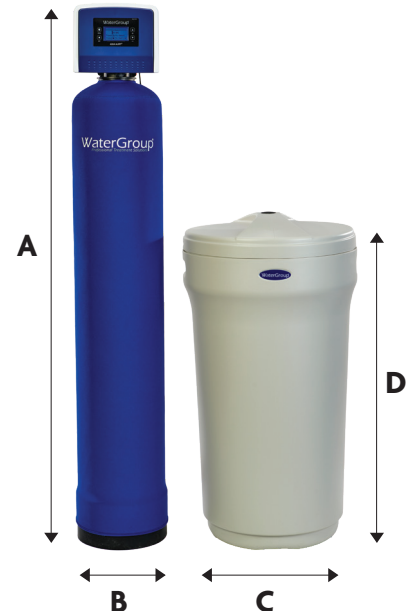

WaterGroup®
Professional Treatment Solutions

A DIVISION OF
Canature
WaterGroup

Water
Quality
Association

CWQA
Canadian Water Quality Association

ICPH
Canadian Institute of
Plumbing & Heating

PHCC
PLUMBING-HEATING-COOLING
CONTRACTORS ASSOCIATION
Best People. Best Practices.

Toll Free: 877-288-9888 | www.watergroup.com | Regina, SK • Cambridge, ON • Whitestown, IN • Houston, TX • Phoenix, AZ • Guadalajara, MX

DESIGNED, ENGINEERED & ASSEMBLED IN NORTH AMERICA

80155801 REV 1 2025-04-04 Download only