

Water Softener

Water Softener with 1" Porting and Iron & Manganese Removal

The 189DFSIM Series system offers a cost-effective and reliable solution for treating hard water and removing iron contamination. Third-party certified for iron removal, the SIM uses fine mesh ion exchange resin to remove clear water iron and manganese while softening water.

KEY FEATURES

MAXIMUM HARDNESS: Softens up to 75 grains per gallon of hardness.

MAXIMUM TOTAL IRON: Removes 10.0 ppm total iron in water with a pH below 7.2 and 7.0 ppm total iron in water with a pH above 7.2.

Total Iron Calculation = (Iron ppm x 1) + (Manganese ppm x 2).

MAXIMUM MANGANESE: 5.0 ppm (see total iron calculation).

TANK FEATURES: Brine tank with safety float, air check and injection molded brine grid to reduce bridging. Moisture wicking neoprene tank jacket included on all pressure tanks.

VALVE FEATURES

TRUE 1" PORTING

For high-flow applications.

1" 90-DEGREE ELBOWS

Included for easy installation.

TIMESAIVING QUICK CONNECT FITTINGS

Quick connect fittings on bypass, drain line (10' included), brine line and power cord. Bypass included.

UNIQUE BYPASS DESIGN

Integrated turbine meter saves space, eliminates connections and is more durable.

FOUR LINE TOUCH PAD

LCD DISPLAY No-touch rotating information display. Just set the time, date, and hardness.

48-HOUR PROGRAMMING MEMORY

Automatic programming restore for up to 48 hours during power loss.



CONTROL VALVE



PRESSURE TANK



INCLUDES PRO EASY FEEDER STARTER KIT



COMPONENT



IAPMO R&T Certified to NSF/ANSI 42, 372 and CSA B483.1.

Technical Specifications

QUICK LINKS



Homeowner's Manual



Installation Guide



Maintenance Guide



Trouble Shooting Guide



Parts Breakdown



Programming Guide



Warranty Sheet


PROFESSIONALLY ENGINEERED FOR PERFORMANCE

MODEL NUMBER	WG189DFSIM-100	WG189DFSIM-150	WG189DFSIM-200	WG189DFSIM-300
Item Number	82497	82498	82499	82500
FACTORY SETTINGS - IRON & MANGANESE				
Salt Used Per Regeneration	12.0 lbs	18.0 lbs	24.0 lbs	36.0 lbs
Water Used Per Regeneration	124.0 gal \pm 10%	215.0 gal \pm 10%	274.0 gal \pm 10%	278.0 gal \pm 10%
Hardness Removal (Grains)	30,000	45,000	60,000	90,000
Filter Media Volume - Cubic Feet	1.0 ft ³	1.5 ft ³	2.0 ft ³	3.0 ft ³
Garnet	Yes	Yes	Yes	Yes
Pressure Tank Size (Inches)	10 x 54	12 x 52	13 x 54	14 x 65
Media Loaded	Yes	Yes	No	No
Salt Storage Capacity	270 lbs	350 lbs	350 lbs	420 lbs
Flow Rate @ 15 psi Pressure Drop	11.0 US gpm	11.2 US gpm	12.2 US gpm	12.6 US gpm
Flow Rate @ 25 psi Pressure Drop	15.0 US gpm	15.1 US gpm	16.2 US gpm	16.6 US gpm
Backwash Flow Rate	2.4 US gpm	4.0 US gpm	5.0 US gpm	5.0 US gpm
Shipping Weight	120 lbs	161 lbs	214 lbs	300 lbs
Regeneration Type	DOWNFLOW (COCURRENT)			
Maximum Hardness	75 GRAINS PER GALLON			
Maximum Total Iron (Ferrous)	10.0 PPM TOTAL IRON FOR PH < 7.2			
Total Iron = (Iron ppm x 1) + (Manganese ppm x 2)	7.0 PPM TOTAL IRON FOR PH \geq 7.2			
Maximum Manganese (See Total Iron)	5.0 ppm			
Resin Type	AQUAFINE® FINE MESH ION EXCHANGE RESIN			
Plumbing Connections	INCLUDES 1" 90° NPT ELBOWS			
Electrical Requirements	INPUT 120V 60 Hz - OUTPUT 12V 650mA			
Water Temperature Limits	MIN 40° - MAX 110° F (4° - 43° C)			
Water Pressure Limits	MIN 30 - MAX 125 PSI (207 - 862 KPA)			

Above units supplied with easy feeder and 64oz bottle of Rescare.

DIMENSIONS

WG189DFSIM	100	150	200	300
TANK/VALVE A x B (inches)	62 x 10	60 x 12	62 x 13	74 x 14
BRINE TANK C x D (inches)	18.1 x 34.5	20.3 x 37.4	20.3 x 37.4	23.0 x 40.5

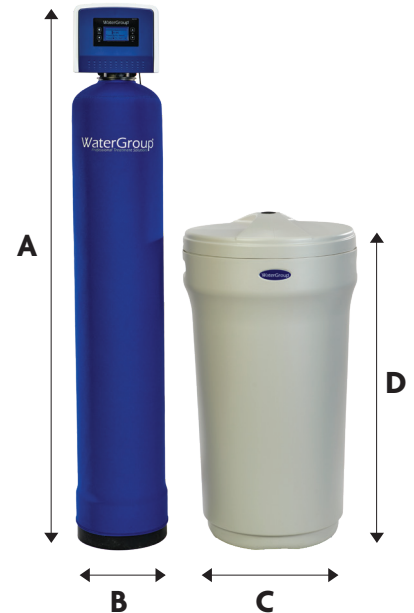

WaterGroup®
Professional Treatment Solutions

A DIVISION OF
Canature
WaterGroup

Water
Quality
Association

CWQA
Canadian Water Quality Association

CPHA
Canadian Institute
of Plumbing & Heating

PHCC
PLUMBING-HEATING-COOLING
CONTRACTORS ASSOCIATION
Best People. Best Practices.