

AQUA FLO®

Reverse Osmosis System


With the quality of our drinking water increasingly coming under question, people are now looking for alternative sources of quality water. Reverse Osmosis Drinking Water Systems provide the most convenient and economical solution.

Neatly stored under the counter, the Reverse Osmosis Drinking Water System provides you with clean and delicious water right from its own dedicated tap.



FEEL GREAT... HYDRATE!

- ◆ 75% of your body is water
- ◆ Mild dehydration can cause headaches, dizziness, fatigue, dry skin and joint pain
- ◆ 33% of caloric intake comes from sugary drinks
- ◆ Water has 0 calories and helps suppress hunger

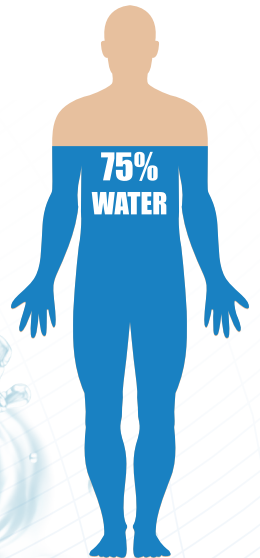

MORE CONVENIENCE AT A FRACTION OF THE COST!


- ◆ No lugging or storing heavy 40lb bottles, AquaFlo Solutions cost only pennies per litre.



- ◆ Perfect for drinking, cooking, juice, coffee, tea, ice cubes.



- ◆ Pets and plants love it too!




Features:

- ◆ The sediment filter screens out particulate material, such as dirt, sand, or rust, which may clog the other filters in the system.
- ◆ The activated carbon prefilter reduces chlorine which may damage the RO membrane filter.
- ◆ NSF Certified TFC 75 GPD reverse osmosis membrane provides up to 99% Total Dissolved Solids (TDS) rejection.
- ◆ The polishing filter adsorbs any residual tastes and odors just before the water is delivered through the faucet.
- ◆ Manual flush extends life of membrane.
- ◆ 3.2 Gallon NSF Certified plastic storage tank.
- ◆ 3/8" outlet tubing for higher flows.
- ◆ Automatic shut-off valve.
- ◆ Exclusive serviceable check valve eliminates spring 'chatter' noise common in other RO's.
- ◆ Quick connect fittings for ease of installation.
- ◆ Plastic bracket.
- ◆ Two separate wrenches for use on membrane cap and sump.

Model #	Part #	Stage 1	Stage 2 and 3	Stage 4	Stage 5	Storage Tank	Faucet
RO75	20010073	Sediment Filter	Activated Carbon Block Filter	Reverse Osmosis Membrane	Activated Carbon Polishing Filter	Plastic Tank - 3.2 Gallons	Standard Non-AirGap
RO75BP *	20010074					Plastic Tank - 3.2 Gallons	



Booster Pump Model: RO75BP



Booster Pump Model also includes:

- ◆ Pump mounted on RO to maintain constant water pressure to membrane.
- ◆ Raises water pressure to ideal level for maximum efficiency.
- ◆ Use on rural supplies with low pressure or high TDS.
- ◆ Self-priming and whisper quiet.
- ◆ 24VAC transformer (included) from a standard 120VAC electrical outlet.
- ◆ Flexible mounting plate, quick connect fittings and pressure shut-off switch.

FEED WATER GUIDELINES		
	RO75 Item #20010073	RO75BP Item #20010074
Maximum TDS	2,000 ppm/mg/l	2,500 ppm/mg/l
Feed Water Pressure	40 to 100 psi	30 to 70 psi
Maximum Hardness	7 GPG	
Maximum Iron	0.2 ppm/mg/l	
Maximum Manganese	0.05 ppm/mg/l	
Maximum Hydrogen Sulphide (H ₂ S)	0.00 ppm/mg/l	
Maximum Turbidity	1.0 NTU	
Temperature Range	40° to 100°F (4° to 38°C)	
pH Range	3.0 to 11.0	
Maximum Chlorine	2.0 ppm/mg/l	

NOTE: Feed water supply must be potable

Your Local Water Specialist

AQUA FLO®