



CONTROL
VALVE



PRESSURE
TANK



**USES UP TO 50%
LESS SALT & 28%
LESS WATER**



IAPMO R&T Certified to
NSF/ANSI 44, 372 and
CSA B483.1.

Water Softener

Reliable, Affordable, Compact Size

The Econo Flo cabinet softener is perfect for homeowners looking for a reliable water softener that saves space. Third-party certified to provide soft water throughout the home, the Econo Flo is known for its long-lasting performance.

KEY FEATURES

Outstanding Value: Simple electronics for the same price as mechanical metered units.

Essential Features: Adjustable cycle times and optional regeneration modes (meter immediate, meter delayed, meter override, calendar clock modes).

Reliable Performance: 5-year control valve and 10-year pressure tank warranty.

Tank Features: Brine tank with safety float, air check and injection molded brine grid to reduce bridging. Reliable, NSF certified pressure tank.

VALVE FEATURES


3/4" 90-Degree Elbows
Included for easy installation.

Simple Electronics
Just set time of day, hardness and number of people.

Optional Regeneration Modes
Meter immediate, meter delayed, meter override, calendar clock modes.

48-Hour Programming Memory Automatic programming restore for up to 48 hours during power loss.

Timesaving Quick Connect Fittings & Pre-Installed Bypass Quick connect fittings on bypass, drain line (10' included), brine line and power cord, for easier, faster installations.

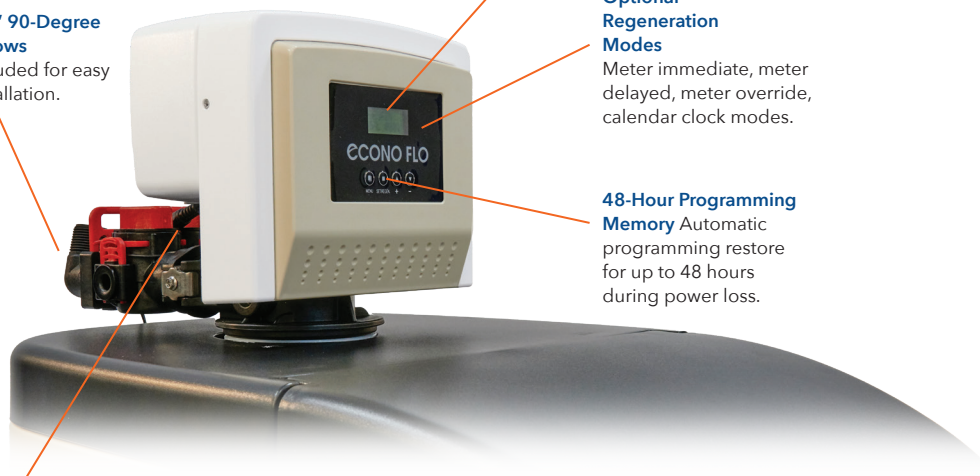

Technical Specifications

PROFESSIONALLY ENGINEERED FOR PERFORMANCE

MODEL NUMBER	EFC-100
Item Number	82118
CAPACITY (GRAINS)	
@ 10 lbs/Cubic Feet	26,500
@ 6 lbs/Cubic Feet Factory Setting	22,000
@ 3 lbs/Cubic Feet	14,000
Service Flow Rate	10.0 US gpm
Backwash Flow Rate	2.4 US gpm
Total Resin (Cubic Feet)	1.0 ft³
Salt Storage Capacity	225 lbs
Shipping Weight	110 lbs
Regeneration Type	DOWNFLOW (COCURRENT)
Plumbing Connections	INCLUDES 3/4" 90° NPT ELBOWS
Resin Type	AQUAFINE® 8% CATION EXCHANGE RESIN
Electrical Requirements	INPUT 120V 60 Hz - OUTPUT 12V 650mA
Water Temperature Limits	MIN 40° - MAX 110° F (4° - 43° C)
Water Pressure Limits	MIN 30 - MAX 125 PSI (207 - 862 KPA)

DIMENSIONS

EFC-100

13.8" X 23.6" X 34.5"



QUICK LINKS



Homeowner's Manual



Installation Guide



Maintenance Guide



Trouble Shooting Guide



Parts Breakdown



Programming Guide



Warranty Sheet

