

VicWallpaper VMT

PUBLIC SPACES / Hi-FI & HOME CINEMA / WORKSPACES



Description


VicWallpaper VMT is a revolutionary new way of acoustic and thermal isolation, for residential and commercial applications. This acoustic wallpaper was developed to perform over medium to high frequencies, is ideal for improving speech and intelligibility on places like meeting rooms, living rooms or classrooms.

Manufactured in recycled and fire created EuroClass B PET, VicWallpaper is easy and fast to install, not requiring any specialised and expensive labour.

Features

- Light weight
- Easy to Install
- Easy to clean and maintain
- High Performance in medium and high frequencies

Performance

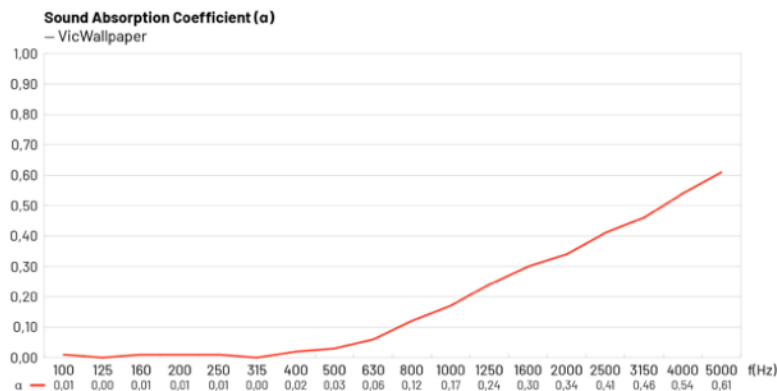

NRC: 0.20

Available Finishes*

Pattern Designs

- Deck
- Triangles
- Square 30
- Square 8
- Symmetric

Collection

- Concrete

Solid Color



* Different batches may show a color variation

Dimensions**

- a) 595 x 595 x 10 mm / 23.4" x 23.4" x 0.4"
- b) 595 x 1190 x 10 mm / 23.4" x 46.8" x 0.4"

** For each panel. Please notice that the dimensions of these panels have a tolerance of +/- 2mm

Packing Information

Units per box: 8

Box: a) 615 x 640 x 130 mm / 24.2" x 25.2" x 5.1"; b) 1245 x 615 x 130 mm / 49 x 24.2" x 1.2"

Box Gross Weight: a) 4,4 kg / b) 9,6 Kg

Technical Information

Material: VicPet Wool

Fire Rating:

- Europe: Euroclass C -s2, d0
- USA: Class A (ASTM-E84) ; Flame Spread: 0; Smoke Development: 170.

Installation: Flexi Glue Ultra, Double sided tape

Thermal Properties:

- White PET 40mm: Lambda-10: 37.12 mW/(m*K); R-10: 1.1449 m2K/W; TC: 0.1922 mW/(m*k2)W
- White PET 20mm: Lambda-10: 34.37 mW/(m*K); R-10: 0.6197 m2K/W; TC: 0.1558 mW/(m*k2)
- Black PET 40mm: Lambda-10: 33.78 mW/(m*K); R-10: 1.2404 m2K/W; TC: 0.1681 mW/(m*k2)
- Black PET 20mm: Lambda-10: 34.37 mW/(m*K); R-10: 0.6197 m2K/W; TC: 0.1558 mW/(m*k2)

Certificates:



More information:

vicoustic.com/product/vicwallpaper-vmt

V6-Jun.21