WESTGATE MFG Electrical Catalog no.30



INTRODUCTION

When you choose a manufacturer to fulfill your electrical and lighting needs, you generally make your decision based on quality, price and service. Our vision at Westgate Manufacturing was to provide the best quality product at the most competitive price, delivered with the most professional service in the industry.

Westgate Manufacturing offers 16 distinct lines of electrical and lighting products that deliver the highest level of quality and performance in the industry. We ship all orders received by noon that same day from our central warehouse facility located in the City of Commerce (Los Angeles) and all of our product is backed by our Westgate warranty. From weatherproof junction boxes to state-of-the-art LED lighting fixtures we're sure you will be satisfied with our Westgate quality, price and service.

In just seven short years, Westgate has grown from a fledgling manufacturer to an industry leader in the development and production of cutting-edge electrical and lighting products. We are confident that you will find the quality and selection of our products among the best in the business.

Please let the professional staff at Westgate Manufacturing provide you with the best quality products and services available. We are dedicated to improving your profitability and service levels, while reducing shipper errors, defectives and back orders. Please give us the opportunity to serve you.

Move up to Westgate Manufacturing.

E. Hadjyan President

WESTGATE MFG WWW.WESTGATEMFG.COM

TOLL FREE: 877-805-2252

FAX: 877-809-2252





Our products are sourced from factorers who build value in their products and services. WESTGATE supply chain management specialists and engineering teams forge relationships with our vendor partners to provide high-caliber, sellable products that meet total customer satisfaction. WESTGATE is dedicated to quality, accuracy and fine craftmanship at each and every point of production. We strive for perfection, set the standards and take an extra step in each production to provide quality that is definitely world-class.



Profit is the critical life blood of every business enterprise. Understanding our customers' requirements and disciplined distribution practices, we ensure that all of our business partners have exceptional profit opportunities. WESTGATE builds long term and mutually beneficial relationship with its customers by repaying their trust and investment with continuous earnings and growth in their business.



WESTGATE is the one-stop shop for electrical and lighting requirments. We supply the needs and meet the demands of the market and our clientele with products at competitive prices. We choose convenience without compromising quality so our customers get maximum benefits. Product availability, on-time delivery, order tracking, no minimum order requirement, low freight policies, integral sales people and responsive sales managers are all hallmarks of the WESTGATE business experience.



Customer satisfaction is our goal. We work with our customers in a close relationship to understand their requirements and to provide them with the personal attention and care that their businesses need. WESTGATE empowers its core group to provide excellent service exceeding far beyond your expectations.

INTEGRITY

WESTGATE endeavors to build a business environment that values integrity and passion for excellence. We take pride in our brands and the quality of our service. Our confidence and our success reflect the quality of our products and integrity of our work.

Doing business with WESTGATE can be one of the most rewarding partnerships in your business. Take the next step with us and open the gate of opportunities to your perfect business.

WWW.WESTGATEMFG.COM TOLL FREE: 877-805-2252 FAX: 877-809-2252 WESTGATE MFG



weatherproof products

Westgate's weatherproof products are UL listed and manufactured from high quality "copper free" aluminum alloy and are suitable for both exterior and interior applications. We offer a broad range of weatherproof boxes, extension rings, covers and devices to meet every contractor's outdoor needs.





- :: Dimensions: width 2-3/4", height 4-1/2", depth 2"
- :: Material: die-cast aluminum with powder-coated finish
- :: Available with 3, 4, or 5 reinforced threaded outlet holes
- :: Outlet hole sizes: available in 1/2" or 3/4" threaded outlet holes
- :: Color: gray (select items available in white*)

PRODUCT FEATURES:

- :: Scratch resistant powder-coated finish
- :: Suitable for wet locations NEMA 3R rated
- :: Reinforced connector outlets that accept threaded fittings & conduits
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Closure plugs, mounting lugs and ground screws included*
- :: "X" denotes boxes with side outlets

APPLICATIONS:

- :: Used for branch circuit wiring in wet, damp and dry locations
- :: For use as a weatherproof junction box or to install receptacles, switches and GFCI devices







FAX: 877-809-2252



ONE-GANG BOXES | 2" DEEP

W1B50-3

W1B75-3

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
W1B50-3	1/2"	3	18.3	GRAY	40
W1B50-3-WH*	1/2"	3	18.3	WHITE	40
W1B75-3	3/4"	3	18.3	GRAY	40
W1B75-3-WH*	3/4"	3	18.3	WHITE	40
W1B50-4	1/2"	4	18.3	GRAY	40
W1B75-4	3/4"	4	18.3	GRAY	40
W1B50-5	1/2"	5	18.3	GRAY	40
W1B50-5-WH*	1/2"	5	18.3	WHITE	40
W1B75-5	3/4"	5	18.3	GRAY	40
W1B75-5-WH*	3/4"	5	18.3	WHITE	40
W1B50-5X	1/2"	5	18.3	GRAY	40
W1B75-5X	3/4"	5	18.3	GRAY	40

*Available in white on selected items





Also available in white





- :: Dimensions: width 2-3/4", height 4-1/2", depth 2-5/8"
- :: Material: die-cast aluminum with powder-coated finish
- :: Available with 3, 4, or 5 reinforced threaded outlet holes
- :: Outlet hole sizes: available in ½", ¾" or 1" threaded outlet holes
- :: Color: gray

PRODUCT FEATURES:

- :: Reinforced connector outlets
- :: Scratch resistant powder-coated finish
- :: Suitable for wet locations NEMA 3R rated
- :: Reinforced connector outlets that accept threaded fittings & conduits
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Closure plugs, mounting lugs and ground screws included
- :: "X" denotes boxes with side outlets

APPLICATIONS:

- :: Used for branch circuit wiring in wet, damp and dry locations
- :: For use as a weatherproof junction box or to install receptacles, switches and GFCI devices









W1DB50-3

W1DB1000-3

W1DB75-3

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
W1DB50-3	1/2"	3	23.8	GRAY	40
W1DB75-3	3/4"	3	23.8	GRAY	40
W1DB100-3	1"	3	23.8	GRAY	40
W1DB50-4	1/2"	4	23.8	GRAY	40
W1DB75-4	3/4"	4	23.8	GRAY	40
W1DB50-5X	1/2"	5	23.8	GRAY	40
W1DB75-5X	3/4"	5	23.8	GRAY	40
W1DB100-5X	1"	5	23.8	GRAY	40





FAX: 877-809-2252



W2B75-3























- :: Dimensions: width 4-%6", height 4-1/2", depth 2"
- :: Material: die-cast aluminum with powder-coated finish
- :: Outlet holes: available with 3, 4, 5, 6, 7, or 9 outlet holes
- :: Hole size: available in 1/2" or 3/4" threaded outlet holes
- :: Color: gray

PRODUCT FEATURES:

- :: Reinforced connector outlets
- :: Scratch resistant powder-coated finish
- :: Suitable for wet locations NEMA 3R rated
- :: Connector outlets accept threaded fittings & conduit
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Closure plugs, mounting lugs and ground screws included
- :: "X" denotes boxes with side outlets

APPLICATIONS:

- :: Used for branch circuit wiring in wet, damp and dry locations
- :: For use as a weatherproof junction box or to install receptacles, switches and GFCI devices



TWO-GANG STANDARD BOXES | 2"

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
W2B50-3	1/2"	3	30.5	GRAY	40
W2B75-3	3/4"	3	30.5	GRAY	40
W2B50-4	1/2"	4	30.5	GRAY	40
W2B75-4	3/4"	4	30.5	GRAY	40
W2B50-5	1/2"	5	30.5	GRAY	40
W2B75-5	3/4"	5	30.5	GRAY	40
W2B50-5X	1/2"	5	30.5	GRAY	24
W2B75-5X	3/4"	5	30.5	GRAY	24
W2B50-6X	1/2"	6	30.5	GRAY	20
W2B75-6X	3/4"	6	30.5	GRAY	20
W2B50-7	1/2"	7	30.5	GRAY	40
W2B75-7	3/4"	7	30.5	GRAY	40
W2B50-7X	1/2"	7	30.5	GRAY	20
W2B75-7X	3/4"	7	30.5	GRAY	20
W2B50-9	1/2"	9	30.5	GRAY	24
W2B75-9	3/4"	9	30.5	GRAY	24













W2DB75-5 W2DB100-5



TECHNICAL SPECIFICATIONS:

- :: Dimensions: width 4-%", height 4-1/2", depth 2-5%"
- :: Material: die-cast aluminum with powder-coated finish
- :: Outlet holes: available with 5 or 7 outlets
- :: Hole sizes: available in ½", ¾", or 1" threaded outlet holes
- :: Color: gray

PRODUCT FEATURES:

- :: Reinforced connector outlets
- :: Scratch resistant powder-coated finish
- :: Suitable for wet locations NEMA 3R rated
- :: Connector outlets accept threaded fittings & conduit
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Closure plugs, mounting lugs and ground screws included
- :: "X" denotes boxes with side outlet

APPLICATIONS:

:: Used for branch circuit wiring in wet, damp and dry locations

FAX: 877-809-2252

:: For use as a weatherproof junction box or to install receptacles, switches and GFCI devices

Ref: **UL**File#: **E 2 0 4 2 5 9**

TWO-GANG DEEP BOXES | 2-5/8"

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
W2DB50-5	1/2"	5	40.3	GRAY	20
W2DB75-5	3/4"	5	40.3	GRAY	20
W2DB100-5	1"	5	40.3	GRAY	20
W2DB50-7X	1/2"	7	40.3	GRAY	20
W2DB75-7X	3/4"	7	40.3	GRAY	20
W2DB100-7X	1"	7	40.3	GRAY	20









- :: Dimensions: width 6-3/8", height 4-1/2", depth 2-5/8"
- :: Material: die-cast aluminum with powder-coated finish
- :: Outlet holes: available with 7 outlets
- :: Hole sizes: available in 1/2", 3/4" or 1" threaded outlet holes
- :: Color: gray

PRODUCT FEATURES:

- :: Reinforced connector outlets
- :: Scratch resistant powder-coated finish
- :: Suitable for wet locations NEMA 3R rated
- :: Connector outlets accept threaded fittings & conduits
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Closure plugs, mounting lugs and ground screws included

APPLICATIONS:

- :: Used for branch circuit wiring in wet, damp and dry locations
- :: Use as a weatherproof junction box or to install receptacles, switches and GFCI devices





THREE-GANG DEEP BOXES | 2-5/8" DEEP

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
W3DB50-7	1/2"	7	54.0	GRAY	10
W3DB75-7	3/4"	7	54.0	GRAY	10
W3DB100-7	1"	7	54.0	GRAY	10













:: Dimensions:

width 2-¾", height 4-%6", depth1-¾" width 2-¾", height 4-%6", depth 1-%6"- flanged extension box

- :: Material: die-cast aluminum with powder-coated finish
- :: Outlet holes: available with 4 or 6 outlets
- :: Hole size: available in 1/2" or 3/4" threaded outlet holes
- :: Color: gray





PRODUCT FEATURES:

- :: Powder-coated finish
- :: Suitable for wet locations NEMA 3R rated
- :: Connector outlets accept threaded fittings & conduit
- :: Retail-ready packaging (Shrink-wrapped with barcode)
- :: Closure plugs, foam gaskets & mounting screws are included

APPLICATION:

:: Used with one-gang weatherproof box when additional wiring space is required

FAX: 877-809-2252

Ref: **UL**File#: **E 2 0 4 2 5 9**

ONE-GANG EXTENSION BOXES | I-3/8" DEEP

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
WXB50-4	1/2"	4	9.5	GRAY	20
WXB75-4	3/4"	4	9.5	GRAY	20
WXB50-6	1/2"	6	9.5	GRAY	20
WXB75-6	3/4"	6	9.5	GRAY	20





ONE-GANG FLANGED EXTENSION BOXES | I-9/I6" DEEP

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
WXF50-4	1/2"	4	13.5	GRAY	20
WXF75-4	3/4"	4	13.5	GRAY	20
WXF50-6	1/2"	6	13.5	GRAY	20
WXF75-6	3/4"	6	13.5	GRAY	20









- :: Dimensions: width 4-%6", height 4-1/2", depth 1-3/8"
- :: Material: die-cast aluminum with powder-coated finish
- :: Outlet holes: available with 6 or 8 outlets
- :: Hole sizes: available in 1/2" or 3/4" threaded outlet holes
- :: Color: gray



- :: Reinforced connector outlets
- :: Scratch resistant powder-coated finish
- :: Suitable for wet locations NEMA 3R rated
- :: Connector outlets accept threaded fittings & conduit :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Closure plugs, mounting lugs and ground screws included

APPLICATION:

:: Used with two-gang weatherproof box when additional wiring space is required

Ref: **UL**File#: **E 2 0 4 2 5 9**



W2XB50-6

W2XB75-6



TWO-GANG EXTENSION BOXES | I-9/I6" DEEP

ITEM NO.	TRADE SIZE	OUTLET HOLES	CUBIC INCH	COLOR	STD. PKG.
W2XB50-6	1/2"	6	15.0	GRAY	20
W2XB75-6	3/4"	6	15.0	GRAY	20
W2XB50-8	1/2"	8	15.0	GRAY	20





TECHNICAL SPECIFICATIONS:

- :: Dimensions:
- 1-gang: width 2-3/4" height 4-1/2" depth 1"
- 2-gang: width 4-1/6" height 4-1/2" depth 1"
- :: Material: die-cast aluminum with powder-coated finish

FAX: 877-809-2252

:: Includes gasket and mounting hardware

EXTENSION RINGS | I" DEEP

ITEM NO.	DESCRIPTION	CUBIC INCH	COLOR	STD. PKG.
WXR-1	SINGLE GANG	10	GRAY	24
WXR-2	TWO GANG	16.3	GRAY	20











- :: Dimensions: 4" diameter x 1-1/2" deep
- :: Material: die-cast aluminum with powder-coated finish
- :: Outlet holes: 5 holes (round box) /
 - 4 holes (round extension ring)
- :: Hole size: available with 1/2" or 3/4" outlets
- :: Color: gray (select items available in white and bronze)



- :: Reinforced connector outlets
- :: Scratch resistant powder-coated finish
- :: Suitable for wet locations NEMA 3R rated
- :: Connector outlets accept threaded fittings & conduit
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Closure plugs, ground screw included.
- :: Weatherproof rings include closure plugs and gasket

APPLICATIONS:

- :: Used for branch circuit wiring in wet, damp and dry locations
- :: Used as weatherproof junction boxes or to install round cluster covers and lamp holder combinations. Extension rings are used in conjunction with 4" round weatherproof boxes when additional wiring space is required.







WXR75-4

ROUND EXTENSION BOXES | 4"

ITEM NO.	DESCRIPTION	TRADE SIZE	OUTLET HOLES	CUBIC IN.	COLOR	STD. PKG.
WRB50-5	ROUND BOXES	1/2"	5	15.8	GRAY	40
WRB50-5-W	ROUND BOXES	1/2"	5	15.8	WHITE	40
WRB50-5-BRZ	ROUND BOXES	1/2"	5	15.8	BRONZE-	40
WRB75-5	ROUND BOXES	3/4"	5	15.8	GRAY	40

ROUND EXTENSION RINGS | 4"

ITEM NO.	DESCRIPTION	TRADE SIZE	OUTLET HOLES	CUBIC IN.	COLOR	STD. PKG.
WXR50-4	ROUND EXT. RINGS	1/2"	4	19.0	GRAY	20
WXR75-4	ROUND EXT. RINGS	3/4"	4	19.0	GRAY	20











TECHNICAL SPECIFICATIONS:

- :: Dimensions: 4" diameter
- :: Hole sizes: 1/2" & blank (flat)
- :: Color: gray; also available in white on selected items only; blank cover available in galvanized steel



WRC-1



PRODUCT FEATURES:

- :: Powder-coated finish
- :: Weather protection and scratch resistant
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Foam gaskets and installation hardware included





APPLICATIONS:

:: Used when an outdoor outlet requires weatherproof protection

Ref: ULFile#: **E 2 1 3 7 8 4** Ref: ULFile#: **E 2 0 4 2 5 9**

WRC-2

WRC-3

ROUND COVERS | 4"

ITEM NO.	OUTLET HOLES	TRADE SIZE	COLOR	STD. PKG.
WRC-1	1	1/2"	GRAY	50
WRC-1-W	1	1/2"	WHITE	50
WRC-1-BRZ	1	1/2"	BRONZE	50
WRC-2	2	1/2"	GRAY	50
WRC-2-W	2	1/2"	WHITE	50
WRC-2-BRZ	2	1/2"	BRONZE	50
WRC-3	3	1/2"	GRAY	50







TECHNICAL SPECIFICATIONS:

- :: Dimensions: 2-3/4" (w) x 4-1/2" (h)
- :: Material: die-cast aluminum with powder-coated finish
- :: Color: gray

ONE-GANG RECTANGULAR COVERS

ITEM NO.	OUTLET HOLES	TRADE SIZE	COLOR	STD. PKG.
WRE-1*	1	1/2"	GRAY	50
WRE-2*	2	1/2"	GRAY	50
WRE-3	3	1/2"	GRAY	50

^{*}Available in bronze



















- :: Dimensions: width 2-7/8" height 4-5/8"
- :: Material: die-cast aluminum with powder-coated finish
- :: Color: gray (select items available in white*) Exception: W1BC = aluminum & W1BC-G = (galvanized)



PRODUCT FEATURES:

- :: Self-closing lids protecting the receptacle when not in use
- :: Durable powder-coated finish
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Gaskets and installation hardware included

APPLICATION:

:: Used when an outdoor outlet or switch requires weatherproof protection



ONE-GANG DEVICE COVERS

ITEM NO.	DESCRIPTION	COLOR	STD. PKG.
W1BC	BLANK COVER	GRAY	100
W1BC-G	HEAVY DUTY GALVANIZED BLANK COVER	GRAY	100
W1C-DV	DUPLEX, VERTICAL	GRAY	50
W1C-GV	GFCI, VERTICAL – GFCI NOT INCLUDED	GRAY	50
W1C-GV-WH*	GFCI, VERTICAL – GFCI NOT INCLUDED	WHITE	50
W1C-PO20	20A RECEPTACLE, 1.60" DIAMETER, VERTICAL	GRAY	50
W1C-PO30	30A RECEPTACLE, 1.75" DIAMETER, VERTICAL	GRAY	50
W1C-PO40	40-50A RECEPTACLE, 2.30" DIAMETER, VERTICAL	GRAY	50
W1C-SV	SINGLE RECEPTACLE, VERTICAL	GRAY	50
W1C-SW	1 LEVER, VERTICAL, SWITCH NOT INCLUDED	GRAY	50
W1C-SW-S	1 LEVER, 15A SINGLE POLE SWITCH INCLUDED, VERTICAL	GRAY	50
W1C-TS	TOGGLE SWITCH, VERTICAL	GRAY	50
W1C-DH	DUPLEX, HORIZONTAL	GRAY	50
W1C-GH	GFCI, HORIZONTAL – GFCI NOT INCLUDED	GRAY	50
W1C-GH-WH*	GFCI, HORIZONTAL – GFCI NOT INCLUDED	WHITE	50

^{*}Available in white on selected items





FAX: 877-809-2252









FAX: 877-809-2252



W2C-SW

W2CL-PO50





- :: Dimensions: width 4-%6" height 4-1/2"
- :: Material: die-cast aluminum with Powder-coated finish
- :: Color: gray (except W2BC (aluminum) or W2BC-G (galvanized))

PRODUCT FEATURES:

- :: Self-closing lids protect the receptacle when not in use
- :: Durable powder-coated finish
- :: UV protected and scratch resistant
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Gaskets and installation hardware included

APPLICATION:

:: Used when an outdoor outlet requires weatherproof protection



TWO-GANG DEVICE COVERS

ITEM NO.	DESCRIPTION	COLOR	STD. PKG.
W2BC	BLANK COVER	ALUM	50
W2BC-G	HEAVY DUTY GALVANIZED BLANK COVER	GALV	50
W2C-2D	2 DUPLEX RECEPTACLES	GRAY	50
W2C-2G	2 GFCI/DECORA RECEPTACLES	GRAY	50
W2C-2S	2 SINGLE RECEPTACLES 1.406" DIAMETER	GRAY	50
W2C-GD	1 GFCI & 1 DUPLEX RECEPTACLE	GRAY	50
W2C-GS	1 GFCI & 1 SINGLE RECEPTACLE	GRAY	50
W2C-SD	1 DUPLEX & 1 SINGLE RECEPTACLE 1.41" DIAMETER	GRAY	50
W2C-SW	2 LEVERS + 2-15A SINGLE POLE SWITCHES -not included	GRAY	50
W2CL-PO50	40-50A RECEPTACLE, 2.125" DIAMETER, LOCKABLE	GRAY	50
W2CL-PO60	60A RECEPTACLE, 2.468" DIAMETER, LOCKABLE	GRAY	50
W2C-DH	1 OVER-SIZED DUPLEX, HORIZONTAL	GRAY	50











TECHNICAL SPECIFICATIONS:

- :: Dimensions: width 6-3/8", height 4-1/2"
- :: Material: die-cast aluminum with powder-coated finish
- :: Color: gray

Exception: W3BC = aluminum

PRODUCT FEATURES:

- :: Self-closing lids protect the receptacle when not in use
- :: Durable powder-coated finish
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: Gasket and installation hardware included

APPLICATION:

:: Used when an outdoor outlet requires weatherproof protection



THREE-GANG DEVICE COVERS

ITEM NO.	DESCRIPTION	COLOR	STD. PKG.
W3BC	BLANK COVER	ALUM	20
W3C-3D	3 DUPLEX RECEPTACLES	GRAY	20
W3C-3G	3 GFCI/DECORA RECEPTACLES	GRAY	20
W3C-3S	3 SINGLE 1.41" DIAMETER RECEPTACLES	GRAY	20



FAX: 877-809-2252









TECHNICAL SPECIFICATIONS:

- :: Material: die-cast aluminum with powder-coated finish
- :: Color: gray / bronze / black / white

PRODUCT FEATURES:

- :: Durable powder-coated finish
- :: Rated for PAR38 150 watt lamps (lamp not included)
- :: Locking swivel knuckle for positive pinpoint directional aiming
- :: Retail-ready packaging (shrink-wrapped with barcode)
- :: It can be mounted on round or rectangular box covers ½" NPT
- :: Combo pack, use UL-listed components only

Ref: **UL**File#: **E 3 4 9 8 7 4**

Tool FREE Adjustment

FAX: 877-809-2252



LAMPHOLDERS

ITEM NO.	DESCRIPTION	COLOR	STD. PKG.
LH150-1	WEATHERPROOF LAMP HOLDER, 120V PAR38 150W WITH GASKET	GRAY	50
LH150-COMBO-WH	2 X LH150 LAMP HOLDERS, 4" ROUND COVER, THUMB SCREW	WHITE	-
LH150-COMBO-BZ	2 X LH150 LAMP HOLDERS, 4" ROUND COVER, THUMB SCREW	BRONZE	-
LH150-COMBO-GR	2 X LH150 LAMP HOLDERS, 4" ROUND COVER, THUMB SCREW	GRAY	-















LH150-GASKET

WRC-GASKET

WG-1

GASKETS

ITEM NO.	DESCRIPTION	COLOR	STD. PKG.
LH150-GASKET	SILICON GASKET FOR LH150	BLACK	-
WRC-GASKET	GASKET FOR 4" ROUND COVER	BLACK	-
WG-1	UNIVERSAL 1-GANG FOAM GASKET	BLACK	50









PL-100

PLUGS

ITEM NO.	DESCRIPTION	COLOR	STD. PKG.
PL-50	1/2" W/P CLOSE-UP PLUG	GRAY	20
PL-75	3/4" W/P CLOSE-UP PLUG	GRAY	20
PL-100	1" W/P CLOSE-UP PLUGS	GRAY	20



LUG OO

MOUNT LUG

ITEM NO.	DESCRIPTION	COLOR	STD. PKG.
LUG 00	TWO HOLE MOUNTING LUG FOR W/P BOX	GRAY	500









PRODUCT FEATURE:

- :: Polycarbonate construction
- :: Ideal for dusk to dawn operation
- :: 1/2 NPT threads fit into 1/2" weather proof box outlets
- :: Wet location listed (NEMA 3R rated)
- :: Full one year warranty











PC-FS1

PC-FSB1



PC-SM1







PC-SMWS1

PC-SM2

PHOTOCONTROLS | 120V

ITEM NO.	DESCRIPTION	RATING
PC-B1	BUTTON PHOTOCONTROL 120V MAX 500W	120V/500W
PC-B1-W	BUTTON PHOTOCONTROL 120V WITH WALL PLATE MAX 500W	120V/ 500W
PC-FS1	PHOTOCONTROL SWIVEL 120V MAX 1800W	120V/ 1800W
PC-FSB1	PHOTOCONTROL SWIVEL 120V RAIN TIGHT MAX 1800W	120V/ 1800W
PC-SM1	STEM-MOUNT PHOTOCONTROL 120V MAX 1800W	120V/ 1800W
PC-SMWS1	STEM-MOUNT PHOTOCONTROL WITH SWIVEL 120V MAX 1800W	120V/ 1800W

PHOTOCONTROLS | 240V & 277V

ITEM NO.	DESCRIPTION	RATING
PC-B2	BUTTON PHOTOCONTROL 240V MAX 500W	240V/ 500W
PC-SM2	STEM-MOUNT PHOTOCONTROL 240V MAX 1800W	240V/ 1800W




FAX: 877-809-2252







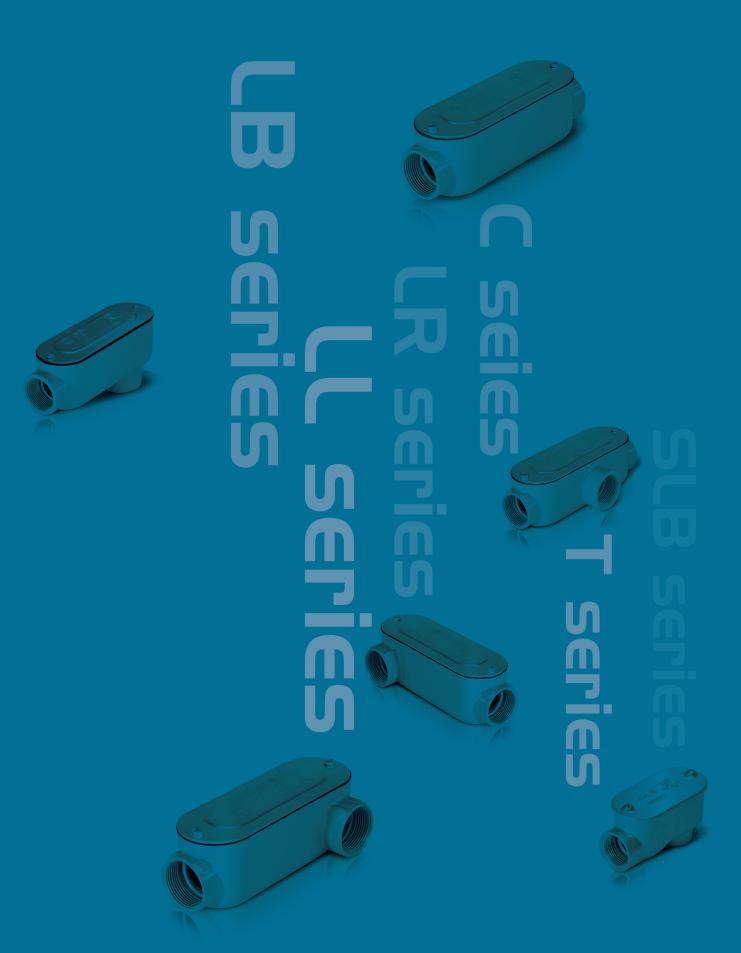

conduit bodies

Westgate's wide variety of UL-listed conduit bodies are designed to meet a wide range of applications for jobs in residential, commercial and industrial situations. Conduit body covers and gaskets are made of the highest quality materials and are designed to withstand the most abusive environments.







- :: UL listed
- :: Trade size: available from ½" through 4" NPT
- :: Material: die-cast aluminum with corrosion resistant screws
- :: Color: gray powder coat finish, clear anodized cover

PRODUCT FEATURES:


- :: Complete with cover and gasket
- :: Polyester powder-coated finish
- :: NEMA 3R weather protection and scratch resistant
- :: Ships with protective peel-off tape on cover to protect lettering from being defaced
- :: Complete with combination screw head (phillips, flat blade and pan head).
- :: Conduit body is fully assembled; shrink wrapped with UPC bar code label

APPLICATIONS:

- :: Attaches directly to rigid or IMC threaded conduit or EMT using standard electrical fittings
- :: Large wiring chamber allows for easy wire pulling and feed through.
- :: Used for electrical service entrance work or a convenient in-line pull box when extra pulling space is needed.

FAX: 877-809-2252









THREADED CONDUIT BODIES | TYPE "LB" SERIES

ITEM NO.	TRADE SIZE	DIMENSIONS			COLOR	STD	PKG.
		Α	В	С		INNER	MASTER
LB-50CG	1/2"	4-5/16"	1-5/16"	2-11/32"	GRAY	10	50
LB-75CG	3/4"	5-3/32"	1-9/16"	2-5/8"	GRAY	10	40
LB-100CG	1"	5-29/32"	1-13/16"	3"	GRAY	5	50
LB-125CG	1-1/4"	7-13/16"	2-1/2"	3-3/4"	GRAY	2	40
LB-150CG	1-1/2"	7-13/16"	2-1/2"	3-3/4"	GRAY	2	50
LB-200CG	2"	10-1/16"	3-3/16"	4-3/4"	GRAY	1	50
LB-250CG	2-1/2"	12-13/16"	4-1/2"	5-%16"	GRAY	-	50
LB-300CG	3"	12-13/16"	4-1/2"	6-5/32""	GRAY	-	40
LB-400CG	4"	15-5/8"	5-%16"	7-%16"	GRAY	-	50









- :: Trade size: available from ½" through 4" NPT
- :: Material: die-cast aluminum with corrosion resistant screws
- :: Color: gray powder coat finish, clear anodized cover


PRODUCT FEATURES:

- :: Complete with cover and gasket
- :: Polyester powder-coated finish
- :: NEMA 3R weather protection and scratch resistant
- :: Ships with protective peel-off tape on cover to protect lettering from being defaced
- :: Complete with combination screw head (phillips, flat blade and pan head).
- :: Conduit body is fully assembled; shrink wrapped with UPC bar code label

APPLICATIONS:

- :: Attaches directly to rigid or IMC threaded conduit or EMT using standard electrical fittings
- :: Large wiring chamber allows for easy wire pulling and feed through.
- :: Used for electrical service entrance work or a convenient in-line pull box when extra pulling space is needed.







THREADED CONDUIT BODIES | TYPE "LU" SERIES

ITEM NO.	TRADE SIZE	DIMENSIONS			COLOR	STD	. PKG.
		Α	В	С		INNER	MASTER
LL-50CG	1/2"	4-5/16"	2-1/32"	1-5/8"	GRAY	10	100
LL-75CG	3/4"	5-3/32"	2-5/16"	1-7/8"	GRAY	10	50
LL-100CG	1"	5-29/32"	2-11/16"	2-1/8"	GRAY	5	25
LL-125CG	1-1/4"	7-13/16"	3-1/2"	2-3/4"	GRAY	2	10
LL-150CG	1-1/2"	7-13/16"	3-1/2"	2-3/4"	GRAY	2	10
LL-200CG	2"	10-1/16"	4-9/32"	3-5/8"	GRAY	1	5
LL-250CG	2-1/2"	12-13/16"	5-7/8"	4-1/4"	GRAY	-	1
LL-300CG	3"	12-13/16"	5-7/8"	4-3/4"	GRAY	-	1
LL-400CG	4"	15-5/8"	7-21/32"	5-7/8"	GRAY	-	1





FAX: 877-809-2252





- :: Trade size: available from ½" through 4" NPT
- :: Material: die-cast aluminum with corrosion resistant screws
- :: Color: gray powder coat finish, clear anodized cover

PRODUCT FEATURES:


- :: Complete with cover and gasket
- :: Polyester powder-coated finish
- :: NEMA 3R weather protection and scratch resistant
- :: Ships with protective peel-off tape on cover to protect lettering from being defaced
- :: Complete with combination screw head (phillips, flat blade and pan head).
- :: Conduit body is fully assembled; shrink wrapped with UPC bar code label



- :: Attaches directly to rigid or IMC threaded conduit or EMT using standard electrical fittings
- :: Large wiring chamber allows for easy wire pulling and feed through.
- :: Used for electrical service entrance work or a convenient in-line pull box when extra pulling space is needed.







THREADED CONDUIT BODIES | TYPE "LR" SERIES

ITEM NO.	TRADE SIZE	DIMENSIONS			COLOR	STD	. PKG.
		Α	В	С		INNER	MASTER
LR-50CG	1/2"	4-5/16"	2-1/32"	1-5/8"	GRAY	10	100
LR-75CG	3/4"	5-3/32"	2-5/16"	1-7/8"	GRAY	10	50
LR-100CG	1"	5-29/32"	2-11/16"	2-1/8"	GRAY	5	25
LR-125CG	1-1/4"	7-13/16"	3-1/2"	2-3/4"	GRAY	2	10
LR-150CG	1-1/2"	7-13/16"	3-1/2"	2-3/4"	GRAY	2	10
LR-200CG	2"	10-1/16"	4-9/32"	3-5/8"	GRAY	1	5
LR-250CG	2-1/2"	12-13/16"	5-7/8"	4-1/4"	GRAY	-	1
LR-300CG	3"	12-13/16"	5-7/8"	4-3/4"	GRAY	-	1
LR-400CG	4"	15-5/8"	7-21/32"	5-7/8"	GRAY	-	1











- :: Trade size: Available from ½" through 4" NPT
- :: Material: die-cast aluminum with corrosion resistant screws
- :: Color: gray powder coat finish, clear anodized cover

PRODUCT FEATURES:

- :: Complete with cover and gasket
- :: Polyester powder-coated finish
- :: NEMA 3R weather protection and scratch resistant
- :: Ships with protective peel-off tape on cover to protect lettering from being defaced
- :: Complete with combination screw head (phillips, flat blade and pan head).
- :: Conduit body is fully assembled; shrink wrapped with UPC bar code label

APPLICATIONS:

- :: Attaches directly to rigid or IMC threaded conduit or EMT using standard electrical fittings
- :: Large wiring chamber allows for easy wire pulling and feed through.
- :: Used for electrical service entrance work or a convenient in-line pull box when extra pulling space is needed.


FAX: 877-809-2252





Available sizes from

1/2" to 4"



THREADED CONDUIT BODIES | TYPE "C" SERIES

ITEM NO.	TRADE SIZE	DIMENSIONS			COLOR	STD	. PKG.
		Α	В	С		INNER	MASTER
C-50CG	1/2"	4-11/16"	1-5/16"	1-5/8"	GRAY	10	100
C-75CG	3/4"	5-1/2"	1-9/16"	1-7/8"	GRAY	10	50
C-100CG	1"	6-7/16"	1- ¹³ / ₁₆ "	2-1/8"	GRAY	5	25
C-125CG	1-1/4"	8-3/8"	2-1/2"	2-3/4"	GRAY	2	10
C-150CG	1-1/2"	8-3/8"	2-1/2"	2-3/4"	GRAY	2	10
C-200CG	2"	10-%16"	3-3/16"	3-5/8"	GRAY	1	5
C-250CG	2-1/2"	13-1/2"	4-1/2"	4-1/4"	GRAY	-	1
C-300CG	3"	13-1/2"	4-1/2"	4-3/4"	GRAY	-	1
C-400CG	4"	16-5/16"	5-%6"	5-7/8"	GRAY	-	1











- :: UL listed
- :: Trade size: available from 1/2" through 4" NPT
- :: Material: die-cast aluminum with corrosion resistant screws
- :: Color: gray powder coat finish, clear anodized cover

PRODUCT FEATURES:

- :: Complete with cover & gasket
- :: Polyester powder-coated finish
- :: NEMA 3R weather protection and scratch resistant
- :: Ships with protective peel-off tape on cover to protect lettering from being defaced
- :: Complete with combination screw head (phillips, flat blade and pan head).
- :: Conduit body is fully assembled; shrink wrapped with UPC bar code label

APPLICATIONS:


- :: Attaches directly to rigid or IMC threaded conduit or EMT using standard electrical fittings
- :: Large wiring chamber allows for easy wire pulling and feed through.
- :: Used for electrical service entrance work or a convenient in-line pull box when extra pulling space is needed.

FAX: 877-809-2252



Available sizes from 1/2" to 4"





THREADED CONDUIT BODIES | TYPE "T" SERIES

ITEM NO.	TRADE SIZE	DIMENSIONS			COLOR	STD	. PKG.
		Α	В	С		INNER	MASTER
T-50CG	1/2"	4-11/16"	2-1/32"	1-5/8"	GRAY	10	100
T-75CG	3/4"	5-1/2"	2-5/16"	1-7/8"	GRAY	10	50
T-100CG	1"	6-7/16"	2-11/16"	2-1/8"	GRAY	5	25
T-125CG	1-1/4"	8-3/8"	3-1/2"	2-3/4"	GRAY	2	10
T-150CG	1-1/2"	8-3/8"	3-1/2"	2-3/4"	GRAY	2	10
T-200CG	2"	10-%16"	4-9/32"	3-5/8"	GRAY	1	5
T-250CG	2-1/2"	13-1/2"	5-7/8"	4-1/4"	GRAY	-	1
T-300CG	3"	13-1/2"	5-7/8"	4-3/4"	GRAY	-	1
T-350CG	3-1/2"	16-5/16"	7-21/32"	5-7/8"	GRAY	-	1
T-400CG	4"	16-5/16"	7-21/32"	5-7/8"	GRAY	-	1










- :: Trade size: available from ½" through 1" NPT
- :: Material: die-cast aluminum with corrosion resistant screws
- :: Color: gray powder coat body and cover
- :: SLB body is fully assembled; shrink wrapped with UPC bar code label










THREADED CONDUIT BODIES | TYPE "SLB" SERIES

ITEM NO.	TRADE SIZE	DIMENSIONS			COLOR	STD	. PKG.
		Α	В	С		INNER	MASTER
SLB-50	1/2"	3-%2"	1-3/8"	1-5/8"	GRAY	20	100
SLB-75	3/4"	3-19/32"	1-9/16"	1-27/32"	GRAY	20	50
SLB-100	1"	4-5/16"	1-31/32"	2-1/8"	GRAY	20	50







FAX: 877-809-2252

COVERS & GASKETS for threaded conduit bodies

ITEM NO.	TRADE SIZE	DIMENSIONS			COLOR	STD	. PKG.
		Α	В	С		INNER	MASTER
CG-50	1/2"	3-7/8"	1-5/16"	-	GRAY	50	250
CG-75	3/4"	4-11/16"	1-9/16"	-	GRAY	50	250
CG-100	1"	5-3/8"	1-3/4"	-	GRAY	50	200
CG-125/150	1-1/4" & 1-1/2"	7-5/16"	2-1/2"	-	GRAY	-	100
CG-200	2"	9-1/2"	3-1/8"	-	GRAY	5	25
CG-250/300	2-1/2" & 3"	12-1/16"	4-7/16"	-	GRAY	-	20
CG-350/400	3-1/2" & 4"	15-1/16"	5/9/2016	-	GRAY	-	10







Westgate's new feed-through armored ground clamp saves time, labor and material by allowing you to feed armored ground through the clamp and onto the next connection. Ground wire does not get cut! Cut only the outer armored jacket and insert ground wire into center lug. Secure each side of the armored jacket into the strain reliefs located on each side of the clamp.

FEATURES:

- :: Rated for use with ground rods and rebar, plus steel, iron and copper pipes.
- :: Pipe range: 1/2" ~ 3/4"
- :: Wire Range: #14 AWG through #4

ELECTRICAL FITTINGS

- :: Ideal for residential, commercial and industrial applications
- :: Armored ground clamps are used to bonding armored cable to rebar, ground rods, copper or steel water pipes.
- :: All fittings are UL listed and manufactured from high strength bronze alloy known for it's high conductivity.
- :: Meets NEC (National Electric Code) requirements.





(OLD MODEL)

Feed through opening

FEED-THROUGH ARMORED GROUND CLAMP

ITEM NO.	PIPE SIZE	WIRE SIZE	STD	. PKG.
			INNER	MASTER
MVP99	1/2" ~ 1"	4-6-8	-	125



Saves time, labor and material by feeding armored ground from any direction. Landing lug rotates 90–180–270 degrees. Ideal for tight spaces or short runs that make changing direction hard! Reduce cable runs, save time and simplify installation. Rated for use with ground rods and rebar, plus steel, iron and copper pipes.

FEATURES:

- :: Pipe range: 1/2" ~ 3/4"
- :: Wire Range: #14 AWG through #4
- :: Ideal for residential, commercial, and industrial applications
- :: Armored ground clamps are used to bonding armored cable to rebar, ground rods, copper or steel water pipes.
- :: All fittings are UL listed and manufactured from high strength bronze alloy known for it's high conductivity.
- :: Meets NEC (National Electric Code) requirements.

Ref: ULFile#: **E 3 1 7 8 1 5**

DIRECTIONAL ARMORED GROUND CLAMP

FAX: 877-809-2252

ITEM NO.	PIPE SIZE	WIRE SIZE	STD	. PKG.
			INNER	MASTER
MVP98	1/2" ~ 1"	4-6-8	-	115





GROUNDBREAKING, TIME-SAVING

ELECTRICAL GROUNDING PRODUCTS!







Westgate's new feed-through armored ground clamp saves time, labor and material by allowing you to feed armored ground through the clamp and onto the next connection. Ground wire does not get cut! Cut only the outer armored jacket and insert ground wire into center lug. Secure each side of the armored jacket into the strain reliefs located on each side of the clamp.

FEED-THROUGH ARMORED GROUND CLAMP

ITEMNO.	PIPE SIZE	WIRE SIZE	STD.PKG.
			INNER MASTER
MVP99	1/2" ~ 1"	4-6-8	25 100



Westgate upgraded MVP98 model "MVP99-360-1C" offers 360 degree rotatability with 1 armor clamp to be installed at the end of the run so armored ground cable could be fed from any direction, reducing cable run, simplifying installation and saving time. The upgraded model also makes tightening of the armored cable quick and easy.

FEED-THROUGH ARMORED GROUND CLAMP

ITEM NO. T	RADE SIZE	WIRE SIZE	STE). PKG.
			INNER	MASTER
MVP99-360-1C	1/2" ~ 1"	4-6-8	25	100



- **FEATURES:**
- :: Install on metal pipe 1/2"~ 3"
- Wood post or flat surface mounted
- :: Torq 25 pounds pulling
- :: Wire range: #14 ~ #18

PORCELAIN WIRE HOLDER ON METAL BRACKET

ITEMNO.	PIPE SIZE	WIRE SIZE	STD.PKG.	
MVP95-2P	1/2" ~ 3"	#14 ~ #18	1	
MVP95-3P	1/2" ~ 3"	#14 ~ #18	1	
MVP95-4P	1/2" ~ 3"	#14 ~ #18	1	



Saves time, labor and material by feeding armored ground from any direction. Landing lug rotates 90-180-270 degrees. Ideal for tight spaces or short runs that make changing direction hard! Reduce cable runs, save time and simplify installation. Rated for use with ground rods and rebar, plus steel, iron and copper pipes.

DIRECTIONAL ARMORED GROUND CLAMP

ITEMNO.	PIPE SIZE	WIRE SIZE	STD.PKG.
			INNER MASTER
MVP98	1/2" ~ 1"	4-6-8	25 100



Westgate upgraded MVP99 model MVP99-360-2C offers 360 degrees rotatability with 2 armor clamps to be used in the middle of the run so armored ground cable could be fed from any direction, reducing cable run, simplifying installation and saving time. The upgraded model also makes tightening of the armored cable quick and easy.

FEED-THROUGH ARMORED GROUND CLAMP

ITEM NO. T	RADE SIZE	WIRE SIZE	STD. PKG.
			INNER MASTER
MVP99-360-2C	1/2" ~ 1"	4-6-8	25 100

This time-saving product makes the job easier. Bending bare wire is no longer necessarily since the lug may be oriented in 3 different positions.



FEED-THROUGH ARMORED GROUND CLAMP

:: Meets NEC (National Electric Code) requirements.

ITEM NO. T	RADE SIZ	E WIRE SIZE	STE	.PKG.
			INNER	MASTER
MVP94-50 MVP94-75	½" 3⁄4"	#14 ~ #4 #14 ~ #4	20 20	600 600

C32



FEATURES:

- :: Trade size: available from ½" to 4" Rigid
- :: Copper-free aluminum with steel bracket

APPLICATION:

:: Used as entrance cap for rigid or IMC conduit

Ref: **UL**File#: **E 2 0 7 0 3 9**

DIE-CAST CLAMP-ON SERVICE ENTRANCE CAPS

пем по.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
WC2-50	1/2"	-	100
WC2-75	3/4"	-	100
WC2-100	1"	-	100
WC2-125	1-1/4"	-	60
WC2-150	1-1/2"	-	20
WC2-200	2"	-	5
WC2-250	2-1/2"	-	1
WC2-300	3"	-	1
WC2-350	3-1/2"	-	1
WC2-400	4"	-	1
		-	
	WC2-50 WC2-75 WC2-100 WC2-125 WC2-150 WC2-200 WC2-250 WC2-350	WC2-50	WC2-50 ½" - WC2-75 ¾" - WC2-100 1" - WC2-125 1-¼" - WC2-150 1-½" - WC2-200 2" - WC2-200 2"/2" - WC2-300 3" - WC2-350 3-½" - WC2-400 4" -





C33



FEATURES:

- :: Available in 10 or 12 gauge
- :: Weight rating: 10 gauge (35 lbs) 12 gauge (25 lbs)
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

STEEL JACK CHAIN 100 FT.

GAUGE	STD. PKG.	
	INNER	MASTER
10	-	100
12	-	100
		10 -





FEATURES:

- :: Trade size: available from ½" to 2"
- :: Die cast aluminum
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

STEEL FIXTURE HANGERS

GAUGE	MOUNT	STD	. PKG.
		INNER	MASTER
10GA	TOP-MOUNT	100	500
10GA	SIDE-MOUNT	100	500
	10GA	100/1 101 11100111	INNER 10GA TOP-MOUNT 100





FEATURES:

- :: Trade size: available from 1/4" wood screw to 3" long
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations

STEEL FLAT HANGER SCREW WITH SINGLE HOLE

ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
H-SCREW	1/4" x 3"	100	500



FEATURES:

- :: For 10-2, 12-2, 12-3, 14-2, 14-3 Romex
- :: Zinc phosphate electroplated for excellent corrosion protection in damp locations






ITEM NO.	TRADE SIZE	STD. PKG.	
		INNER	MASTER
YL25-100	10~14	100	5000
YL25-500	10~14	500	5000
YL25-B	10~14	-	5000







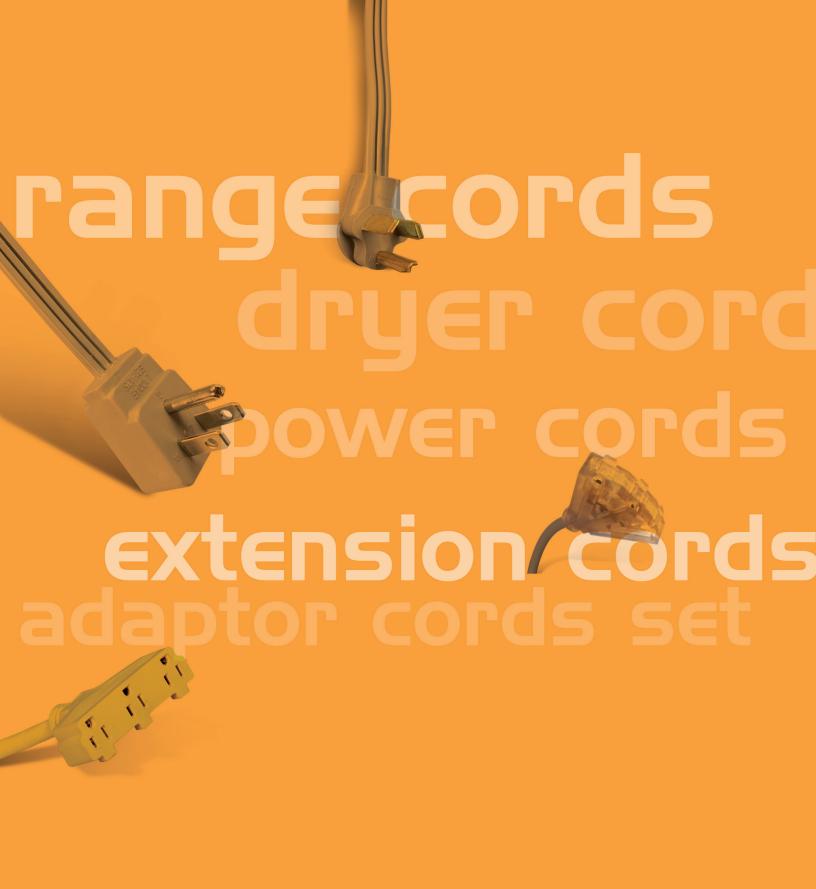



cords

Westgate offers a wide array of popular range, dryer, general-purpose, outdoor extension cords and cord sets that meet many different applications. They are all designed and UL-listed to deliver the best performance possible.



- :: Right angle plug with thick vinyl insulation
- :: Installation hardware included
- :: Reinforced blades help prevent accidental bending or breaking

APPLICATIONS:

- :: Replacement cords for range or dryer
- :: For home and commercial appliances






ANGLE PLUG, GENERAL-PURPOSE CORDS | 125V-13A, GRAY

CAT NO.	DESCRIPTION	RATING	LENGTH	STD. PKG.
GPA3-2	SPT-2 16AWG/ 3 CONDUCTOR, ANGLE PLUG, NEMA 5-15P, 125V, GRAY	13A	3 FEET	50
GPA3-3	SPT-3 16AWG/ 3 CONDUCTOR, ANGLE PLUG, NEMA 5-15P, 125V, GRAY	13A	3 FEET	50
GPA6-2	SPT-2 16AWG/ 3 CONDUCTOR, ANGLE PLUG, NEMA 5-15P, 125V, GRAY	13A	6 FEET	50
GPA6-3	SPT-3 16AWG/ 3 CONDUCTOR, ANGLE PLUG, NEMA 5-15P, 125V, GRAY	13A	6 FEET	50
GPA8-2	SPT-2 16AWG/ 3 CONDUCTOR, ANGLE PLUG, NEMA 5-15P, 125V, GRAY	13A	8 FEET	50
GPA8-3	SPT-3 16AWG/ 3 CONDUCTOR, ANGLE PLUG, NEMA 5-15P, 125V, GRAY	13A	8 FEET	50





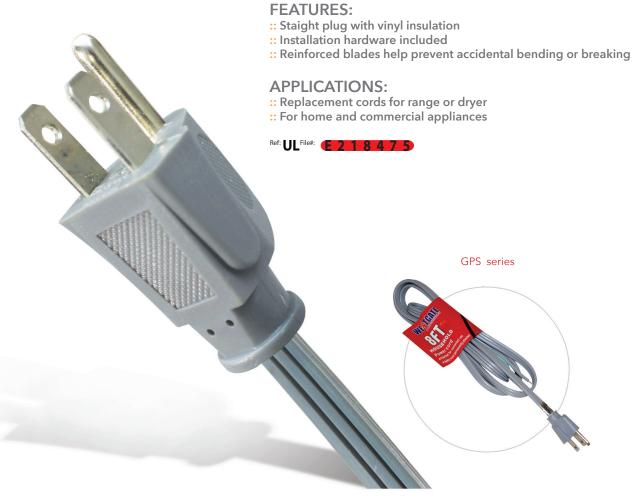

STRAIGHT PLUG, GENERAL-PURPOSE CORDS | 125V-13A, GRAY

CAT NO.	DESCRIPTION	RATING	LENGTH	STD. PKG.
GPS3-2	SPT-2 16AWG/ 3 CONDUCTOR, STRAIGHT PLUG, NEMA 5-15P, 125V, GRAY	13A	3 FEET	50
GPS3-3	SPT-3 16AWG/ 3 CONDUCTOR, STRAIGHT PLUG, NEMA 5-15P, 125V, GRAY	13A	3 FEET	50
GPS6-2	SPT-2 16AWG/ 3 CONDUCTOR, STRAIGHT PLUG, NEMA 5-15P, 125V, GRAY	13A	6 FEET	50
GPS6-3	SPT-3 16AWG/ 3 CONDUCTOR, STRAIGHT PLUG, NEMA 5-15P, 125V, GRAY	13A	6 FEET	50
GPS8-2	SPT-2 16AWG/ 3 CONDUCTOR, STRAIGHT PLUG, NEMA 5-15P, 125V, GRAY	13A	8 FEET	50
GPS8-3	SPT-3 16AWG/ 3 CONDUCTOR, STRAIGHT PLUG, NEMA 5-15P, 125V, GRAY	13A	8 FEET	50





Westgate's low-voltage cable is rated for direct burial and is ideal for landscape lighting applications. Available in 500-foot spools.

FEATURES:

- :: For all types of low-voltage jobs
- :: Available in 8, 10, 12 and 14-gauges
- :: Rated for direct burial
- :: UV resistant
- :: Stranded pure copper conductor
- :: PVC insulation is flexible and very easy to work with; UV inhibitors for added protection.
- :: Remains flexible in cold climates and resists polymerization from the sun.
- :: Wood spool EZ pull box

APPLICATION:

:: Specifically designed for low voltage landscape lighting and outdoor lighting applications







FAX: 877-809-2252

LOW-VOLTAGE DIRECT BURIAL LANDSCAPE LIGHTING WIRE

CAT NO.	WIRE SIZE	STRANDING	COLOR	STD. PKG.
LOV-14 LOV-12 LOV-10 LOV-8	14AWG 12AWG 10AWG 8AWG	41 X 30 65 X 30 104 X 30 168 X 30	BLACK	500 FT. PER REEL/BOX









TERMS & CONDITIONS

[Effective January 1, 2014]

1. Return Policy

- a. Westgate Mfg is committed to providing 100% customer satisfaction. Returns are allowed for any reason on most items within 30 days of purchase with no restocking fees.
- b. Items must be returned in original packaging, including parts and manuals.
- c. All items must be returned in new condition, with an RGA form issued by Westgate Mfg. Due to the fluctuating price of copper, all purchases of wires and cable are final.
- d. Westgate Mfg strives to provide premium quality products that exceed UL standards and consumer expectations. All items are guaranteed for one full year in the case that items are found defective. (See Section 4 for more info on Westgate Mfg's Product Guarantee.)

2. Freight & Shipping Terms

- a. All shipments may be shipped to distributors stock, or any other location within the contiguous United States.
- b. Freight will be prepaid on each order or back order of \$1500.00 or more outside California, delivered to one single location within the contiguous United States (excluding Alaska and Hawaii).
- c. Customers may use their own carrier for shipping. Using Westgate "PP & Add" service will include handling charges.
- d. All items that are available in local stock and are ready to ship or will call the same day. However, Westgate Mfg shall not be held liable for any delay in shipping or handling of goods.

3. Purchasing Terms and Prices

- a. There is no minimum purchase requirement on orders. Items may be ordered by package quantity or in smaller quantities at no additional charge.
- b. Prices are subject to change without notice.
- c. Prices in Pricebook are for reference only and do not indicate maximum prices. Westgate reserves the right to charge any price based on its sole judgement.
- d. All prices round up to the nearest cent. Actual invoice prices may vary slightly.
- e. 30 day credit terms are available to purchasers with approved credit. A 1-1/2% finance charge per month may be assessed to accounts with past due balances.
- f. Purchaser will be held responsible for any returned check fees or legal fees due to failure of payment.
- g. Westgate Mfg reserves the right to refuse credit to anyone.

4. Product Guarantee

- a. Westgate brand products are warranted against defects in material and workmanship. In the event of any defects, Westgate Mfg promises only to repair or replace the defective products, free of charge. Westgate Mfg's liability is expressly limited to the cost of the initial product and any consequential damages arising out of the event of a defect are expressly excluded.
- b. Westgate Mfg guarantees its products against manufacturing defects for ONE FULL YEAR, provided that the product has been used in accordance with installation standards and the National Electrical Code.
- c. Some products have different guarantee policies. Westgate ballasts are guaranteed for THREE YEARS.

5. Product Changess

a. The specifications and designs of our products may change in accordance with new codes and standards at any time without notice.

All purchases from Westgate are under this and other terms and conditions instructed by Westgate.

WESTGATE MFG INC. ALL RIGHTS RESERVED

WESTGATE MFG