

## TECHNICAL SPECIFICATIONS:

- :: Construction: Spun aluminum with white powder coat finish
- :: Optics: White translucent acrylic lens
- :: Isolated driver for improved thermal management
- :: Output Voltage: 36VDC
- :: Input Voltage: 120V AC
- :: Dimmable down to 10% using an approved dimmer (refer to website for more information)
- :: LED: Epistar chip (COB) and driver-35,000-hour design life
- :: CRI: 90+
- :: Power Factor: 90%
- :: Suitable for wet locations
- :: Maximum ambient 104°F
- :: Total Harmonic Distortion: ≤15 %
- :: Operating temperature: 68°F~113°F
- :: 5-year warranty
- :: UL-listed
- :: Energy Star certified

























Includes medium base E-26 screw-in adapter that fits any standard incandescent downlight

# LED DOWNLIGHTS (SMOOTH TRIM)-4" & 5"/6" ROUND

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	DIAMETER
RDL4-27K-WP	dentities 12W	2700K	650LM	
RDL4-30K-WP	12W	3000K	700LM	
RDL4-35K-WP	12W	3500K	725LM	A "
RDL4-41K-WP	12W	4100K	750LM	4
RDL4-50K-WP	12W	5000K	800LM	
RDL4-65K-WP	12W	6500K	850LM	
RDL6-27K-WP	19W	2700K	1200LM	
RDL6-30K-WP	19W	3000K	1250LM	
RDL6-35K-WP	19W	3500K	1275LM	E" /C"
RDL6-41K-WP	19W	4100K	1300LM	<b>J</b> /b
RDL6-50K-WP	19W	5000K	1350LM	
RDL6-65K-WP	19W	6500K	1400LM	

# RDL-BF







## **TECHNICAL SPECIFICATIONS:**

- :: Die-cast aluminum with white powder coat finish (Oil-Rubbed Bronze Finish available in 3000K)
- :: Gasket: closed cell Neoprene foam gasket
- :: Lens: 0.125" white translucent acrylic
- :: Isolated driver for improved thermal management
- :: CRI: 90
- :: Working voltage: 120V AC
- :: Dimmable
- :: LED: Epistar chip (COB) and driver-35,000-hour design life
- :: Power factor: 90% +
- :: Suitable for damp locations when gasket is used
- :: Maximum Ambient Temperature: 104°F
- :: 5-year warranty
- :: UL-listed
- :: Energy Star certified

























Includes medium base E-26 screw-in adapter that fits any standard incandescent downlight

# LED DOWNLIGHTS (BAFFLE TRIM)-4" & 5"/6" ROUND

CATA	LOG NO.	WATTS	COLOR TEMP	LUMENS	DIAMETER
WHITE	OIL-RUBBED BRONZE	WAIIS	COLOR TEMP	LUMENS	DIAMETER
RDL4-BF-27K	-	10W	2700K	650LM	
RDL4-BF-30K	RDL4-BF-30K-ORB	10W	3000K	680LM	4 11
RDL4-BF-35K	-	10W	3500K	720LM	4
RDL4-BF-41K	•	10W	4100K	746LM	
RDL4-BF-50K		10W	5000K	761LM	
RDL6-BF-27K	*	18W	2700K	1102LM	
RDL6-BF-30K	RDL6-BF-30K-ORB	18W	3000K	1204LM	=" /o"
RDL6-BF-35K	•	18W	3500K	1280LM	5/6
RDL6-BF-41K		18W	4100K	1300LM	0 / 0
RDL6-BF-50K	•	18W	5000K	1350LM	

# **RDL**





Emergency Backup Driver
FOR ALL LED BULBS & RECESSED TRIMS
can be used with A/C-direct T8 lamps

## TECHNICAL SPECIFICATIONS:

- :: Construction: Spun aluminum with white powder coat finish
- :: Optics: White translucent acrylic lens
- :: Isolated driver for improved thermal management
- :: Output Voltage: 36VDC
- :: Input Voltage: 120V AC
- :: Dimmable down to 10% using a standard TRIAC LED dimmer (refer to website for more information)
- :: LED: Epistar chip (COB) and driver—35,000-hour design life
- :: CRI: 90+
- :: Power Factor: 90%
- :: Suitable for wet locations
- :: Maximum ambient 104°F
- :: Total Harmonic Distortion: ≤15 %
- :: Operating temperature: 68°F~113°F
- :: 5-year warranty
- :: UL-listed
- :: Energy Star certified























### ACCESSORIES INCLUDED



Includes medium base E-26 screw-in adapter that fits any standard incandescent downlight

# LED DOWNLIGHTS (SMOOTH TRIM)—3" ROUND

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	DIAMETER
RDL3-27K-WP	Gentlick Street State	2700K	540LM	- 11
RDL3-30K-WP	9W	3000K	540LM	2"
RDL3-41K-WP	9W	4100K	540LM	3
RDL3-50K-WP	9W	5000K	540LM	

## **EMERGENCY BACKUP DRIVER FOR ALL TRIMS & LAMPS UP TO 18W**

CATALOG NO. DESCRIPTION

Field-installed emergency driver for all LED bulbs & recessed trims up to 8W, can be used with A/C-direct T8 lamps. Input voltage: 100-277VAC, Emergency operation: 290 mins., Recharge: 24 Hrs.

**WESTGATE MFG** 

# RDL-ADJ



## **TECHNICAL SPECIFICATIONS:**

- :: Die-cast aluminum with white powder coat finish
- :: Trim ring: Integrated spun aluminum white powder coat finish
- :: Gasket: closed cell Neoprene foam gasket
- :: Lens: 0.125" white translucent acrylic
- :: Isolated driver for improved thermal management
- :: CRI: 90
- :: Working Voltage: 120V AC
- :: Dimmable down to 10% using a standard TRIAC LED dimmer
- :: Tilts to 45°
- :: Can rotate after installation to align
- :: LED: Epistar chip (COB) and driver-35,000-hour design life
- :: Power factor: 90% +
- :: Suitable for damp locations
- :: Maximum Ambient Temperature: 104°F
- :: 5-year warranty
- :: UL-listed
- :: Energy Star certified
- :: Adjustable bracket can fit in 5" and 6" housings (RDL6)




























Includes medium base E-26 screw-in adapter that fits any standard incandescent downlight



# LED DOWNLIGHTS (ADJUSTABLE)-4" & 5"/6" ROUND

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	DIAMETER
RDL4-ADJ-27K	10W	2700K	650LM	
RDL4-ADJ-30K	10W	3000K	650LM	A"
RDL4-ADJ-41K	10W	4100K	650LM	4
RDL4-ADJ-50K	10W	5000K	650LM	
RDL6-ADJ-27K	13W	2700K	900LM	
RDL6-ADJ-30K	13W	3000K	900LM	E" /C"
RDL6-ADJ-41K	13W	4100K	900LM	<b>J</b> / <b>b</b>
RDL6-ADJ-50K	13W	5000K	900LM	

# RSL4 & SSL4







Optional Round Trims Fit Over the Fixture



Optional Square Trims Fit Over the Fixture



BK ORB CU BZ BN CH

## **TECHNICAL SPECIFICATIONS:**

- :: Die-cast aluminum with white powder coat finish
- :: Pot light housing is not required even for insulated ceilings
- :: Optics: White translucent acrylic lens
- :: Lens: 0.125" white translucent acrylic
- :: Type IC rated Approved for direct contact with insulation
- :: CRI: >80
- :: Working voltage: 120V AC :: Beam Spread: 100-110°
- :: Dimmable
- :: Power factor: 90% +
- :: Air-tight and damp location approved
- :: Maximum Ambient Temperature: -4°F~104°F
- :: Rated Life: 50,000 hrs, 5-year warranty
- :: ETL-listed
- :: Energy Star certified





















**E5** 



SSL4-RI





## LED ULTRA SLIM RECESSED LIGHTS

CATALOG N	0.	MATTC	COLOR TEMP	LUMENC	DIAMETER
ROUND	SQUARE	WATTS	COLOR TEMP	LUMENS	DIAMETER
RSL4-27K	SSL4-27K	9W	2700K	630LM	
RSL4-30K	SSL4-30K	9W	3000K	630LM	
RSL4-40K	SSL4-40K	9W	4000K	650LM	. 11
RSL4-50K	SSL4-50K	9W	5000K	650LM	4
RSL4-30K-BN*	-	9W	3000K	630LM	
RSL4-30K-ORB**	-	9W	3000K	630LM	
RSL4-MCT	SSL4-MCT***	9W	3000K/4000K/5000K	675LM~720LM	
RSL4-RI	-		4" Round Rough-in Plate, 2	6" Long	
SSL4-RI			4" Square Rough-in Plate, 2	26" Long	
RSL4-TRM-BK	SSL4-TRM-BK		4" Black Clip-on Trim		
RSL4-TRM-ORB	SSL4-TRM-ORB		4" Oil-Rubbed Bronze Clip-	on Trim	- 11
RSL4-TRM-CU	SSL4-TRM-CU		4" Copper Clip-on Trim		<b>/</b> "
RSL4-TRM-BZ	SSL4-TRM-BZ	4" Bronze Clip-on Trim			4
RSL4-TRM-BN	SSL4-TRM-BN		4" Brushed Nickel Clip-on T	rim	
RSL4-TRM-CH	SSL4-TRM-CH		4" Chrome Clip-on Trim		

# RSL 4-ADJ





RSL4-APD Adjustable Pull-Down

## **TECHNICAL SPECIFICATIONS:**

- :: Die-cast aluminum with white powder coat finish
- :: Pot light housing is not required even for insulated ceilings
- :: Optics: White translucent acrylic lens :: Lens: 0.125" white translucent acrylic
- :: Type IC rated Approved for direct contact with insulation
- :: CRI: >80
- :: Working voltage: 120V AC :: Beam Spread: 100-110°
- :: Dimmable
- :: Power factor: 90% +
- :: Air-tight and damp location approved
- :: Maximum Ambient Temperature: -4°F~104°F
- :: Rated Life: 50,000 hrs, 5-year warranty
- :: ETL-listed
- :: Energy Star certified



















## LED ADJUSTABLE ULTRA SLIM RECESSED LIGHTS

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	DIAMETER
RSL4-ADJ-27K	9W	2700K	700LM	
RSL4-ADJ-30K	9W	3000K	700LM	
RSL4-ADJ-40K	9W	4000K	700LM	
RSL4-ADJ-50K	9W	5000K	700LM	
RSL4-ADJ-MCT	9W	3000K/4000K/5000	700LM	Λ"
RSL4-APD-27K	12W	2700K	700LM	4
RSL4-APD-30K	12W	3000K	700LM	
RSL4-APD-40K	12W	4000K	700LM	
RSL4-APD-50K	12W	5000K	700LM	
RSL4-APD-MCT	12W	3000K/4000K/5000K	700LM	


# RSL6 & SSL6





Optional Round Trims Fit Over the Fixture

BK ORB CU BZ BN CH





BK ORB CU BZ BN CH

## **TECHNICAL SPECIFICATIONS:**

- :: Die-cast aluminum with white powder coat finish
- :: Pot light housing is not required even for insulated ceilings
- :: Optics: White translucent acrylic lens :: Lens: 0.125" white translucent acrylic
- :: Type IC rated Approved for direct contact with insulation
- :: Working voltage: 120V AC
- :: Beam Spread: 100-110°
- :: Dimmable
- :: Power factor: 90% +
- :: Air-tight and damp location approved
- :: Maximum Ambient Temperature: -4°F~104°F
- :: Rated Life: 50,000 hrs, 5-year warranty
- :: ETL-listed
- :: Energy Star certified



























## LED ULTRA SLIM RECESSED LIGHTS

CATALOG N	10.	MATTE	COLOR TEMP	LUMENC	DIAMETER
ROUND	SQUARE	WATTS	COLOR TEMP	LUMENS	DIAMETER
RSL6-27K	SSL6-27K	15W	2700K	1125LM	
RSL6-30K	SSL6-30K	15W	3000K	1125LM	
RSL6-40K	SSL6-40K	15W	4000K	1125LM	OII
RSL6-50K	SSL6-50K	15W	5000K	1125LM	ı h
RSL6-30K-BN*	-	15W	3000K	1125LM	
RSL6-30K-ORB**	-	15W	3000K	1125LM	
RSL6-MCT	SSL6-MCT***	15W	3000K/4000K/5000K	1125LM~1200LM	_
RSL6-RI	-		6" Round Rough-in Plate, 20	6" Long	
RSL6-RI-13			6" Round Rough-in Plate, 13	3" Long	
SSL6-RI			6" Square Rough-in Plate, 2	6" Long	
RSL6-TRM-BK	SSL6-TRM-BK		6" Black Clip-on Trim		
RSL6-TRM-ORB	SSL6-TRM-ORB		6" Oil-Rubbed Bronze Clip-o	on Trim	
RSL6-TRM-CU	SSL6-TRM-CU		6" Copper Clip-on Trim		G"
RSL6-TRM-BZ	SSL6-TRM-BZ		6" Bronze Clip-on Trim		U
RSL6-TRM-BN	SSL6-TRM-BN		6" Brushed Nickel Clip-on T	rim	
RSL6-TRM-CH	SSL6-TRM-CH		6" Chrome Clip-on Trim		
* Brushed Nickel F	inish ** Oil-Rubbe	ed Bronze Finish	*** with Color Temperature Swit	tch	

**E7** 

# RSL6-ADJ



## **TECHNICAL SPECIFICATIONS:**

- :: Die-cast aluminum with white powder coat finish
- :: Pot light housing is not required even for insulated ceilings
- :: Optics: White translucent acrylic lens
- :: Lens: 0.125" white translucent acrylic
- :: Type IC rated Approved for direct contact with insulation
- :: CRI: >80
- :: Working voltage: 120V AC
- :: Beam Spread: 100-110°
- :: Dimmable
- :: Power factor: 90% +
- :: Air-tight and damp location approved
- :: Maximum Ambient Temperature: -4°F~104°F
- :: Rated Life: 50,000 hrs, 5-year warranty
- :: ETL-listed
- :: Energy Star certified




















## LED ADJUSTABLE ULTRA SLIM RECESSED LIGHTS

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	DIAMETER
RSL6-ADJ-27K	12W	2700K	900LM	
RSL6-ADJ-30K	12W	3000K	900LM	011
RSL6-ADJ-40K	12W	4000K	900LM	6
RSL6-ADJ-50K	12W	5000K	900LM	U
RSL6-ADJ-MCT	12W	3000K/4000K/5000K	900LM	

# RSL3



## TECHNICAL SPECIFICATIONS:

- :: Die-cast aluminum with white powder coat finish
- :: Pot light housing is not required even for insulated ceilings
- :: Optics: White translucent acrylic lens
- :: Lens: 0.125" white translucent acrylic
- :: Type IC rated Approved for direct contact with insulation
- :: CRI: >80
- :: Working voltage: 120V AC
- :: Beam Spread: 100-110°
- :: Dimmable
- :: Power factor: 90% +
- :: Air-tight and damp location approved
- :: Maximum Ambient Temperature: -4°F~104°F
- :: Rated Life: 50,000 hrs, 5-year warranty
- :: ETL-listed
- :: Energy Star certified



















Optional 10 Ft. Extension Cable for use with all Slim Lights










# LED ULTRA SLIM RECESSED LIGHTS

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	DIAMETER
RSL3-27K	6W	2700K	400LM	
RSL3-30K	6W	3000K	400LM	
RSL3-30K-BN (Brushed Nickel)	6W	3000K	400LM	- 11
RSL3-30K-ORB (Oil-Rubbed Bronze)	6W	3000K	400LM	3
RSL3-40K	6W	4000K	420LM	J
RSL3-50K	6W	5000K	420LM	
RSL3-MCT	6W	3000K/4000K/5000K	420LM	
RSL3-RI 3" Round Rough-in Plate, 26" Long				
RSL-EXT-10FT	10 Ft. Extension Cable for use with all Slim Lights			

# **RSL8 & RSL12**

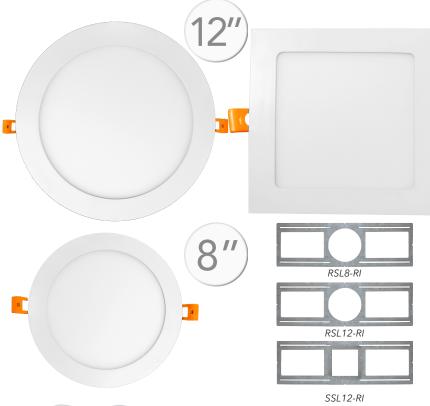



- :: Die-cast aluminum with white powder coat finish
- :: Pot light housing is not required even for insulated ceilings
- :: Optics: White translucent acrylic lens
- :: Lens: 0.125" white translucent acrylic
- :: Type IC rated Approved for direct contact with insulation
- :: CRI: >80
- :: Working voltage: 120V AC
- :: Beam Spread: 100-110°
- :: Dimmable
- :: Power factor: 90% +
- :: Air-tight and damp location approved
- :: Maximum Ambient Temperature: -4°F~104°F
- :: Rated Life: 50,000 hrs, 5-year warranty
- :: ETL-listed
- :: Energy Star certified

























# LED ULTRA SLIM RECESSED LIGHTS

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	DIAMETER
RSL8-30K	18W	3000K	1300LM	
RSL8-40K	18W	4000K	1300LM	0"
RSL8-50K	18W	5000K	1300LM	0
RSL8-MCT	18W	3000K/4000K/5000K	1300LM	
RSL12-30K	28W	3000K	2100LM	
RSL12-40K	28W	4000K	2100LM	19"
RSL12-50K	28W	5000K	2100LM	
RSL12-MCT	28W	3000K/4000K/5000K	2100LM	
SSL12-30K	24W	3000K	1800LM	
SSL12-40K	24W	4000K	1800LM	19"
SSL12-50K	24W	5000K	1800LM	
SSL12-MCT	24W	3000K/4000K/5000K	1800LM	
RSL8-RI		8" Round Rough-in Plate, 26" Lo	ong	
RSL12-RI		12" Round Rough-in Plate, 26" L	ong	
SSL12-RI		12" Square Rough-in Plate, 26" L	ong	
RSL-EXT-10FT	10 F	t. Extension Cable for use with all S	Slim Lights	

# RDL2S-BF SDL2S-BF



## TECHNICAL SPECIFICATIONS:

- :: Die-cast aluminum with white powder coat finish
- :: Can rotate after installation to align
- :: CRI: 90
- :: Working voltage: 120V AC
- :: Dimmable down to 10% using a standard TRIAC LED
- :: Power factor: 90% +
- :: Suitable for damp locations
- :: Maximum Ambient Temperature: 104°F
- :: 5-year warranty
- :: ETL-listed
- :: Energy Star certified



























# LED DOWNLIGHTS (BAFFLE TRIM)—2" ROUND & SQUARE

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	DIAMETER
RDL2S-BF-27K-WH	8W	2700K	600LM	
RDL2S-BF-30K-WH	8W	3000K	600LM	つ"
RDL2S-BF-40K-WH	8W	4000K	600LM	_
RDL2S-BF-50K-WH	8W	5000K	600LM	
SDL2S-BF-27K-WH	8W	2700K	600LM	
SDL2S-BF-30K-WH	8W	3000K	600LM	<b>1</b> 2" V 2"
SDL2S-BF-40K-WH	8W	4000K	600LM	Z X Z
SDL2S-BF-50K-WH	8W	5000K	600LM	
RSL3-RI	3	" Round Rough-in Plate, 26" Long		

# RDL3S-ADJ SDL3S-ADJ



## TECHNICAL SPECIFICATIONS:

- :: Die-cast aluminum with white powder coat finish
- :: Can rotate after installation to align
- :: CRI: 90
- :: Working voltage: 120V AC
- :: Dimmable down to 10% using a standard TRIAC LED
- :: Power factor: 90% +
- :: Suitable for damp locations
- :: Maximum Ambient Temperature: 104°F
- :: 5-year warranty
- :: ETL-listed
- :: Energy Star certified



























# LED DOWNLIGHTS (ADJUSTABLE)—3" ROUND & SQUARE

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	DIAMETER
RDL3S-ADJ-27K-WH	8W	2700K	600LM	
RDL3S-ADJ-30K-WH	8W	3000K	600LM	<b>o</b> "
RDL3S-ADJ-40K-WH	8W	4000K	600LM	J
RDL3S-ADJ-50K-WH	8W	5000K	600LM	
SDL3S-ADJ-27K-WH	8W	2700K	600LM	
SDL3S-ADJ-30K-WH	8W	3000K	600LM	2" V 2"
SDL3S-ADJ-40K-WH	8W	4000K	600LM	3 X 3
SDL3S-ADJ-50K-WH	8W	5000K	600LM	
RSL3-RI	3	3" Round Rough-in Plate, 26" Long		

# LRD-TL TRIMLESS RECESSED



## **TECHNICAL SPECIFICATIONS:**

- :: Die-cast aluminum with white powder coat finish
- :: CRI: 90
- :: Working voltage: 120V AC
- :: Lumens: 700LM
- :: Beam Angle: 30°
- :: Dimmable down to 10% using a standard TRIAC LED dimmer
- :: Power factor: 90% +
- :: Suitable for damp locations
- :: Maximum Ambient Temperature: 104°F
- :: 5-year warranty
- :: ETL-listed
- :: Energy Star certified



















# LED TRIMLESS RECESSED LIGHTS - 4"

CATALOG NO.	SHAPE	WATTAGE	COLOR TE	MPERATURES		TRIM FINISH
LRD-TL	R ROUND	10W 10W	27K	2700K	WH	WHITE
	S SQUARE		30K	3000K	ВК	BLACK
			35K	3500K	C	CLEAR
			40K	4000K	MG	MATTE GOLD
			50K	5000K	HZ	MATTE SILVER
	SAMPLE ORDERING:					

LRD-TL-S-10W-40K-BK

**TECHNICAL SPECIFICATIONS:** 

:: Die-cast aluminum with white powder

:: Lumens: 700LM (10W), 500LM (7W) :: Beam Angle: 10° (pin hole & slot trims)

:: Working voltage: 120V AC

24° (open trims)

# LRD **WINGED RECESSED**
















coat finish :: CRI: 90











White









Black on Black















Black

## **Slot**







Black

Junction box included with fixtures

# LED WINGED RECESSED LIGHTS - 3"

CATALOG NO. LRD

WATTAGE 7W 7W 10W 10W

**SAMPLE ORDERING:** 

COLOR TEMPERATURES 2700K 27K 30K 3000K 35K 3500K 40K 4000K 50K 5000K

WTR WTRPH WTRSL

TRIM (ADJUSTBLE) **OPEN TRIM** PIN HOLE TRIM SLOT TRIM

TRIM FINISH WH WHITE (ALL TRIMS) BK **BLACK (ALL TRIMS)** ABK

**BLACK ON BALCK (OPEN TRIMS ONLY) CLEAR (OPEN TRIMS ONLY)** MG MATTE GOLD (OPEN TRIMS ONLY)

ΗZ MATTE SILVER (OPEN TRIMS ONLY)

LRD-7W-30K-WTR-MG



# SDL-BF









## TECHNICAL SPECIFICATIONS:

- :: Die-cast aluminum with white powder coat finish
- :: Can rotate after installation to align
- :: Optics: White translucent acrylic lens
- :: Lens: 0.125" white translucent acrylic
- :: CRI: 90
- :: Working voltage: 120V AC
- :: Dimmable down to 10% using a standard TRIAC LED dimmer
- :: Power factor: 90% +
- :: Suitable for damp locations when gasket is used
- :: Maximum Ambient Temperature: 104°F
- :: 5-year warranty
- :: ETL-listed
- :: Energy Star certified























E-26 screw-in adapter that fits any standard incandescent downlight

# LED DOWNLIGHTS (BAFFLE TRIM)-4" & 6" SQUARE

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	DIAMETER
SDL4-BF-27K	10W	2700K	600LM	
SDL4-BF-30K	10W	3000K	650LM	<b>■</b> Λ"∨Λ"
SDL4-BF-41K	10W	4000K	700LM	4 A 4
SDL4-BF-50K	10W	5000K	700LM	
SDL6-BF-27K	16.5W	2700K	1073LM	
SDL6-BF-30K	16.5W	3000K	1100LM	C"VC"
SDL6-BF-41K	16.5W	4000K	1150LM	O X O
SDL6-BF-50K	16.5W	5000K	1200LM	
GU24		Optional Molex GU24 connect	or	

# DLS

## **TECHNICAL SPECIFICATIONS:**

- :: Construction: Die-cast aluminum
- :: LED: Unique DOB (Driver On Board) LED board enclosed in clear plastic casing for better damp location
- :: Gasket: closed cell Neoprene foam gasket
- :: Lens: White translucent acrylic
- :: CRI: 90
- :: Working Voltage: 120V AC
- :: Dimmable down to 10% using a standard TRIAC LED dimmer
- :: Power factor: 90% +
- :: Suitable for damp locations
- :: Maximum Ambient Temperature: 104°F
- :: 5-year warranty
- :: ETL-listed
- :: Energy Star certified
- :: Fits on 4" Octagonal (40) or 3" Octagonal (30) electrical

























for DLS4 for DLS6 Recessed mounting kit included for installation over recessed housings.

# LED DISK LIGHTS -4" & 5"/6" ROUND

CATALOG NO.	FINISH	WATTS	COLOR TEMP	LUMENS	DIAMETER
DLS4-27K	WHITE	9W	2700K	550~600LM	- 11
DLS4-30K	WHITE	9W	3000K	550~600LM	/ / · · ·
DLS4-41K	WHITE	9W	4000K	550~600LM	4
DLS4-50K	WHITE	9W	5000K	550~600LM	
DLS6-27K	WHITE	15W	2700K	950~1000LM	
DLS6-30K	WHITE	15W	3000K	950~1000LM	
DLS6-41K	WHITE	15W	4000K	950~1000LM	5"/G"
DLS6-50K	WHITE	15W	5000K	950~1000LM	<b>J</b> / <b>D</b>
DLS6-30K-BR	BRONZE	15W	3000K	950~1000LM	_
DLS6-30K-BN	BRUSHED NICKEL	15W	3000K	950~1000LM	

# DLSN



## TECHNICAL SPECIFICATIONS:

- :: Construction: Spun steel, powder-coated
- :: LED: Unique DOB (Driver On Board) LED board enclosed in clear plastic casing for better damp location performance
- :: Gasket: closed cell Neoprene foam gasket
- :: Lens: White translucent acrylic
- :: CRI: 90
- :: Working Voltage: 120V AC
- :: Dimmable down to 10% using a standard TRIAC LED
- :: Surface mounting bracket included
- :: Power factor: 90% +
- :: Suitable for damp locations
- :: Maximum Ambient Temperature: 104°F
- :: 5-year warranty
- :: ETL-listed
- :: Energy Star certified
- :: Fits on 4" Octagonal (40) or 3" Octagonal (30) electrical boxes























# LED DISK LIGHTS -4" & 5"/6" ROUND

CATALOG NO.	FINISH	WATTS	COLOR TEMP	LUMENS	DIAMETER
DLSN4-27K	WHITE	10W	2700K	600LM	
DLSN4-30K	WHITE	10W	3000K	600LM	/\"
DLSN4-41K	WHITE	10W	4000K	600LM	4
DLSN4-50K	WHITE	10W	5000K	600LM	
DLSN6-27K	WHITE	15W	2700K	1000LM	
DLSN6-30K	WHITE	15W	3000K	1000LM	
DLSN6-41K	WHITE	15W	4000K	1000LM	E" /C"
DLSN6-50K	WHITE	15W	5000K	1000LM	_ 5 / b
DLSN6-MCT-BR	BRONZE	15W	3000K/4000K/5000K	1000LM	_
DLSN6-MCT-BN	BRUSHED NICKEL	15W	3000K/4000K/5000K	1000LM	
DLSN6-MCT	WHITE	15W	3000K/4000K/5000K	1000LM	

# **STG** 24 FT. 12 LED LAMPS



## **TECHNICAL SPECIFICATIONS:**

- :: Westgate's linkable outdoor LED string lights
- :: 24 Ft. long, 12 lamps
- :: Lamp Base: E26 (Medium)
- :: Lamp type: LED S14 1.5W, 2700K, Clear
- :: 2 Spare lamps included
- :: Heavy duty 16/3 AWG cable
- :: Linkable, 1 Male and 1 female ends for chain connection
- :: Connect up to 18 sets end to end
- :: Check spec sheet for number of sets if original lamps are changed
- :: CRI: >70
- :: Light beam angle: 120°
- :: Wattage: 12W total
- :: Voltage: 120V
- :: Life span: 15,000 hrs.
- :: Suitable for Wet Locations, IP65
- :: 7-year warranty









## LED **STRING** LIGHTS WITH S14 BULBS

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	TOTAL LED	
STG-2412-27K	1.5W per bulb	75LM per S14 bulb	2700K	12	

# FCR & FCS MULTI COLOR TEMPERATURE



## **TECHNICAL SPECIFICATIONS:**

- :: Construction: Steel base with white powder coat finish
- :: Lens material: PMMA
- :: CRI: >80
- :: Voltage: 120V AC
- :: Direct replacement for fluorescent
- :: Dimmable down to 10% using a standard TRIAC LED dimmer
- :: Power factor: 90% +
- :: Suitable for damp locations
- :: Maximum Ambient Temperature: 104°F
- :: 5-year warranty
- :: ETL-listed
- :: Energy Star certified









## LED CLOUD FIXTURES

CATALOG NO.	SIZE	WATTS	COLOR TEMP	LUMENS	SHAPE
FCR-11-MCT	11" Diameter	13W	3000K/4000K/5000K	1100LM	DOLIND
FCR-14-MCT	14" Diameter	20W	3000K/4000K/5000K	1800LM	ROUND
FCS-11-MCT	11" Diameter	13W	3000K/4000K/5000K	1100LM	COLLABE
FCS-14-MCT	14" Diameter	20W	3000K/4000K/5000K	1800LM	SQUARE

## **FDL** MULTI COLOR TEMPERATURE



## **TECHNICAL SPECIFICATIONS:**

- :: Construction: Spun aluminum + steel (Brushed Nickel finish)
- :: Optics: White translucent acrylic lens
- :: CRI: >80
- :: Voltage: 120V AC
- :: Dimmable down to 10% using a standard TRIAC LED dimmer
- :: Power factor: 90% +
- :: Suitable for damp locations when gasket is used
- :: Maximum Ambient Temperature: 104°F
- :: 5-year warranty
- :: ETL-listed
- :: Energy Star certified




















Shown with Optional EM

## LED DRUM FIXTURES

CATALOG NO.	SIZE	WATTS	COLOR TEMP	LUMENS	SHAPE
FDL-12-MCT	12" Diameter	15W	3000K/4000K/5000K	1100LM	
FDL-14-MCT	14" Diameter	20W	3000K/4000K/5000K	1500LM	ROUND
FDL-16-MCT	16" Diameter	25W	3000K/4000K/5000K	1800LM	H= 3-1/2"
FDL-18-MCT	18" Diameter	30W	3000K/4000K/5000K	2200LM	

## **FML MULTI COLOR TEMPERATURE**



## Optional Round Trims Fit Over the Fixture



## **TECHNICAL SPECIFICATIONS:**

- :: Construction: Spun aluminum with white powder coat finish
- :: LED: Edge Lit LED Technology
- :: Optics: White translucent acrylic lens
- :: 1" deep
- :: CRI: >90
- :: Voltage: 120V AC
- :: Dimmable down to 10% using a standard TRIAC LED dimmer
- :: Power factor: 90% +
- :: Suitable for damp locations
- :: Maximum Ambient Temperature: 104°F
- :: 5-year warranty
- :: ETL-listed
- :: Energy Star-rated


















# LED FLUSH MOUNT FIXTURES

CATALOG NO.	SIZE	WATTS	COLOR TEMP	LUMENS	SHAPE			
FML-R6-MCT	6" Diameter	11W	3000K/4000K/5000K	660LM				
FML-R8-MCT	8" Diameter	14W	3000K/4000K/5000K	840LM				
FML-R10-MCT	10" Diameter	17W	3000K/4000K/5000K	1020LM				
FML-R14-MCT	14" Diameter	26W	3000K/4000K/5000K	1560LM	ROUND			
FML-R18-MCT	18" Diameter	30W	3000K/4000K/5000K	2100LM				
FML-R22-MCT	22" Diameter	45W	3000K/4000K/5000K	2700LM				
FML-R6-TRM-BK	6" Round Trim - Black Finish							
FML-R6-TRM-BR	6" Round Trim - Bronze Finish							
FML-R6-TRM-BN		6" R	ound Trim - Brushed-Nickel Finis	sh				
FML-R8-TRM-BK			8" Round Trim - Black Finish					
FML-R8-TRM-BR			8" Round Trim - Bronze Finish					
FML-R8-TRM-BN		8" Round Trim - Brushed-Nickel Finish						
FML-R10-TRM-BK			10" Round Trim - Black Finish					
FML-R10-TRM-BR	10" Round Trim - Bronze Finish							
FML-R10-TRM-BN		10" F	Round Trim - Brushed-Nickel Fini	sh				

# **LPL**





## TECHNICAL SPECIFICATIONS:

- :: Direct PL Lamp Replacement for fixtures with Electronic or Magnetic Ballasts
- :: Lumens: 800LM (9W) and 1200LM (12W)
- :: Magnetic-Ballast versions can also be connected to AC direct sockets with input voltage of 120-277V
- :: PF: 90% +
- :: CRI: >80
- :: Beam angle: 150°
- :: Lifespan: 50,000 Hours, about 50 times the life of average fluorescent PL lamps
- :: Non-dimmable
- :: Operating Temp: -4~+113°F
- :: 5-year warranty
- :: ETL listed

## **FEATURES:**

- :: Long life—reduced re-lamping cost
- :: Contains No Mercury
- :: Emits no UV/IR light









## LED PL LAMPS

CATALOG NO.	BALLAST	POSITION	FLUORESCENT REPLACEMENT	ROTATABLE	WATTS	COLOR TEMP	LUMENS	BASE
LPL-EB-9W-H-40K	Electronic with Ballast only	Horizontal	PL13	90°	9W	4000K	800LM	
LPL-EB-14W-H-L-40K	Electronic with Ballast only	Horizontal	PL18	90°	12W*	4000K	1200LM	G24q-2 G24q-3
LPL-EB-14W-V-40K	Electronic with Ballast only	Vertical	PL18	N/A	12W*	4000K	1200LM	GX24q-2   GX24q-3
LPL-MB-9W-H-40K	Magnetic or AC (Ballast override)	Horizontal	PL13	90°	9W	4000K	800LM	OX23 GX23-2
LPL-MB-14W-H-L-40K	Magnetic or AC (Ballast override)	Horizontal	PL18	90°	12W*	4000K	1200LM	u B u u B u
LPL-MB-14W-V-40K	Magnetic or AC (Ballast override)	Vertical	PL18	N/A	12W*	4000K	1200LM	G24d-2 G24d-3

\* Updated Wattages



# **MR16**







## **TECHNICAL SPECIFICATIONS:**

- :: Watts: 5W (400LM) & 7W (500LM)
- :: Input Voltage: 12V AC/DC :: Replaces 65W halogen
- :: CRI: >80
- :: Beam spread: 40°
- :: Base: GU5.3
- :: Life span: 25,000 hours
- :: Dimmable with magnetic ballast only
- :: ETL -listed
- :: Operates on both electronic or magnetic transformers
- :: Ideal for restaurants, retail stores, showrooms and residential applications. Especially suited for areas where accessing the fixture is costly.

## **FEATURES:**

- :: Compact design same size as halogen MR16 lamps
- :: Emits no UV/IR light
- :: 5-year warranty

















MR16-400L



## LED MR16 LAMPS

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	BEAM
MR16-400L-27K-D	5W	2700K	380LM	40°
MR16-400L-30K-D	5W	3000K	380LM	40°
MR16-400L-41K-D	5W	4100K	390LM	40°
MR16-400L-50K-D	5W	5000K	400LM	40°
MR16-500L-C90-30K-D	7W	3000K	500LM	40°
MR16-500L-C90-40K-D	7W	4000K	560LM	40°
MR16-500L-C90-50K-D	7W	5000K	560LM	40°

Dimmable with magnetic ballast only

# MR16-RGB











MR16-5W-RGB with remote

## **TECHNICAL SPECIFICATIONS:**

:: Get up to 20 different color variances using this RGB MR16. The light can also be dimmed using the remote control which is included in the package. You can also jump or fade 3 or 7 colors using the designated preset buttons.

## **FEATURES:**

- :: Ideal to spotlight places where a colorful torch is needed. Allows creative and modern showcasing of products and displays.
- :: Mercury lamp restarts to previous settings after power off.
- :: 5-year warranty







## MR16 RGB LAMP WITH REMOTE

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	VOLTAGE	BEAM ANGLE
MR16-5W-RGB	5W	RGB	280LM	12V	30°

# **MR11**





## TECHNICAL SPECIFICATIONS:

- :: Watts: 3W (250LM)
- :: Input Voltage: 12V AC/DC
- :: Replaces 65W halogen
- :: CRI: >80
- :: Beam spread: 36°
- :: Base: GU5.3
- :: Life span: 25,000 hours
- :: Operates on both electronic or magnetic
  - transformers
- :: Ideal for restaurants, retail stores, showrooms and residential applications. Especially suited for areas where accessing the fixture is costly.

## FEATURES:







- :: Compact design same size as halogen MR11 lamps
- :: Emits no UV/IR light
- :: 5-year warranty

## LED MR11 LAMPS

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	BEAM
MR11-250L-27K-D	3W	2700K	250LM	36°
MR11-250L-30K-D	3W	3000K	250LM	36°

# **A19**





## **TECHNICAL SPECIFICATIONS:**

:: Lumens: 800LM

:: Input Voltage: 120V AC/ 60Hz

:: PF: 90% + :: CRI: >90

:: Medium Base E26 :: Lifespan: 15,000 Hours

:: Dimmable using incandescent dimmers :: Dimension: 2-1/4" diameter, 4-1/2" height

:: Operating Temp: -4~+113°F

:: UL listed :: T24 Compliant

## **FEATURES:**

:: Long life—reduced re-lamping cost

:: Contains No Mercury :: Emits no UV/IR light

:: 5-year warranty






















# A19 LED LAMPS

CATALOG NO.		WATTS	COLOR TEMP	LUMENS	BEAM
A19-C90-8PK-800L-30K-D	8-PACK	9.5W	3000K	800LM	230°
A19-C90-8PK-800L-40K-D	ECONOMY	9.5W	4000K	800LM	230°
A19-C90-8PK-800L-50K-D	SERIES	9.5W	5000K	800LM	230°

# **A19**





## **TECHNICAL SPECIFICATIONS:**

:: Lumens: 700LM (3000K) and 810LM (4000K & 5000K)

:: Input Voltage: 120V AC/60Hz

:: PF: 90% + :: CRI: >80

:: Medium Base E26 :: Lifespan: 15,000 Hours

:: Dimmable using incandescent dimmers :: Dimension: 2-1/4" diameter, 4-1/2" height

:: Operating Temp: -4~+113°F

:: UL listed

## **FEATURES:**

:: Long life—reduced re-lamping cost

:: Contains No Mercury :: Emits no UV/IR light

:: 5-year warranty










D = 2-1/4"









# A19 LED LAMPS

CATALOG NO.		WATTS	COLOR TEMP	LUMENS	BEAM
A19-8PK-9W-30K-D	8-PACK	9W	3000K	700LM	240°
A19-8PK-9W-40K-D	ECONOMY	9W	4000K	810LM	240°
A19-8PK-9W-50K-D	SERIES	9W	5000K	810LM	240°
A19-40PK-9W-30K-D	40-PACK	9W	3000K	700LM	240°
A19-40PK-9W-40K-D	ECONOMY	9W	4000K	810LM	240°
A19-40PK-9W-50K-D	SERIES	9W	5000K	810LM	240°

**G10** 

## **120V**













## **TECHNICAL SPECIFICATIONS:**

- :: GU10 Base
- :: Watts: 7.5 watts
- :: Input Voltage: 120V 60Hz 65mA
- :: Lumens: 600LM
- :: PF: 0.9
- :: CRI: >83
- :: Beam angle: 30°
- :: Dimmable
- :: Dimension: 1.92" diameter, 2.125" height
- :: UL listed
- :: Power Factor: 9
- :: Suitable for damp locations

## **FEATURES:**

- :: Long life-reduced re-lamping cost
- :: Contains No Mercury
- :: Emits no UV/IR light
- :: 5-year warranty


















# HIGH POWER GU10

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	BEAM
G10-600L-30K-D	7.5W	3000K	600LM	300°
G10-600L-50K-D	7.5W	5000K	600LM	300°

# PAR36



## **TECHNICAL SPECIFICATIONS:**

:: Voltage: 12 Volts AC or DC

:: Lumens: 1000LM :: Watts: 12 watts :: PF: 90% + :: CRI: 90

:: COB

:: Aluminum housing :: Beam Angle: 36°

:: Base: GU53

:: Lifespan: 25,000 Hours

:: Dimmable

:: Operating Temp: -4~+113°F :: Suitable for wet locations

## **FEATURES:**

:: Long life—reduced re-lamping cost

:: Contains No Mercury

:: 5-year warranty















# PAR36 LED LAMPS


CATALOG NO.	WATTS	COLOR TEMP	LUMENS	BEAM
PAR36-12W-30K	12W	3000K	1000LM	36°
PAR36-12W-40K	12W	4000K	1000LM	36°
PAR36-12W-50K	12W	5000K	1000LM	36°

# E12-FLA









## **TECHNICAL SPECIFICATIONS:**

:: Voltage: 110-130V

:: Watts: 5W

:: Lumens: 300~400LM

:: Color Temp: 2700K and 4000K

:: CRI: >80

:: Beam Angle: 360° :: Base: E12 Candelabra :: Lifespan: 30,000 Hours :: Dimmable: 10-100% :: Power factor: 0.85

## **FEATURES:**

:: Long life—reduced re-lamping cost

:: Minimal housing base affords less light distortion

:: Contains no mercury :: Emits no UV/IR light

:: 5-year warranty












**E29** 



# LED CANDELABRA

CATALOG NO.	WATTS	COLOR TEMP	LENS	LUMENS	BEAM	DIMENSION
E12-FLA-5W-27K-D	4W	2700K	Clear	400LM	360°	1 1/2"/dia\ v 2 1/2"/U\
E12-FLA-5W-40K-D	4W	4000K	Clear	400LM	360°	1-1/2"(dia) x 3-1/2"(H)
E12-FLA-5W-27K-D-F-BT	4W	2700K	Frosted Inside	300LM	360°	1-1/4"(dia) x 3-1/4"(H)
E12-FLA-5W-40K-D-F-BT	4W	4000K	Frosted Inside	300LM	360°	1-1/4 (dla) x 3-1/4 (H)

# A19-FLA





## **TECHNICAL SPECIFICATIONS:**

:: Voltage: 120V :: Watts: 7W :: Lumens: 800LM :: CRI: >80

:: Beam Angle: 360°
:: Base: E26 Medium
:: Lifespan: 30,000 Hours
:: Dimmable: 10-100%
:: Dimension: 2-1/2" x 4-1/4"
:: Power factor: Ra>80
:: Clear glass finish

## **FEATURES:**

:: Long life—reduced re-lamping cost

:: Contains no mercury:: Emits no UV/IR light:: 5-year warranty
















# A19 LED FILAMENT BULB

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	BEAM	DIMENSION	
A19-FLA-7W-27K-D	7W	2700K	800LM	360°	2 1/2"/ 1:-\ 4 1/4"/11\	
A19-FLA-7W-40K-D	7W	4000K	800LM	360°	2-1/2"(dia) x 4-1/4"(H)	

# ST19-FLA



## **TECHNICAL SPECIFICATIONS:**

:: Voltage: 120V :: Watts: 5W

:: Lumens: 380-430LM

:: CRI: >80

:: Beam Angle: 360° :: Base: E26 Medium :: Lifespan: 30,000 Hours :: Dimmable: 10-100% :: Dimension: 2-1/2" x 4-1/4" :: Power factor: Ra>80

:: Clear & Amber glass finish

## FEATURES:

:: Long life—reduced re-lamping cost

:: Contains no mercury :: Emits no UV/IR light

:: 5-year warranty
















# **ST19** LED FILAMENT BULB

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	BEAM	DIMENSION	
ST19-FLA-5W-27K-D-CL	5W	2700K	430LM	360°	2 1/2"/4:0) 4 1/4"/11)	
ST19-FLA-5W-22K-D-AM	5W	2200K (LED Component 2700K)	380LM	360°	2-1/2"(dia) x 4-1/4"(H)	

GZ



## **TECHNICAL SPECIFICATIONS:**

- :: Replace existing halogen or incandescent lamps
- :: Increase life expectancy 15 to 20 times over halogen
- :: Improve efficiency by over 400%
- :: Save money by reducing transformer and wire size
- :: Reduce maintenance cost by 500%
- :: CRI 82
- :: Efficiency 60 + lumens per watt
- :: 5-year warranty











JC G4 base



GZ-S8-32K

(BA15s)







GZ-G4-9L-32K

JC G4 base





120V

JC G4 base

GZ-JC-60L-TFL

G9 base

## LED REPLACEMENT LAMPS

CATALOG NO.	WATTS	BASE	COLOR TEMP	LUMENS	VOLTAGE
GZ-JC-39L-27K	3W	JC G4	2700K	250LM	12V AC/DC
GZ-JC-39L-30K	3W	JC G4	3000K	250LM	12V AC/DC
GZ-JC-WP-3W-32K	3W	JC G4	3200K	180LM	12V AC/DC
GZ-S8-32K	1.4W	BA15s	3200K	70LM	12V DC
GZ-G4-9L-32K	2W	JC G4	3200K	120LM	12V DC
GZ-JC-60L-TFL	3W	JC G4	Turtle Friendly CCT	60LM	12V DC
GZ-JC-300L-27K	3W	JC G4	2700K	300LM	12V AC/DC
GZ-JC-300L-30K	3W	JC G4	3000K	300LM	12V AC/DC
GZ-G9-3W-32K	3W	G9	3200K	240LM	110~240V
GZ-G9-3W-55K	3W	G9	5500K	250LM	110~240V