



OUTDOOR LIGHTING CATALOG

Dark Sky Compliant Lighting

Full cutoff wall packs, shielded wall lights, flat-mount area and flood lights, roadway fixtures, and low-glare bollards that keep light on the ground and out of the night sky.

INSIDE

Dark sky and BUG ratings	2
Full cutoff wall packs	3
Shielded wall lights	8
Area and flood lights	13
Street and solar lights	20
Bollards	22

What dark sky **compliance** means

Dark sky lighting puts light where people need it and nowhere else. Ordinances usually measure that with a BUG rating, which scores how much light a fixture sends behind it, above it, and toward the eye at high angles.



B • BACKLIGHT

Light behind

Light that falls behind the fixture, toward a building or a neighbor's property. Lower is better near lot lines.

U • UPLIGHT

Light above

Light emitted above the horizontal plane. U0 means zero uplight, the core requirement for dark sky sites.

G • GLARE

Light in the eye

Light at high forward angles that drivers and pedestrians see as glare. Shields and cutoff optics lower it.

THREE WAYS TO GET THERE

Each series page notes which route the fixture takes. Scan its QR code for spec sheets and IES files with the exact BUG rating per configuration.

1 By optics

Full cutoff housings and flat lenses hold every lumen below horizontal. Wall packs and shielded wall lights.

2 By flat mounting

Area, flood, and roadway lights mounted at 90° to the pole with zero tilt, lens facing straight down.

3 With a shield

Shrouds and visors hide the LEDs and cut glare where a fixture has to be aimed, such as the LFX-PSR and LAX.

LWPX Full Cutoff Wall Pack

A low-profile wall pack for building perimeters, loading docks, and walkways. Wattage and color temperature are set in the field.



FULL CUTOFF WALL PACK

LWPX

KEY SPECS

Wattage	30 / 40 / 60 / 80W selectable
Lumens	Up to 10,050 lm
CCT	3000 / 4000 / 5000 / 5700K
Distribution	Type II, 80° x 100°
Dimming	0-10V
Sensor / photocell	Button photocell or motion sensor option
Finish	Dark Bronze or Black

APPLICATIONS

- Building perimeters
- Loading docks
- Doorways and entries
- Pathways and alleys

DARK SKY BY OPTICS

The flat lens faces straight down, so no light leaves above the horizontal plane. Mount level with the lens toward the ground.

FEATURES

UL LISTED

DLC LISTED

IP65

WET LOCATION

7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Mount level, lens facing down
- ✓ Set 3000K or warmer
- ✓ Add photocell or motion control



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/LWPX-SERIES

LWAX-P Gen 2 Adjustable Wall Pack

An adjustable-head wall pack for entries, alleys, loading docks, and pathways. Power and color temperature switches sit inside the fixture.



FULL CUTOFF WALL PACK

LWAX-P

KEY SPECS

Wattage	12W, or 15 / 20 / 30 / 50W selectable
Lumens	1,500 to 6,250 lm
CCT	3000 / 4000 / 5000 / 5700K
Distribution	Type II, 80° x 100°
Dimming	0-10V
Sensor / photocell	Pre-installed photocell
Finish	Bronze, White, or Black

APPLICATIONS

- Building perimeters
- Loading docks
- Doorways and entries
- Pathways and alleys

DARK SKY BY OPTICS

Full cutoff with the head at 0°, lens straight down. Never install it facing up on dark sky sites.

FEATURES

UL LISTED

DLC LISTED


IP65

ADJUSTABLE HEAD

7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Mount level, lens facing down
- ✓ Set 3000K or warmer
- ✓ Add photocell or motion control



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/LWAX-P-SERIES

WPMX Half-Moon Wall Pack

A half-moon wall pack for multi-family, hospitality, and schools. Power and color temperature switches sit inside the fixture.



FULL CUTOFF WALL PACK

WPMX

KEY SPECS

Wattage	24 / 32 / 40W selectable
Lumens	Up to 5,400 lm
CCT	3000 / 4000 / 5000K
Distribution	Downward forward throw
Dimming	0-10V
Sensor / photocell	Button photocell with on/off switch included
Finish	Dark Bronze

APPLICATIONS

- Building perimeters
 - Doorways and entries
- Loading docks
 - Pathways and alleys

DARK SKY BY OPTICS

The housing closes over the top and the lens points down, so the facade is lit without lighting the sky.

FEATURES

- ETL LISTED
- IP65
- WET LOCATION
- 7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ☒ Mount level, lens facing down
- ☒ Set 3000K or warmer
- ☒ Add photocell or motion control



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.
westgatemfg.com/product/WPMX-SERIES

WPCX Full Cutoff Wall Pack

A higher-output full cutoff wall pack for warehouses, distribution yards, and large building perimeters.



FULL CUTOFF WALL PACK

WPCX

KEY SPECS

Wattage	36 / 48 / 60W or 60 / 80 / 100W
Lumens	Up to 8,100 or 13,500 lm
CCT	3000 / 4000 / 5000K
Distribution	Selectable beam on MCTPB models
Dimming	0-10V
Sensor / photocell	Photocell included on MCTPB models
Finish	Bronze

APPLICATIONS

- Building perimeters
- Loading docks
- Doorways and entries
- Pathways and alleys

DARK SKY BY OPTICS

Even at full output, the cutoff housing holds every lumen below horizontal, so high wall mounts add no sky glow.

FEATURES

- IP65
- WET LOCATION
- BEAM SELECTABLE
- 7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Mount level, lens facing down
- ✓ Set 3000K or warmer
- ✓ Add photocell or motion control



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/WPCX-SERIES

LW360-PSR Rotatable Wall Pack

A wall pack with a rotating head and pre-installed photocell, in two sizes for doorways through tall warehouse walls.



FULL CUTOFF WALL PACK

LW360-PSR

KEY SPECS

Wattage	15-40W or 60-120W selectable
Lumens	See spec sheet
CCT	3000 / 4000 / 5000K
Distribution	Rotatable head
Dimming	See spec sheet
Sensor / photocell	Pre-installed photocell, sensor ready
Finish	Bronze, Black, Silver, or White

APPLICATIONS

- Building perimeters
 - Doorways and entries
- Loading docks
 - Pathways and alleys

DARK SKY BY OPTICS

Rotate the head so the lens faces straight down. Aimed at the ground, it sends no light above horizontal.

FEATURES

- ROTATABLE HEAD
- SENSOR READY
- 7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ☒ Mount level, lens facing down
- ☒ Set 3000K or warmer
- ☒ Add photocell or motion control



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/LW360-PSR-SERIES

LRS-MC Mini-Cone Wall Sconce

A compact 5-inch cone sconce for residential entries, patios, and storefront doors.



SHIELDED WALL LIGHT

LRS-MC

KEY SPECS

Wattage	10W
Lumens	700 lm
CCT	2700 / 3000 / 3500 / 4000 / 5000K
Distribution	90° x 110°
Dimming	TRIAC
Sensor / photocell	Photocell included
Finish	Black, White, Bronze, or Brushed Nickel

APPLICATIONS

- Entries and doorways
- Sign lighting
- Storefronts
- Patios and porches

DARK SKY BY SHIELDING

The cone shade closes over the top of the source and directs light downward onto the wall and doorway.

FEATURES

ETL LISTED

WET LOCATION

5-CCT SELECTABLE

7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Mount with the shade over the source
- ✓ Set 3000K or warmer
- ✓ Use the photocell for dusk to dawn



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/LRS-MC-SERIES

WLF 12-Inch Dome Light, Bell Arm

A 12-inch dome on a bell arm for doorways, entrances, and residential exteriors. Power and CCT switches sit inside the fixture.



SHIELDED WALL LIGHT

WLF

KEY SPECS

Wattage	24 / 32 / 40W selectable
Lumens	2,400 / 3,200 / 4,000 lm
CCT	3000 / 4000 / 5000K
Distribution	90° x 110°, flat glass lens
Dimming	Triac and 0-10V
Sensor / photocell	See spec sheet
Finish	Bronze, Black, or White

APPLICATIONS

- Entries and doorways
- Storefronts
- Sign lighting
- Patios and porches

DARK SKY BY SHIELDING

The flat lens sits flush inside the dome, so the source is hidden from the side and light goes down onto the wall and walk.

FEATURES

ETL LISTED

WET LOCATION

MCTP

7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Mount with the shade over the source
- ✓ Set 3000K or warmer
- ✓ Use the photocell for dusk to dawn



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/WLF-SERIES

SHIELDED WALL LIGHTS

WLF-HA 12-Inch Dome Light, Horizontal Arm

A 12-inch dome on a horizontal arm that reaches out from the wall over doorways, entrances, and pathways.



SHIELDED WALL LIGHT

WLF-HA

KEY SPECS

Wattage	24 / 32 / 40W selectable
Lumens	2,400 / 3,200 / 4,000 lm
CCT	3000 / 4000 / 5000K
Distribution	90° x 110°, BUG B2-U1-G1
Dimming	Triac and 0-10V
Sensor / photocell	See spec sheet
Finish	Black, White, or Bronze

APPLICATIONS

- Entries and doorways
- Storefronts
- Sign lighting
- Patios and porches

DARK SKY BY SHIELDING

The flat white glass lens faces down inside the dome. Rated B2-U1-G1: low, not zero, uplight.

FEATURES

ETL LISTED

WET LOCATION

MCTP

7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Mount with the shade over the source
- ✓ Set 3000K or warmer
- ✓ Use the photocell for dusk to dawn



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/WLF-SERIES

SHIELDED WALL LIGHTS

GNB Gooseneck Barn Light

A classic gooseneck barn light for signs, storefronts, and farmhouse facades.



SHIELDED WALL LIGHT

GNB

KEY SPECS

Wattage	25W or 40W
Lumens	3,000 or 4,800 lm
CCT	3000 / 4000 / 5000K
Distribution	Downward
Dimming	0-10V
Sensor / photocell	Bottom photocell included
Finish	Black, White, or Bronze

APPLICATIONS

- Entries and doorways
- Sign lighting
- Storefronts
- Patios and porches

DARK SKY BY SHIELDING

The deep shade covers the LED from above and the side, sending light down onto the wall and ground.

FEATURES

- ETL LISTED
- IP54
- WET LOCATION
- 7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Mount with the shade over the source
- ✓ Set 3000K or warmer
- ✓ Use the photocell for dusk to dawn



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.
westgatemfg.com/product/GNB-SERIES

GNBA Angled Gooseneck Barn Light

An 11-inch angled barn light that throws light forward for sign faces and wide entries.



SHIELDED WALL LIGHT

GNBA

KEY SPECS

Wattage	18 / 26 / 35W selectable
Lumens	Up to 5,250 lm
CCT	3000 / 4000 / 5000K
Distribution	103.5° beam
Dimming	0-10V
Sensor / photocell	Bottom photocell included
Finish	Black, White, Bronze, or Silver

APPLICATIONS

- Entries and doorways
- Storefronts
- Sign lighting
- Patios and porches

DARK SKY BY SHIELDING

The shade sits over the lens and angles the beam down and forward, keeping the source out of view from above.

FEATURES

- IP54
- WET LOCATION
- 150 LPW
- 7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Mount with the shade over the source
- ✓ Set 3000K or warmer
- ✓ Use the photocell for dusk to dawn



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.
westgatemfg.com/product/GNBA-SERIES

LFX-PSR Flood and Area Light

A power-adjustable flood and area light for pathways, parking lots, and truck yards, ready for dusk-to-dawn and occupancy control out of the box.



FLAT-MOUNT AREA LIGHT

LFX-PSR

KEY SPECS

Wattage	LG 80-150W, XL 200-300W, XXL 300-600W
Lumens	See spec sheet
CCT	3000 / 4000 / 5000K
Distribution	Type III
Dimming	0-10V
Sensor / photocell	Pre-installed photocell, sensor ready
Finish	Bronze

APPLICATIONS

- Parking lots
- Site lighting
- Campuses
- Perimeters

DARK SKY WHEN MOUNTED FLAT

Mount flat at 90° to the pole, lens straight down. If an XXL must be aimed, add the LF-SHROUD-G or -F glare shield.

FEATURES

DLC LISTED

CUL


IP65

10KV SURGE

7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Slip fitter or straight arm, 0° tilt
- ✓ Set 3000K or warmer
- ✓ Use a sensor to dim after hours



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/LFX-PSR-SERIES

LFXMAX Signature Area Light

A maximum-feature area light with adjustable beam, so one fixture can be tuned to a roadway, a lot edge, or an open plaza.



FLAT-MOUNT AREA LIGHT

LFXMAX

KEY SPECS

Wattage	70-150W or 200-300W selectable
Lumens	Up to 21,750 or 43,500 lm
CCT	3000 / 4000 / 5000K
Distribution	Adjustable beam
Dimming	0-10V
Sensor / photocell	Sensor and photocell ready
Finish	Bronze

APPLICATIONS

- Parking lots
- Site lighting
- Campuses
- Perimeters

DARK SKY WHEN MOUNTED FLAT

Mounted flat on a slip fitter, the lens points straight down. A forward-throw setting lights from a lot edge without spill behind the pole.

FEATURES

UL LISTED

DLC LISTED


IP65

10KV SURGE

7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Slip fitter or straight arm, 0° tilt
- ✓ Set 3000K or warmer
- ✓ Use a sensor to dim after hours



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/LFXMAX-MCTPB-SERIES

LAX Beam-Adjustable Area Light

An architectural area light at up to 170 lumens per watt for parking lots, retail centers, campuses, and roadways.



FLAT-MOUNT AREA LIGHT

LAX

KEY SPECS

Wattage	90 / 120 / 150W or 180-300W selectable
Lumens	Up to 25,500 lm (LG)
CCT	3000 / 4000 / 5000K
Distribution	Field-selectable Type II / III / IV / V
Dimming	0-10V
Sensor / photocell	Pre-installed photocell, sensor ready (7-pin NEMA)
Finish	Bronze or Black

APPLICATIONS

- Parking lots
- Site lighting
- Campuses
- Perimeters

DARK SKY WHEN MOUNTED FLAT

Mount level at 0° tilt for zero uplight. Add the LAX-SH1 shield for glare control near lot lines.

FEATURES

DLC PREMIUM

UL LISTED


170 LPW

480V OPTION

WET LOCATION

SPECIFY FOR DARK SKY

- ✓ Slip fitter or straight arm, 0° tilt
- ✓ Set 3000K or warmer
- ✓ Use a sensor to dim after hours



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/LAX-SERIES

GPX-A1 Post Disk Light, Single Arm

A low-profile disk on a single arm for park paths, campus walks, and pedestrian streets.



FLAT-MOUNT AREA LIGHT

GPX-A1

KEY SPECS

Wattage	18-150W selectable
Lumens	9,000 to 22,500 lm
CCT	3000 / 4000 / 5000K
Distribution	Type V, 150° x 150°
Dimming	0-10V
Sensor / photocell	Bi-level motion sensor and photocell options
Finish	Bronze or Black

APPLICATIONS

- Parking lots
- Site lighting
- Campuses
- Perimeters

DARK SKY WHEN MOUNTED FLAT


The flat disk hangs level from the arm and faces straight down, lighting the ground in a round pattern with no upward light.

FEATURES

- IP66
- 150 LPW
- EMERGENCY OPTION
- 7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Slip fitter or straight arm, 0° tilt
- ✓ Set 3000K or warmer
- ✓ Use a sensor to dim after hours



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/GPX-A-SERIES

GPX-A2 Post Disk Light, Twin Arm

Two disks on a twin arm from one pole, for wider walks, plazas, and drive aisles.



FLAT-MOUNT AREA LIGHT

GPX-A2

KEY SPECS

Wattage	18-150W selectable, per head
Lumens	9,000 to 22,500 lm per head
CCT	3000 / 4000 / 5000K
Distribution	Type V, 150° x 150°
Dimming	0-10V
Sensor / photocell	Bi-level motion sensor and photocell options
Finish	Bronze or Black

APPLICATIONS

- Parking lots
- Site lighting
- Campuses
- Perimeters

DARK SKY WHEN MOUNTED FLAT

Both disks hang level and face straight down, doubling coverage from one pole with no upward light.

FEATURES

- IP66
- 150 LPW
- EMERGENCY OPTION
- 7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Slip fitter or straight arm, 0° tilt
- ✓ Set 3000K or warmer
- ✓ Use a sensor to dim after hours



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/GPX-A-SERIES

GPX-Q Post Disk Light, Quad Arm

Four disks on a quad arm for open plazas, courtyards, and parking areas that need light in every direction.



FLAT-MOUNT AREA LIGHT

GPX-Q

KEY SPECS

Wattage	18-60W or 90-150W selectable, per head
Lumens	Up to 22,500 lm per head
CCT	3000 / 4000 / 5000K
Distribution	Type V, 150° x 150°
Dimming	0-10V
Sensor / photocell	Bi-level motion sensor and photocell options
Finish	Bronze or Black

APPLICATIONS

- Parking lots
- Site lighting
- Campuses
- Perimeters

DARK SKY WHEN MOUNTED FLAT

Each disk hangs level and faces straight down. Four heads cover a full circle around the pole with no upward light.

FEATURES

- IP66
- 150 LPW
- EMERGENCY OPTION
- 7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Slip fitter or straight arm, 0° tilt
- ✓ Set 3000K or warmer
- ✓ Use a sensor to dim after hours



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/GPX-Q-SERIES

DAB Designer Area Bell Light

A bell-shaped area light for town centers, campuses, and plazas that want a traditional look.



FLAT-MOUNT AREA LIGHT

DAB

KEY SPECS

Wattage	50-100W or 80-150W selectable
Lumens	13,000 to 19,500 lm
CCT	3000 / 4000 / 5000K
Distribution	Type V or Type III
Dimming	0-10V
Sensor / photocell	Zhaga socket, bi-level motion option
Finish	See spec sheet

APPLICATIONS

- Parking lots
- Site lighting
- Campuses
- Perimeters

DARK SKY WHEN MOUNTED FLAT

The bell shade sits over a downward lens, hiding the source from the side and holding light below the fixture.

FEATURES

- IP66
- 130 LPW
- EMERGENCY OPTION
- 7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Slip fitter or straight arm, 0° tilt
- ✓ Set 3000K or warmer
- ✓ Use a sensor to dim after hours



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/DAB-SERIES

STL4 Street and Roadway Light

A multi-power cobra head for streets, drives, and parking lots, in two sizes with 480V models.



ROADWAY LIGHT

STL4

KEY SPECS

Wattage	15-50W, 30-100W, 50-150W, or 80-200W
Lumens	Up to 28,000 lm
CCT	3000K or 5000K
Distribution	Type III
Dimming	0-10V
Sensor / photocell	NEMA twist-lock socket
Finish	Light Gray

APPLICATIONS

- Streets and drives
- Parking lots
- Roadway entrances
- Perimeters

DARK SKY WHEN MOUNTED LEVEL

Mount level on the arm with zero tilt. The Type III lens throws light along the road, with nothing above horizontal.

FEATURES

UL LISTED

IP65

10KV SURGE

480V OPTION

7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ✓ Mount level on the arm, 0° tilt
- ✓ Choose 3000K
- ✓ Dim late at night with controls



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/STL4-SERIES

SOLN Solar Street and Flood Light

An integrated solar street light for roads, lots, and perimeters with no trenching or wiring.



ROADWAY LIGHT

SOLN

KEY SPECS

Wattage	10 / 25 / 30 / 50 / 70W
Lumens	Up to 14,000 lm
CCT	3000K or 5000K
Distribution	Type III TIR
Dimming	Smart controller, remote set
Sensor / photocell	Dusk to dawn, built in
Finish	Light Gray

APPLICATIONS

- Streets and drives
- Parking lots
- Roadway entrances
- Perimeters

DARK SKY WHEN MOUNTED LEVEL

Mount level on the slip fitter. The Type III optic lights the roadway below, and the controller can dim late at night.

FEATURES

UL LISTED

ETL LISTED

IP65

OFF-GRID

LIFEPO4 BATTERY

SPECIFY FOR DARK SKY

- ✓ Mount level on the arm, 0° tilt
- ✓ Choose 3000K
- ✓ Dim late at night with controls



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/SOLN-SERIES

BOL-G4 Modular Bollard

A modular bollard system for walkways and plazas, with heads and shafts in multiple heights.



KEY SPECS

Wattage	See spec sheet
Lumens	See spec sheet
CCT	3000 / 4000 / 5000K
Distribution	360°
Dimming	See spec sheet
Sensor / photocell	See spec sheet
Finish	Bronze or Black

APPLICATIONS

- ☐ Walkways
- ☐ Building entrances
- ☐ Plazas and courtyards
- ☐ Landscapes

Low mounting height and a shielded head keep light on the path and below eye level.

FEATURES

MODULAR SYSTEM

MULTIPLE HEIGHTS

SPECIFY FOR DARK SKY

- ☒ Space evenly for path coverage
- ☒ Set 3000K or warmer
- ☒ Pair with a photocell or timer



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/BOL-G4-SERIES

BOL-G2-118 Modular Bollard G2

A configurable Generation 2 bollard for commercial walks, entries, and drives.



KEY SPECS

Wattage	14 / 19 / 24W selectable
Lumens	Up to 3,000 lm
CCT	3000 / 4000 / 5000K
Distribution	360°
Dimming	0-10V
Sensor / photocell	Photocell, sensor, emergency options
Finish	Bronze or Black

APPLICATIONS

- ☐ Walkways
- ☐ Building entrances
- ☐ Plazas and courtyards
- ☐ Landscapes

The top cap and internal reflector send light down and out across the path at low angles.

FEATURES

- CUL
- IP65
- MODULAR SYSTEM
- 7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ☒ Space evenly for path coverage
- ☒ Set 3000K or warmer
- ☒ Pair with a photocell or timer



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/BOL-G2-SERIES

BOL-G2-140 Modular Bollard G2

A G2 bollard configuration for walks, entries, and drives, sharing the series wattage and CCT switches.



KEY SPECS

Wattage	14 / 19 / 24W selectable
Lumens	Up to 3,000 lm
CCT	3000 / 4000 / 5000K
Distribution	360°
Dimming	0-10V
Sensor / photocell	Photocell, sensor, emergency options
Finish	Bronze or Black

APPLICATIONS

- ☐ Walkways
- ☐ Building entrances
- ☐ Plazas and courtyards
- ☐ Landscapes

The top cap and internal reflector send light down and out across the path at low angles.

FEATURES

- CUL
- IP65
- MODULAR SYSTEM
- 7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ☒ Space evenly for path coverage
- ☒ Set 3000K or warmer
- ☒ Pair with a photocell or timer



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/BOL-G2-SERIES

BOL-505 Round Path Bollard

A round path bollard in 26-inch and 40-inch heights for walkways and landscape edges.



KEY SPECS

Wattage	15W
Lumens	Up to 1,500 lm
CCT	3000 / 4000 / 5000K
Distribution	360°
Dimming	See spec sheet
Sensor / photocell	See spec sheet
Finish	Black or Bronze

APPLICATIONS

- ☐ Walkways
- ☐ Building entrances
- ☐ Plazas and courtyards
- ☐ Landscapes

Low mounting height and a covered top keep light near the ground and out of the sky.

FEATURES

IP65 WET LOCATION 7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ☒ Space evenly for path coverage
- ☒ Set 3000K or warmer
- ☒ Pair with a photocell or timer




SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/BOL-505-SERIES

BOL-700 Glare-Free Path Bollard

A glare-free bollard in 20-inch and 37-inch heights for paths, plazas, and landscapes.

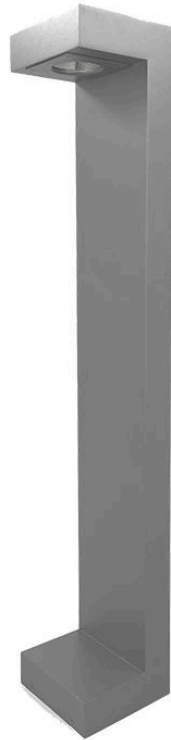

KEY SPECS

Wattage	6 / 12W or 10 / 15 / 20W
Lumens	Up to 2,000 lm
CCT	3000 / 4000 / 5000K
Distribution	270°
Dimming	See spec sheet
Sensor / photocell	See spec sheet
Finish	Black, Bronze, or Silver

APPLICATIONS

- ☐ Walkways
- ☐ Building entrances
- ☐ Plazas and courtyards
- ☐ Landscapes

The source is recessed and shielded, so walkers see the lit path, not the LED.

FEATURES

ETL LISTED


IP65

GLARE-FREE

7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ☒ Space evenly for path coverage
- ☒ Set 3000K or warmer
- ☒ Pair with a photocell or timer



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/BOL-700-SERIES

BOL-710 Reverse Light Bollard

An architectural reverse-light bollard, single or T-top dual head, for walks and courtyards.



KEY SPECS

Wattage	12 / 16 / 20W selectable
Lumens	Up to 2,000 lm
CCT	3000 / 4000 / 5000K
Distribution	270°, BUG B1-U1-G1
Dimming	0-10V
Sensor / photocell	See spec sheet
Finish	Bronze or Black

APPLICATIONS

- ☐ Walkways
- ☐ Building entrances
- ☐ Plazas and courtyards
- ☐ Landscapes

The reverse-light head aims light back down at the ground.
Rated B1-U1-G1: low, not zero, uplight.

FEATURES

- IP65
- WET LOCATION
- 70,000 HR LIFE
- 7-YEAR WARRANTY

SPECIFY FOR DARK SKY

- ☒ Space evenly for path coverage
- ☒ Set 3000K or warmer
- ☒ Pair with a photocell or timer



SCAN FOR THE SERIES PAGE

Spec sheets, IES files, accessories, and where to buy.

westgatemfg.com/product/BOL-710-SERIES

LIGHT THE GROUND, NOT THE SKY

Specify with confidence

Free photometric layouts, spec sheets, and IES files for every series in this catalog. Our lighting team can help you meet local dark sky ordinances from takeoff through installation.

PHONE

877.805.2252

WEB

westgatemfg.com

LIGHTING DESIGN

westgatemfg.com/lighting-design

ADDRESS

2462 E. 28th Street, Vernon, CA 90058

REQUEST A LAYOUT

Scan to start a project

