




LED EXIT & EMERGENCY LIGHTING | COMBINATION DIECAST ALUMINUM

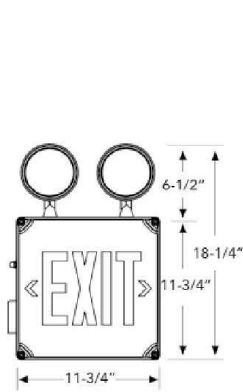

TECHNICAL SPECIFICATIONS:

- :: High-impact thermo-plastic LED exit and emergency light
- :: Even illumination across the face without LED imaging
- :: Energy-efficient LED panel, 3.2 watts (Red) 3.8 watts (Green), 25-year rated
- :: Two fully adjustable 5.4 watts incandescent, glare-free heads for safe egress
- :: 120/277 volt operation (20-40°C)
- :: Top canopy included for ceiling installation
- :: EZ snap-out left or right arrow knock outs
- :: 6V maintenance-free sealed Ni-Cad rechargeable battery for long life
- :: Low profile compact design, available in white or black housing
- :: 90-minute rated with push style test switch and red indicator light
- :: Universal exit: single or double face – wall (back) or ceiling mount
- :: Mounting accessories included
- :: ETL-listed for wet locations, meets UL924, NFPA 101 Life Safety Code

WET LOCATION COMBINATION EXIT SIGN & EMERGENCY

CATALOG NO.	LETTERS	NUMBER OF FACEPLATE	FACEPLATE	VOLTAGE	BATTERY	CUSTOMIZE
XT-CWP-RG-EM	Red	Universal Single/Double	Gray	120/277	Ni-Cad	Black housing
XT-CWP-GG-EM	Green	Universal Single/Double	Gray	120/277	Ni-Cad	Black housing



TECHNICAL SPECIFICATIONS:

- :: High-impact die-cast aluminum LED exit and emergency light
- :: Even illumination across the face without LED imaging
- :: Energy-efficient LED panel, 3.2 watts (Red) 3.8 watts (Green), 25-year rated
- :: Two fully adjustable 3-watt LED, glare-free heads for safe egress
- :: 120/277 volt operation (20-40°C)
- :: Top canopy included for ceiling installation
- :: EZ snap-out left or right arrow knock outs
- :: 8.4V maintenance-free sealed Ni-Cad rechargeable battery for long life
- :: Low profile compact design, available in white or black housing
- :: 90-minute rated with push style test switch and red indicator light
- :: Universal exit: single or double face – wall (back) or ceiling mount
- :: Mounting accessories included
- :: UL-listed for damp locations, meets UL924, NFPA 101

G12

COMBINATION DIECAST ALUMINUM

WET LOCATION COMBINATION EXIT SIGN & EMERGENCY

CATALOG NO.	LETTERS	NUMBER OF FACEPLATE	HOUSING COLOR	OPTIONS	
CWLEZXTE	R Red	1 Single Face	W White	TP Tamper Proof Screws CUSTOM Custom Wording	
	G Green	2 Double Face	B Black		CW Cold Weather
			G Gray (with white face plate)		RC Remote Capacity SDT Self Diagnostics



WWW.WESTGATEMFG.COM TOLL FREE: 877.805.2252 FAX: 877.809.2252

WESTGATE MFG

179

