


# LED EXIT & EMERGENCY LIGHTING | DIECAST LED EXIT SIGN



### TECHNICAL SPECIFICATIONS:

- :: Dual 120/277 voltage
- :: Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing
- :: 2.4V long life, maintenance-free, rechargeable NiCd battery
- :: Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- :: Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours

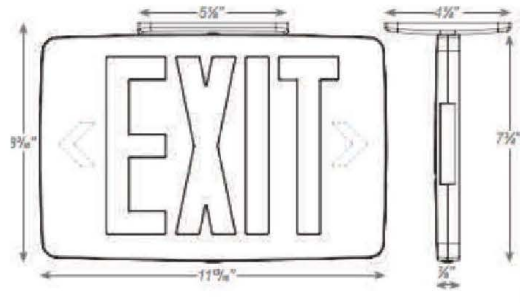

## THIN DIECAST LED EXIT SIGN

CATALOG NO.	LETTERS	FACEPLATE	BODY	VOLTAGE	BATTERY
<b>XD-TH-1GAAEM</b>	Green	Single Face Aluminum	Aluminum	120/277	Battery backup
<b>XD-TH-1GBBEM</b>	Green	Single Face Black	Black	120/277	Battery backup
<b>XD-TH-1GWWEM</b>	Green	Single Face White	White	120/277	Battery backup
<b>XD-TH-1RAAEM</b>	Red	Single Face Aluminum	Aluminum	120/277	Battery backup
<b>XD-TH-1RBBEM</b>	Red	Single Face Black	Black	120/277	Battery backup
<b>XD-TH-1RWWEM</b>	Red	Single Face White	White	120/277	Battery backup
<b>XD-TH-2GAAEM</b>	Green	Double Face Aluminum	Aluminum	120/277	Battery backup
<b>XD-TH-2GBBEM</b>	Green	Double Face Black	Black	120/277	Battery backup
<b>XD-TH-2GWWEM</b>	Green	Double Face White	White	120/277	Battery backup
<b>XD-TH-2RAAEM</b>	Red	Double Face Aluminum	Aluminum	120/277	Battery backup
<b>XD-TH-2RBBEM</b>	Red	Double Face Black	Black	120/277	Battery backup
<b>XD-TH-2RWWEM</b>	Red	Double Face White	White	120/277	Battery backup

G10

DIECAST LED EXIT SIGN

