


LED DIMMABLE MAGNETIC DC DRIVERS



20-WATT THRU 50-WATT



50-WATT THRU 300-WATT

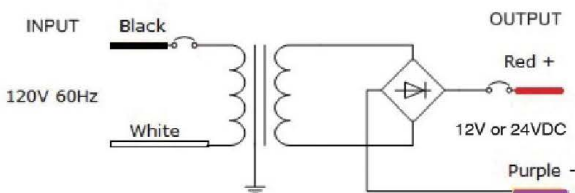

TECHNICAL SPECIFICATIONS:

- :: Material: black powder-coated steel enclosure
- :: Dimmable with most low-voltage magnetic dimmers (Dimmer minimum load must be met.)
- :: Confirms to UL standard 1310 class 2 wiring
- :: Primary and secondary auto-reset breaker
- :: Input leads 18 AWG
- :: Output leads 14 AWG
- :: Leads maximum operating temperature 105 centigrade
- :: Enclosure temperature does not exceed 65 at 45 ambient when fully-loaded.
- :: Wiring compartment has (2) 1/2" knockouts.

FEATURES:

- :: Compact design allows for installation in low profile applications.
- :: Ideal for hard wired applications or when full range dimming is required.
- :: Encapsulated with polyester resin for whisper-quiet operation.

12-VOLT

LED DIMMABLE MAGNETIC DRIVERS

CATALOG NO.	MAX WATTAGE	OPERATING VOLTAGE		SELF-RESET		DIMENSIONS
		INPUT	OUTPUT	PRIMARY	SECONDARY	
UCM20L12DC	20W max	120V AC	12V DC	0.80A	3.00A	5"(L) x 2-1/8"(W) x 2"(D)
UCM40L12DC	40W max	120V AC	12V DC	1.25A	5.00A	5"(L) x 2-1/8"(W) x 2"(D)
UCM50L12DC	50W max	120V AC	12V DC	1.25A	5.00A	6"(L) x 2-5/8"(W) x 2-1/4"(D)
UCM100L12DC	100W max	120V AC	12V DC	2.00A	13.00A	9-1/8"(L) x 3"(W) x 3"(D)
UCM150L12DC	150W max	120V AC	12V DC	2.00A	13.00A	9-1/8"(L) x 3"(W) x 3"(D)

24-VOLT

CATALOG NO.	MAX WATTAGE	OPERATING VOLTAGE		SELF-RESET		DIMENSIONS
		INPUT	OUTPUT	PRIMARY	SECONDARY	
UCM20L24DC	20W max	120V AC	24V DC	0.80A	1.50A	5"(L) x 2-1/8"(W) x 2"(D)
UCM40L24DC	40W max	120V AC	24V DC	1.25A	3.00A	5"(L) x 2-1/8"(W) x 2"(D)
UCM50L24DC	50W max	120V AC	24V DC	1.25A	4.00A	6"(L) x 2-1/2"(W) x 2-1/4"(D)
UCM96L24DC	100W max	120V AC	24V DC	2.00A	4.00A	7-1/2"(L) x 3"(W) x 3"(D)
UCM100L24DC	150W max	120V AC	24V DC	2.00A	10.00A	9-1/8"(L) x 3"(W) x 3"(D)
UCM150L24DC	300W max	120V AC	24V DC	5.00A	12.50A	9-3/4"(L) x 4"(W) x 3-1/2"(D)

