

# BR




## TECHNICAL SPECIFICATIONS:

- :: Watts: 7W, 15W and 18W
- :: Lumens: 525LM (7.5W), 680LM (9W), 1350~1400LM (17W)
- :: Voltage: 120V A/C 60Hz
- :: PF: ≥0.8
- :: Color: 3000K (Warm White) & 5000K (Cool White)
- :: SMD technology for harmonious output
- :: Aluminum housing
- :: CRI: >80
- :: Beam Angle: 120°
- :: Base: E26
- :: Lifespan: 35000 Hours
- :: Dimmable
- :: Operating Temp: -4~+113°F
- :: UL listed

## FEATURES:

- :: Long life—reduced re-lamping cost
- :: Contains No Mercury
- :: Emits no UV/IR light

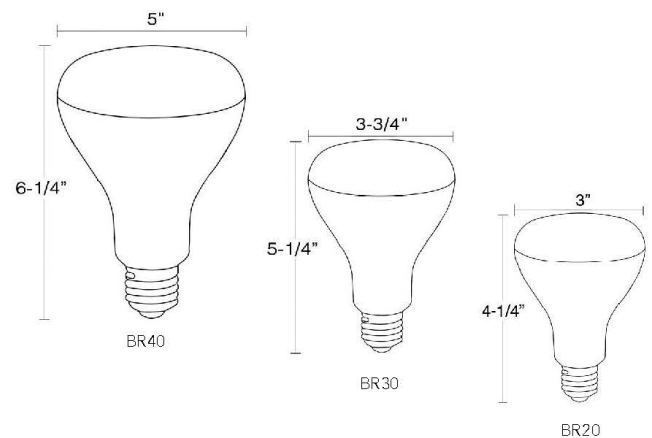

## BR SERIES

CATALOG NO.	WATTS	COLOR TEMP	LUMENS	BEAM	DIMENSION
BR20-7W-30K-D	7.5W	3000K	525LM	120°	3"(dia) X 4-1/4"(H)
BR20-7W-50K-D	7.5W	5000K	525LM	120°	
BR30-9W-30K-D	9W	3000K	680LM	120°	3-3/4"(dia) X 5-1/4"(H)
BR30-9W-50K-D	9W	5000K	680LM	120°	
BR40-17W-30K-D	17W	3000K	1350LM	120°	5"(dia) X 6-1/4"(H)
BR40-17W-50K-D	17W	5000K	1400LM	120°	

