

CDL2-M

WITH MICROWAVE MOTION SENSOR



TECHNICAL SPECIFICATIONS:

- :: Housing: Die-cast aluminum with prismatic polycarbonate lens redesigned for LED
- :: 1/2" threaded hubs located on two sides of the housing
- :: Voltage: 120~277V; 60Hz AC
- :: CRI: >80
- :: Power Factor: 90%
- :: Operating Temp: -40°F to 104°F

APPLICATIONS:


- :: Ideal for indoor parking lots, commercial buildings, schools, warehouses, retail centers, apartment complexes. Designed for 9 to 16-foot mounting



Microwave Motion Sensor

1. Daylight sensor turns light on when ambient light falls below preset illumination level.
2. When movement is detected, light is switched on.
3. No motion detected, dims to preset level after hold time.
4. After dimmed stand-by period, if no movement is detected, fixture is switched off.

All above settings are adjustable by DIP switches on the sensor

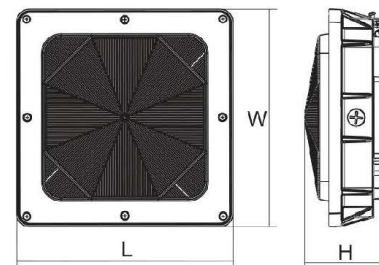

LED LOW PROFILE CANOPY / GARAGE LIGHT WITH MICROWAVE MOTION SENSOR

CATALOG NO.	WATTS	LUMENS	COLOR TEMP	BEAM ANGLE	REPLACEMENT RANGE	DIMENSIONS
CDL2-45CW-M	45W	4400LM	5000K	150°	100~150 MH	10" (L) x 10" (W) x 8" (H)

